

Doc 7030



Regional Supplementary Procedures

Approved by the Council
and published by authority of the Secretary General

Fifth Edition — 2008

International Civil Aviation Organization

Published in separate English, French, Russian and Spanish editions by the International Civil Aviation Organization. All correspondence, except orders and subscriptions, should be addressed to the Secretary General.

Orders should be sent to one of the following addresses, together with the appropriate remittance in U.S. dollars or in the currency of the country in which the order is placed. Customers are encouraged to use credit cards (MasterCard, Visa or American Express) to avoid delivery delays. Information on payment by credit card and by other methods is available in the Ordering Information Section of the *Catalogue of ICAO Publications and Audio-visual Training Aids*.

International Civil Aviation Organization. Attention: Document Sales Unit, 999 University Street, Montréal, Quebec, Canada H3C 5H7

Telephone: +1 514-954-8022; Facsimile: +1 514-954-6769; Sitatex: YULCAYA; E-mail: sales@icao.int;

World Wide Web: <http://www.icao.int>

Cameroon. KnowHow, 1, Rue de la Chambre de Commerce-Bonanjio, B.P. 4676, Douala / Telephone: +237 343 98 42; Facsimile: +237 343 89 25; E-mail: knowhow_doc@yahoo.fr

China. Glory Master International Limited, Room 434B, Hongshen Trade Centre, 428 Dong Fang Road, Pudong, Shanghai 200120

Telephone: +86 137 0177 4638; Facsimile: +86 21 5888 1629; E-mail: glorymaster@online.sh.cn

Egypt. ICAO Regional Director, Middle East Office, Egyptian Civil Aviation Complex, Cairo Airport Road, Heliopolis, Cairo 11776

Telephone: +20 2 267 4840; Facsimile: +20 2 267 4843; Sitatex: CAICAYA; E-mail: icaomid@cairo.icao.int

Germany. UNO-Verlag GmbH, August-Bebel-Allee 6, 53175 Bonn / Telephone: +49 0 228-94 90 2-0; Facsimile: +49 0 228-94 90 2-22;

E-mail: info@uno-verlag.de; World Wide Web: <http://www.uno-verlag.de>

India. Oxford Book and Stationery Co., 57, Medha Apartments, Mayur Vihar, Phase-1, New Delhi – 110 091

Telephone: +91 11 65659897; Facsimile: +91 11 22743532

India. Sterling Book House – SBH, 181, Dr. D. N. Road, Fort, Bombay 400001

Telephone: +91 22 2261 2521, 2265 9599; Facsimile: +91 22 2262 3551; E-mail: sbh@vsnl.com

India. The English Book Store, 17-L Connaught Circus, New Delhi 110001

Telephone: +91 11 2341-7936, 2341-7126; Facsimile: +91 11 2341-7731; E-mail: ebs@vsnl.com

Japan. Japan Civil Aviation Promotion Foundation, 15-12, 1-chome, Toranomon, Minato-Ku, Tokyo

Telephone: +81 3 3503-2686; Facsimile: +81 3 3503-2689

Kenya. ICAO Regional Director, Eastern and Southern African Office, United Nations Accommodation, P.O. Box 46294, Nairobi

Telephone: +254 20 7622 395; Facsimile: +254 20 7623 028; Sitatex: NBOCAYA; E-mail: icao@icao.unon.org

Mexico. Director Regional de la OACI, Oficina Norteamérica, Centroamérica y Caribe, Av. Presidente Masaryk No. 29, 3^{er} Piso,

Col. Chapultepec Morales, C.P. 11570, México D.F. / Teléfono: +52 55 52 50 32 11; Facsimile: +52 55 52 03 27 57;

Correo-e: icao_nacc@mexico.icao.int

Nigeria. Landover Company, P.O. Box 3165, Ikeja, Lagos

Telephone: +234 1 4979780; Facsimile: +234 1 4979788; Sitatex: LOSLORK; E-mail: aviation@landovercompany.com

Peru. Director Regional de la OACI, Oficina Sudamérica, Av. Víctor Andrés Belaúnde No. 147, San Isidro, Lima (Centro Empresarial Real, Vía Principal No. 102, Edificio Real 4, Floor 4)

Teléfono: +51 1 611 8686; Facsimile: +51 1 611 8689; Correo-e: mail@lima.icao.int

Russian Federation. Aviaizdat, 48, Ivan Franko Street, Moscow 121351 / Telephone: +7 095 417-0405; Facsimile: +7 095 417-0254

Senegal. Directeur régional de l'OACI, Bureau Afrique occidentale et centrale, Boîte postale 2356, Dakar

Téléphone: +221 839 9393; Fax: +221 823 6926; Sitatex: DKRCAYA; Courriel: icaodkr@icao.sn

Slovakia. Air Traffic Services of the Slovak Republic, Letové prevádzkové služby Slovenskej Republiky, State Enterprise,

Letisko M.R. Štefánika, 823 07 Bratislava 21 / Telephone: +421 2 4857 1111; Facsimile: +421 2 4857 2105; E-mail: sa.icao@lps.sk

South Africa. Avex Air Training (Pty) Ltd., Private Bag X102, Halfway House, 1685, Johannesburg

Telephone: +27 11 315-0003/4; Facsimile: +27 11 805-3649; E-mail: avex@iafrica.com

Spain. A.E.N.A. — Aeropuertos Españoles y Navegación Aérea, Calle Juan Ignacio Luca de Tena, 14, Planta Tercera, Despacho 3. 11,

28027 Madrid / Teléfono: +34 91 321-3148; Facsimile: +34 91 321-3157; Correo-e: sscc.ventasaoaci@aena.es

Switzerland. Adeco-Editions van Diermen, Attn: Mr. Martin Richard Van Diermen, Chemin du Lacuez 41, CH-1807 Blonay

Telephone: +41 021 943 2673; Facsimile: +41 021 943 3605; E-mail: mvandiermen@adeco.org

Thailand. ICAO Regional Director, Asia and Pacific Office, P.O. Box 11, Samyae Ladprao, Bangkok 10901

Telephone: +66 2 537 8189; Facsimile: +66 2 537 8199; Sitatex: BKKCAYA; E-mail: icao_apac@bangkok.icao.int

United Kingdom. Airplan Flight Equipment Ltd. (AFE), 1a Ringway Trading Estate, Shadowmoss Road, Manchester M22 5LH

Telephone: +44 161 499 0023; Facsimile: +44 161 499 0298; E-mail: enquiries@afeonline.com; World Wide Web: <http://www.afeonline.com>

5/07

Catalogue of ICAO Publications and Audio-visual Training Aids

Issued annually, the Catalogue lists all publications and audio-visual training aids currently available. Supplements to the Catalogue announce new publications and audio-visual training aids, amendments, supplements, reprints, etc.

Available free from the Document Sales Unit, ICAO.

Doc 7030



Regional Supplementary Procedures

**Approved by the Council
and published by authority of the Secretary General**

Fifth Edition — 2008

International Civil Aviation Organization

AMENDMENTS

The issue of amendments is announced regularly in the *ICAO Journal* and in the supplements to the *Catalogue of ICAO Publications and Audio-visual Training Aids*, which holders of this publication should consult. The space below is provided to keep a record of such amendments.

RECORD OF AMENDMENTS AND CORRIGENDA

[illegible][illegible]

TABLE OF CONTENTS — GENERAL

	<i>Page</i>
Foreword	(v)
Procedure for the amendment of Regional Supplementary Procedures	(vii)
Glossary	(xi)
Index to Application of Supplementary Procedures	(xiii)
Africa-Indian Ocean (AFI) Regional Supplementary Procedures Table of Contents	AFI (i)
Caribbean (CAR) Regional Supplementary Procedures Table of Contents	CAR (i)
European (EUR) Regional Supplementary Procedures Table of Contents	EUR (i)
Middle East/Asia (MID/ASIA) Regional Supplementary Procedures Table of Contents	MID/ASIA (i)
North America (NAM) Regional Supplementary Procedures Table of Contents	NAM (i)
North Atlantic (NAT) Regional Supplementary Procedures Table of Contents	NAT (i)
Pacific (PAC) Regional Supplementary Procedures Table of Contents	PAC (i)
South American (SAM) Regional Supplementary Procedures Table of Contents	SAM (i)

The designations employed and the presentation of the material in this publication do not imply the expression of any opinion whatsoever on the part of ICAO concerning the legal status of any country, territory, city or area or of its authorities, or concerning the delimitation of its frontiers or boundaries.

FOREWORD

1. The ICAO Regional Supplementary Procedures (SUPPS) form the procedural part of the Air Navigation Plans developed by Regional Air Navigation (RAN) Meetings to meet those needs of specific areas which are not covered in the worldwide provisions. They complement the statement of requirements for facilities and services contained in the Air Navigation Plan publications. Procedures of worldwide applicability are included either in the Annexes to the Convention on International Civil Aviation as Standards or Recommended Practices, or in the Procedures for Air Navigation Services (PANS).

2. In the development of Regional Supplementary Procedures, the following criteria must be satisfied:

- a) Regional Supplementary Procedures should indicate a mode of implementing procedural provisions in Annexes and PANS, as distinct from a statement or description of required facilities and services as published in the Air Navigation Plan publications. Regional Supplementary Procedures may also indicate permissible additions to provisions in Annexes and PANS, subject to the restrictions in b) and c).
- b) Regional Supplementary Procedures must **not** be in conflict with the provisions contained in the Annexes or PANS. They must either specify detailed procedural regional options for those provisions or promulgate a regional procedure of justifiable operational significance, additional to existing provisions in Annexes or PANS.
- c) In the drafting of Regional Supplementary Procedures, variations in the text of procedures with similar intent applicable to more than one area should be avoided.

3. The Regional Supplementary Procedures do not have the same status as Standards and Recommended Practices. The latter are **adopted** by Council in pursuance of Article 37 of the Convention on International Civil Aviation, subject to the full procedure of Article 90. PANS are **approved** by the President of the Council of ICAO on behalf of the Council and SUPPS are **approved** by the Council; the PANS are recommended to Contracting States for worldwide use, whilst the SUPPS are recommended to Contracting States for application in the groups of flight information regions to which they are relevant.

4. PANS were originally developed from common recommendations of regional meetings and were given worldwide application by the ICAO Council after action thereon by ICAO Divisions. Subsequently, there has been a gradual evolution of procedures from the regional to the worldwide category as ICAO Divisions have been able to adapt regionally developed procedures to worldwide requirements. Concurrently, some of the worldwide procedures have been found suitable for classification as Standards or Recommended Practices and therefore are gradually being incorporated into the Annexes to the Convention.

5. Application of the Regional Supplementary Procedures in certain areas of the world has been specified according to groups of flight information regions (FIRs) as shown on page (xiii). The abbreviations on the chart identifying the groups of flight information regions in which specific sets of SUPPS apply have been chosen in reference to ICAO region designators, but the limits of the areas of application do not necessarily coincide with the boundaries of the ICAO regions.

6. Whenever there is a specific relationship between a supplementary procedure and an Annex or PANS, such relationship has been indicated by reference to the parent document and relevant chapter, appendix, etc. These references appear above the text, together with the appropriate abbreviation as follows:

A — Annexes to the Convention
P — Procedures for Air Navigation Services

Examples: (A2 – Chapter 3) — Refers to Chapter 3 of Annex 2 — *Rules of the Air*
(P-ATM – Chapters 7 and 9) — Refers to Chapters 7 and 9 of Doc 4444 — *Procedures for Air Navigation Services — Air Traffic Management*.

7. The degree of non-application of the Regional Supplementary Procedures or national differences are notified in Aeronautical Information Publications in accordance with the provisions of Annex 15 — *Aeronautical Information Services* (cf. 4.1.1, 4.1.2 c) and Appendix 1).

8. This document is maintained by amendments as required. Any errors or omissions should be brought to the attention of the Secretary General, ICAO, 999 University Street, Montréal, Quebec, Canada H3C 5H7.

PROCEDURE FOR THE AMENDMENT OF REGIONAL SUPPLEMENTARY PROCEDURES

(Approved by Council (25-2) 20/5/55, (84-5) 7/3/75, (153-3) 25/2/98)

1. INTRODUCTION

1.1 Regional Supplementary Procedures are normally formulated at regional air navigation meetings and become effective after review by the Air Navigation Commission and approval by the Council.

1.2 Amendments to Regional Supplementary Procedures may be proposed by a Contracting State or group of States as set out in Section 2 or by an international organization as set out in Section 3 or may become necessary as a consequence of action by Council in adopting or amending Standards and Recommended Practices or in approving or amending Procedures for Air Navigation Services as set out in Section 4.

2. AMENDMENTS PROPOSED BY A CONTRACTING STATE OR GROUP OF STATES

2.1 If any Contracting State or group of States of a region wishes to propose an amendment to Regional Supplementary Procedures for that region, it should submit the proposal, adequately documented, to the Secretary General through the Regional Office accredited to that State. The proposal should include the facts that led the State to the conclusion that the amendment is necessary.

2.2 The Secretary General will circulate the proposal, adequately documented, with a request for comments to all provider and user States of the region considered affected, as well as to user States outside the region and international organizations that may be concerned with the proposal. If, however, the Secretary General considers that the proposed amendment conflicts with established ICAO policy or that it raises questions which the Secretary General considers should be brought to the attention of the Air Navigation Commission, the proposal will be first presented, adequately documented, to the Commission. In such cases, the Commission will decide on the action to be taken.

2.3 If, in reply to the Secretary General's inquiry to States and selected international organizations, no objection is raised to the proposal by a specified date, the Secretary General will circulate an amendment memorandum to Representatives on the Council and to Members of the Air Navigation Commission inviting each recipient to advise, normally within seven days,* whether formal discussion of the proposed amendment is desired. The memorandum will explain the proposed amendment, summarize the comments received and include Secretariat comments as appropriate. If, in reply to the Secretary General's inquiry to States and selected international organizations, any objection is raised and if the objection remains after further consultation, the matter will be documented for formal consideration by the Air Navigation Commission and appropriate recommendations of the Commission to the Council.

2.4 If, at the end of the seven-day period,* there has been no request for discussion of the amendment, it will be submitted to the President of the Council who is authorized to approve the amendment on behalf of the Council.

* During recess, a period of three weeks will normally be allowed.

2.5 If, on the other hand, any Representative on the Council or Member of the Air Navigation Commission indicates a desire for formal discussion of the proposed amendment, the matter will be documented for formal consideration by the Commission and appropriate recommendations of the Commission to the Council.

3. AMENDMENTS PROPOSED BY INTERNATIONAL ORGANIZATIONS

3.1 Proposals for the amendment of Regional Supplementary Procedures submitted by international organizations directly concerned with the operation of aircraft, which may be invited to attend suitable ICAO meetings and which attended the meeting(s) where the relevant procedures were prepared, will be dealt with in the same manner as those received from States, except that, before circulating a proposal to States and selected international organizations pursuant to 2.2, the Secretary General will ascertain whether it has adequate support from the State or group of States whose facilities, services and procedures will be affected. If such support is not forthcoming, the proposal will be presented to the Commission, and the Commission will decide on the action to be taken.

4. CONSEQUENTIAL AMENDMENTS

4.1 In the event of an amendment to Regional Supplementary Procedures becoming necessary as a consequence of action by Council in adopting or amending Standards and Recommended Practices or in approving or amending Procedures for Air Navigation Services, the amendment will be drafted by the Secretary General.

4.2 The Secretary General will circulate the amendment, together with relevant explanatory material, in a memorandum to each Member of the Air Navigation Commission inviting each recipient to notify him, normally within seven days,* whether formal discussion of the proposed amendment is desired.

4.3 If, at the end of the seven-day period,* there has been no request for discussion of the amendment, formal approval will be given by the Air Navigation Commission acting on behalf of the Council** or, if the Commission is in recess, by the President of the Council.

4.4 If any Commissioner indicates a desire for formal discussion of the amendment, the matter will be documented for formal consideration by the Air Navigation Commission. If the Commission concludes that the amendment is necessary, it is authorized to approve the amendment on behalf of the Council,** in its original form or modified.

5. PROMULGATION OF APPROVED AMENDMENTS

5.1 Amendments to Regional Supplementary Procedures that have been approved in accordance with the above procedures will be promulgated in Doc 7030, *Regional Supplementary Procedures*.

* During recess, a period of three weeks will normally be allowed.

** The Air Navigation Commission has been authorized [17-1, Doc 7328-1, (C/853-1)] to approve consequential amendments on behalf of the Council.

Glossary

ACAS	airborne collision avoidance systems
ACC	area control centre
ADLP	aircraft data link processor
ADS-B	automatic dependent surveillance – broadcast
ADS-C	automatic dependent surveillance – contract
AFCS	automatic flight control system
AFTN	aeronautical fixed telecommunication network
AIM	ATFM information message
AIP	aeronautical information publication
AIRAC	aeronautical information regulation and control
AIS	aeronautical information service
ANM	ATFM notification message
ANP	air navigation plan
ARO	air traffic services reporting office
ASDA	accelerate-stop distance available
ASE	altimetry system error
ASTER	ATFM system of the EUR region
ATC	air traffic control
ATFM	air traffic flow management
ATIS	automatic terminal information services
ATM	air traffic management
ATS	air traffic service

B-RNAV basic area navigation


CAP	Code allocation plan
CARSAMMA	CAR/SAM monitoring agency
CFMU	central flow management unit
CHG	modification message
CNL	cancellation message
CPDLC	controller-pilot data link communications
CRAM	conditional route availability message
CTA	control area
CTOT	calculated take-off time

DAP	downlink aircraft parameter
DES	de-suspension message
DME	distance-measuring equipment
DOF	date of flight

EAD	European AIS database
EOBT	estimated off-block time

FIR	flight information region
FIS	flight information service
FL	flight level
FLAS	flight level allocation scheme
FLS	flight suspension message
FPL	flight plan
GAT	general air traffic
HF	high frequency
IFBP	in-flight broadcast by pilots
IFF	identification friend/foe
IFPS	initial flight plan processing system
IFR	instrument flight rules
IGA	international general aviation
INS	inertial navigation system
LAM	logical acknowledgement message
MASPS	minimum aviation system performance standards
MFA	minimum flight altitude
MNPS	minimum navigation performance specifications
MSA	minimum sector altitude
NOF	NOTAM offices
NOTAM	notice to airmen
OCA	oceanic control area
OTS	organized track system
PACOTS	Pacific organized track systems
PIB	pre-flight information bulletin
P-RNAV	precision area navigation
RFP	replacement flight plan
RNAV	area navigation
RNP	required navigation performance
RPL	repetitive flight plan
RTF	radiotelephony
RVR	runway visual range
RVSM	reduced vertical separation minimum

SAM	slot allocation message
SRM	slot revision message
SATMA	South Atlantic monitoring agency
SAT NAV	satellite navigation
SATCOM	satellite voice communications
SD	standard deviation
SELCAL	selective calling
SID	standard instrument departure
SIF	selective identification feature
SLC	slot cancellation message
SLOP	strategic lateral offset procedures
SSR	secondary surveillance radar
STAR	standard instrument arrival
STS	special handling
TA	transition altitude
TAS	true airspeed
TLS	target level of safety
TMA	terminal control area
TODA	take-off distance available
TORA	take-off run available
TVE	total vertical error
UAC	upper area control centre
UIR	upper flight information region
VSM	vertical separation minimum
VFR	visual flight rules
VOLMET	meteorological information for aircraft in flight
VOR	VHF omnidirectional radio range
WATRS	West Atlantic Route System

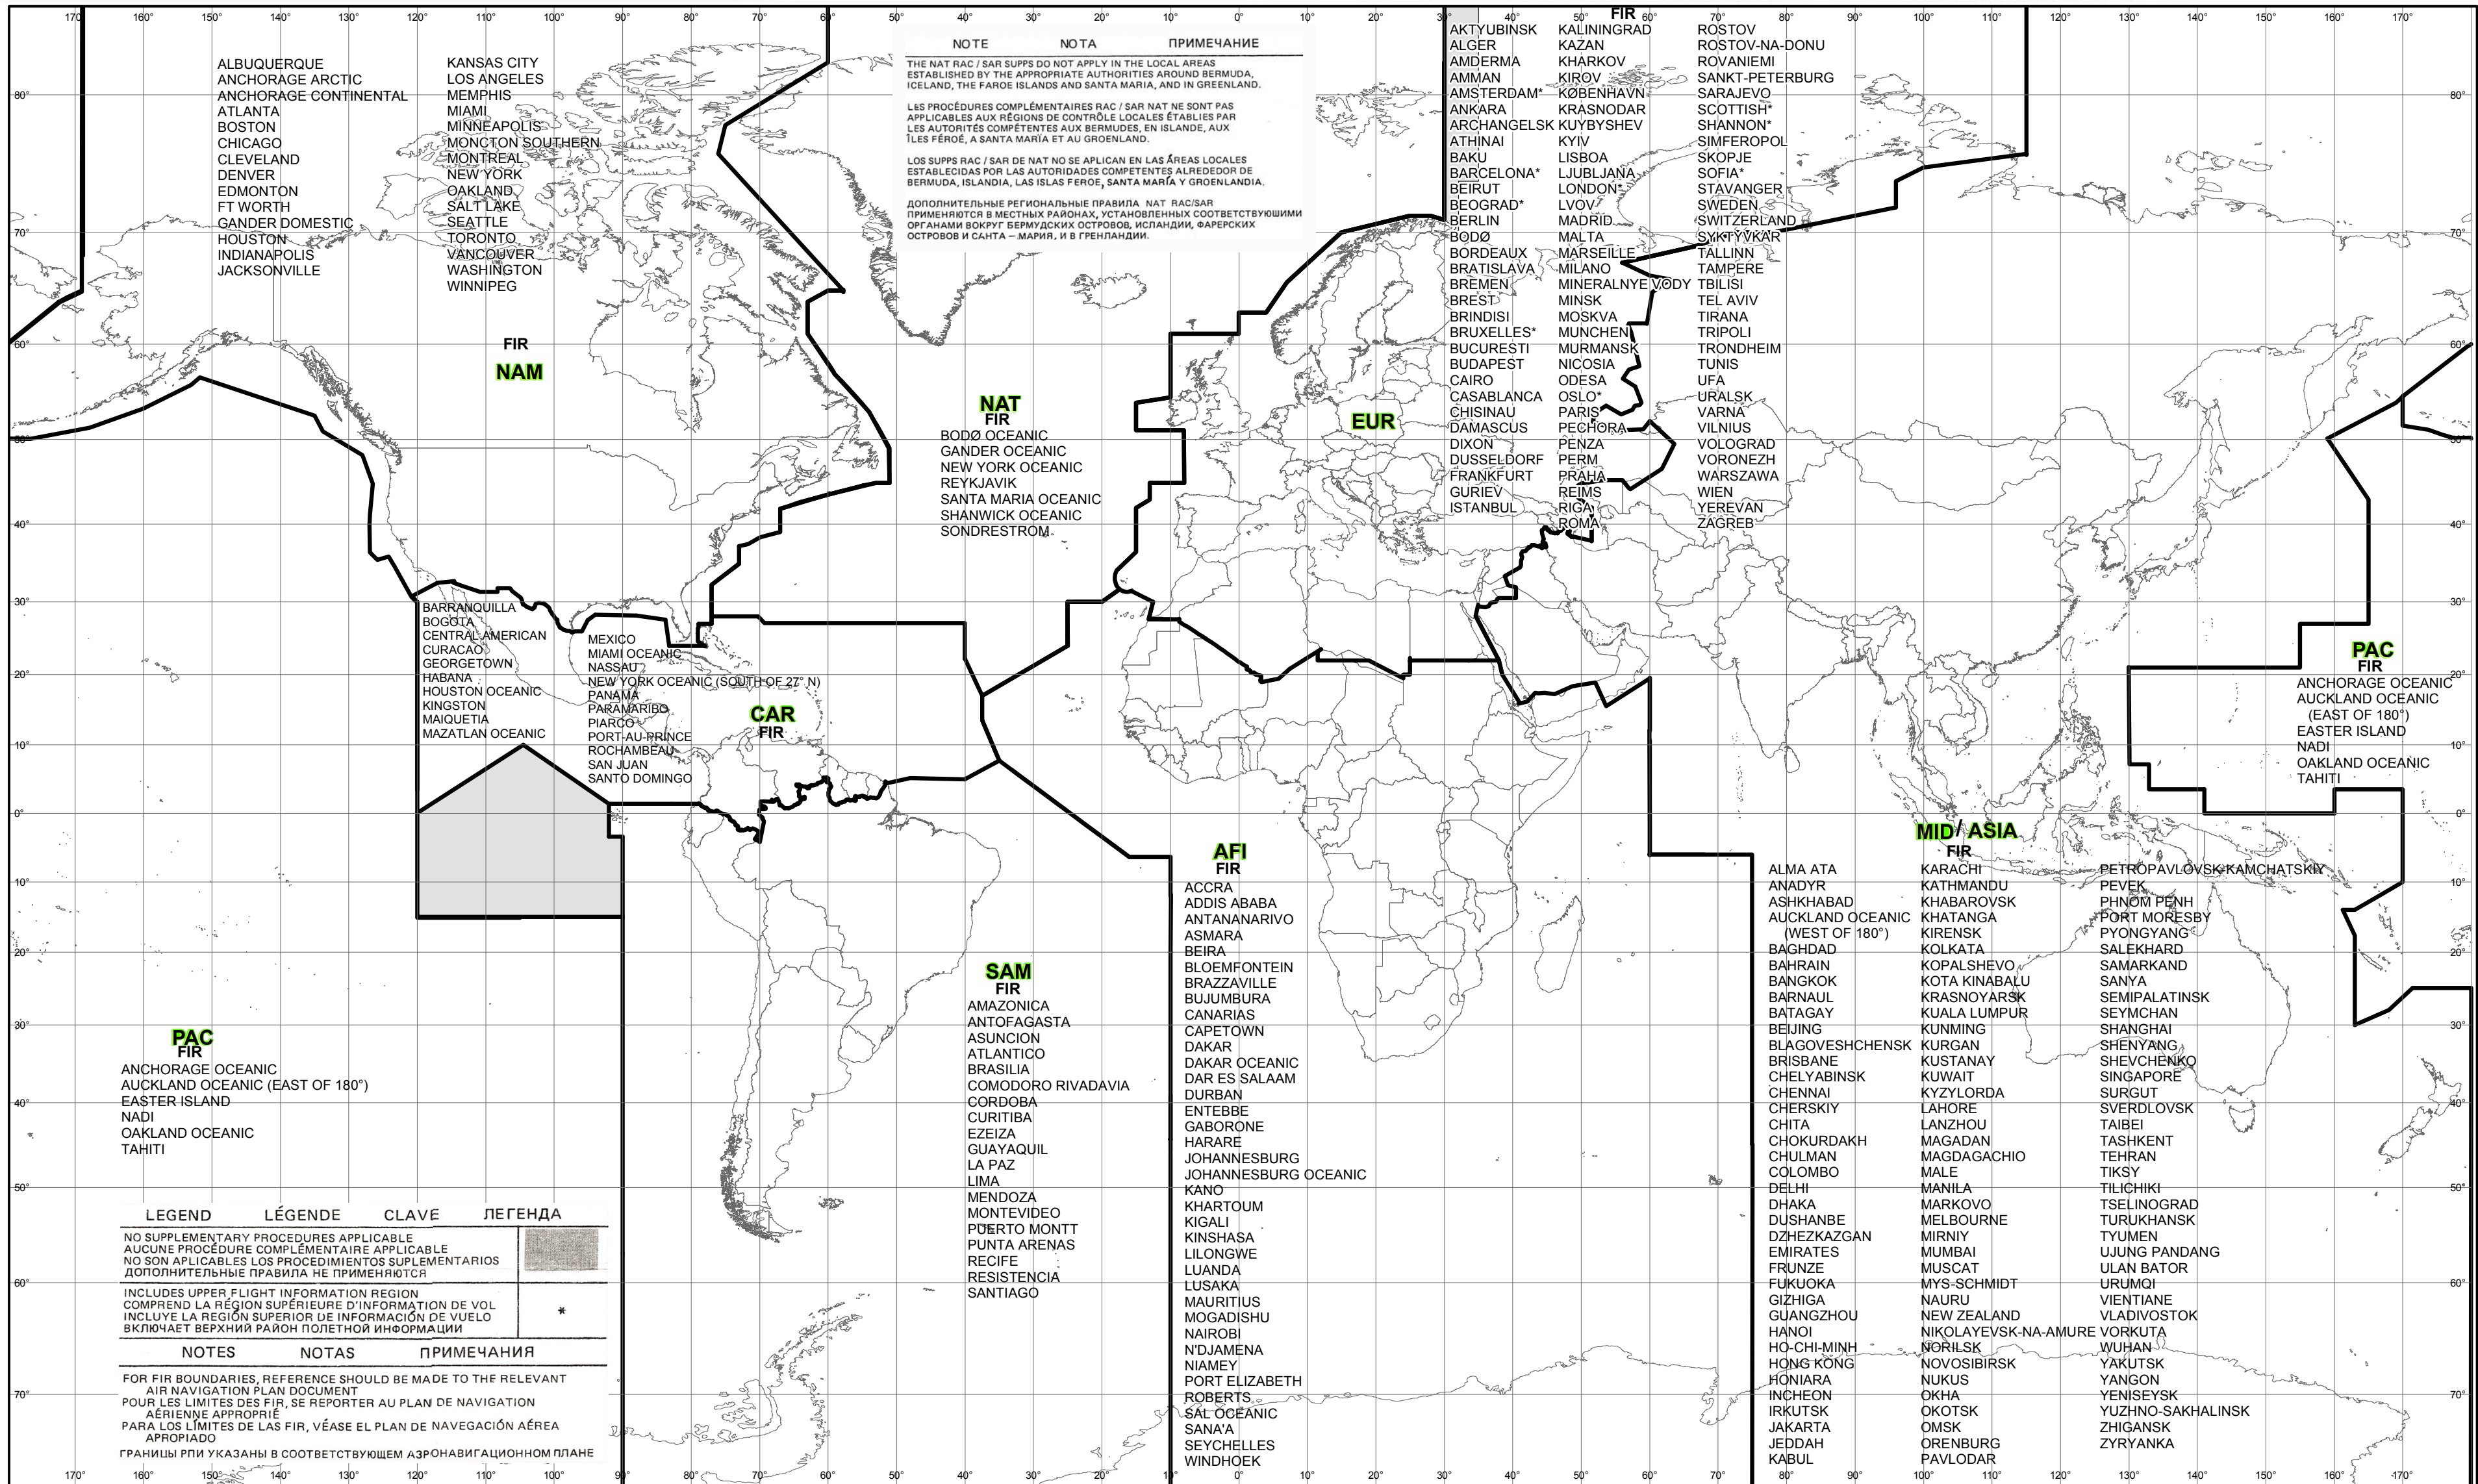

AFRICA-INDIAN OCEAN (AFI) REGIONAL SUPPLEMENTARY PROCEDURES

These procedures are supplementary to the provisions contained in Annex 2, Annex 6 (Parts I, II and III), Annex 11, PANS-ATM (Doc 4444) and PANS-OPS (Doc 8168). The area of application of the AFI Regional Supplementary Procedures is included on the Index to Application of Supplementary Procedures chart.

TABLE OF CONTENTS

	<i>Chapter</i>	<i>Page</i>
Flight Rules	1	AFI 1-1
Flight Plans	2	AFI 2-1
Communications	3	AFI 3-1
Navigation	4	AFI 4-1
Surveillance	5	AFI 5-1
Air Traffic Services	6	AFI 6-1
Safety Monitoring	7	AFI 7-1
Air Traffic Flow Management	8	AFI 8-1
Special Procedures	9	AFI 9-1
Phraseology	10	AFI 10-1
Search and Rescue	11	AFI 11-1
Meteorology	12	AFI 12-1
Aeronautical Information Services	13	AFI 13-1

Chapter 1. FLIGHT RULES

1.1 VISUAL FLIGHT RULES (VFR)

(A2 – Chapter 4)

1.1.1 Special application

1.1.1.1 VFR flights to be operated in specified portions of terminal control areas (TMAs) of selected aerodromes serving international flights shall:

- a) have two-way radio communications;
- b) obtain clearance from the appropriate ATC unit; and
- c) report positions, as required.

Note.— The phrase “specified portions of terminal control areas” is intended to signify at least those portions of the TMA used by international IFR flights in association with approach, holding, departure and noise abatement procedures.

1.2 INSTRUMENT FLIGHT RULES (IFR)

(A2 – Chapters 2 and 5)

Note.— Annex 2, 2.2, permits a flight to operate using either instrument flight rules or visual flight rules when operated in visual meteorological conditions subject to the limitations listed in Chapter 4 of the Annex. The following indicates certain additional restrictions.

1.2.1 Special application

1.2.1.1 Flights shall be conducted in accordance with instrument flight rules when operated above flight level (FL) 150.

1.2.2 Flight level changes

(A2 – Chapter 5)

1.2.2.1 All changes of flight levels required by transition from the system of designated cruising levels for flights along controlled routes to the semicircular system of cruising levels, or vice versa, shall be made at points within controlled airspace.

1.2.2.2 The specific points to be used for the changes of flight levels mentioned in 1.2.2.1 shall be the subject of coordination between the ATS units concerned, bearing in mind the need to avoid points over boundaries or other points where transfer of communications/transfer of responsibility would be adversely affected.

1.3 AIR TRAFFIC ADVISORY SERVICE

(P-ATM – Chapter 9)

Note.— The PANS-ATM leaves it to the discretion of the pilot whether or not to obtain air traffic advisory service, where available. Obtaining air traffic advisory service is obligatory, however, when operating in Class F airspace.

1.3.1 All IFR flights shall comply with the procedures for air traffic advisory service when operating in Class F airspace.

Chapter 2. FLIGHT PLANS

2.1 CONTENT – GENERAL

(A2 – Chapter 3; P-ATM – Chapter 4 and Appendix 2)

2.1.1 Date of flight

Nil.

2.1.2 Area navigation (RNAV) specifications

Nil.

2.1.3 Required navigation performance (RNP) specifications

2.1.3.1 The letter R shall be inserted in Item 10 (Equipment) of the flight plan to indicate the aircraft meets the RNP type prescribed, has been appropriately approved and can comply with all conditions of that approval.

2.1.4 Minimum navigation performance specifications (MNPS)

Nil.

2.1.5 Reduced vertical separation minimum (RVSM)-approved aircraft

2.1.5.1 The letter W shall be inserted in Item 10 (Equipment) of the flight plan or Item Q of the repetitive flight plan (RPL) if the aircraft and operator have received RVSM State approval, regardless of the requested flight level. The aircraft registration shall be inserted in Item 18 of the flight plan.

2.1.6 Non-RVSM-approved aircraft

Note.— Non-RVSM aircraft intending to operate above FL 410 will need to flight plan in accordance with RVSM procedures of neighbouring regions, should the flight commence or terminate in those regions.

2.1.7 Non-RVSM-approved State aircraft

2.1.7.1 Operators of non-RVSM-approved State aircraft with a requested flight level of 290 or above shall insert STS/NON RVSM in Item 18 of the flight plan.

Note.— Non-RVSM aircraft intending to operate above FL 410 will need to flight plan in accordance with RVSM procedures of neighbouring regions, should the flight commence or terminate in those regions.

2.1.8 Indication of 8.33 kHz channel spacing capability

Nil.

2.1.9 Route

Nil.

2.1.10 Estimated times

Nil.

2.1.11 Mach number

2.1.11.1 For turbo-jet aircraft intending to operate at or above FL 250 within FIR Canarias, the planned true Mach number shall be specified in Item 15 of the flight plan.

2.1.12 Alternative flight level

Nil.

2.1.13 Special handling (STS)

Nil.

2.2 CONTENT – AIR TRAFFIC FLOW MANAGEMENT (ATFM)**2.2.1 Runway visual range (RVR)**

Nil.

2.2.2 Flight plan addressing and distribution

Nil.

2.2.3 Slot allocation exemptions

Nil.

2.3 SUBMISSION

(A2 – Chapter 3)

2.3.1 General

2.3.1.1 When exercising the Annex 2 provision in 3.3.1.4 to prescribe a lead time for the submission of a flight plan other than 60 minutes before departure, the appropriate ATS authority shall prescribe a period of not less than 30 minutes.

2.3.2 Amendments

Nil.

2.4 REPETITIVE FLIGHT PLANS (RPLs)

Nil.

Chapter 3. COMMUNICATIONS

3.1 AIR-GROUND COMMUNICATIONS AND IN-FLIGHT REPORTING

3.1.1 Communications equipment

3.1.2 Continuous listening watch in uncontrolled airspace (A2 – Chapters 3 and 5; P-ATM – Chapter 4)

3.1.2.1 All VFR flights, and IFR flights outside controlled airspace, shall maintain a listening watch on the frequency where flight information service is provided and report position unless otherwise authorized by the State overflown.

3.1.3 Position reports

Nil.

3.1.4 Abbreviated position reports

Nil.

3.1.5 Read-back of VHF channels

Nil.

3.2 MANDATORY CARRIAGE OF 8.33 KHZ CHANNEL SPACING CAPABLE RADIO EQUIPMENT

Nil.

3.3 CONTROLLER-PILOT DATA LINK COMMUNICATIONS (CPDLC)

Nil.

3.4 SATELLITE VOICE COMMUNICATIONS (SATCOM)

Nil.

3.5 AERONAUTICAL MOBILE SERVICE

3.5.1 Selective calling (SELCAL)

Nil.

3.5.2 HF operations

Nil.

3.6 AERONAUTICAL FIXED SERVICE

3.6.1 AFTN rationalization

Nil.

3.7 RADIO CHANNELS/FREQUENCIES

Nil.

Chapter 4. NAVIGATION

4.1 PERFORMANCE-BASED NAVIGATION (PBN)

Note.— As the Africa-Indian Ocean (AFI) Region transitions to PBN as contained in the Performance-based Navigation Manual (Doc 9613), the contents of 4.1 will be amended.*

4.1.1 Area navigation (RNAV) specifications

4.1.1.1 RNAV 10 (RNP 10)

Note.— RNAV 10 retains the RNP 10 designation, as specified in the Performance-based Navigation Manual (Doc 9613), 1.2.3.5.*

Area of applicability

4.1.1.1.1 For flights on designated controlled oceanic routes or areas within the Canarias FIR (southern sector), Dakar Oceanic, Recife and Sal Oceanic FIRs, and on designated routes over continental Africa, a lateral separation minimum of 93 km (50 NM) may be applied.

4.1.1.1.2 For flights in the EUR/SAM corridor (Canarias (southern sector), Dakar Oceanic, Recife and Sal Oceanic FIRs), a longitudinal separation minimum of 93 km (50 NM) derived by RNAV may be applied between RNAV-equipped aircraft approved to RNP 10 or better, in accordance with the provisions of the PANS-ATM, 5.4.2.6.

4.1.1.1.3 Longitudinal distance-based separation minima of 93 km (50 NM) between RNAV aircraft on the same track on RNP 10 routes over continental Africa shall not be used.

Means of compliance

4.1.1.1.4 For application of 4.1.1.1.1 and 4.1.1.1.2, the aircraft and the operator must have been approved by the State of Registry or the State of the Operator, as appropriate, to meet the following requirements (or equivalent):

- a) aircraft are approved to RNP 10 in accordance with provisions contained in the *Performance-based Navigation Manual* (Doc 9613);* and
- b) operator programmes shall be established to mitigate the occurrence of large navigational errors due to equipment malfunction or operational error:
 - 1) operator in-flight operating drills shall include mandatory navigation cross-checking procedures to identify navigation errors in sufficient time to prevent aircraft from inadvertent deviation from an ATC-cleared route; and

* In preparation.

- 2) the operator shall establish programmes to provide for the continued airworthiness of aircraft navigation systems necessary to navigate to the degree of accuracy required.

*Note.— Detailed guidance material on RNP is contained in the Performance-based Navigation Manual (Doc 9613).**

4.1.1.2 RNAV 5

Nil.

4.1.1.3 RNAV 2

Nil.

4.1.1.4 RNAV 1

Nil.

4.1.1.5 Pre-PBN navigation specifications

Nil.

4.1.2 Required navigation performance (RNP) specifications

4.1.2.1 RNP 4

Nil.

4.1.2.2 Basic RNP 1

Nil.

4.1.2.3 Advanced RNP 1

Nil.

4.2 REDUCED VERTICAL SEPARATION MINIMUM (RVSM)

Area of applicability

4.2.1 A minimum vertical separation of 300 m (1 000 ft) between RVSM-approved aircraft shall be applied between FL 290 and FL 410 inclusive in the following FIRs:

* In preparation.

Accra, Addis Ababa, Antananarivo, Asmara, Beira, Brazzaville, Canarias, Cape Town, Dakar, Dakar Oceanic, Dar es Salaam, Entebbe, Gaborone, Harare, Johannesburg, Johannesburg Oceanic, Kano, Khartoum, Kinshasa, Lilongwe, Luanda, Lusaka, Mauritius, Mogadishu, Nairobi, N'Djamena, Niamey, Roberts, Sal Oceanic, Seychelles, Tripoli and Windhoek.

Means of compliance

(A2 – Chapter 5 and Appendix 3; A6, Part I – Chapters 3, 4 and 7;
A6, Part II – Chapters 3 and 7; A8, Part IIIA – Chapter 8; A11 – Chapter 2)

4.2.2 Operators intending to conduct flights within the AFI Region where RVSM is applied shall require an RVSM approval from either the State of Registry or the State of the Operator. The State of Registry or the State of the Operator, as appropriate, should verify that the height-keeping performance capability of approved aircraft meets the requirements specified in Annex 6, Parts I and II.

Chapter 5. SURVEILLANCE

(P-ATM – Chapter 8; P-OPS, Vol. I, Part III)

5.1 SECONDARY SURVEILLANCE RADAR (SSR)

5.1.1 Carriage of pressure-altitude reporting SSR transponders

5.1.1.1 All aircraft operating as IFR flights in the AFI Region shall be equipped with a pressure-altitude reporting SSR transponder.

5.1.1.2 Unless otherwise directed by air traffic control, the last assigned SSR (Mode A) code shall be retained. If no SSR code has been assigned, Mode A code 2000 shall be selected and retained.

5.1.2 Code allocation methodology

Nil.

5.1.3 Assignment of SSR codes

Nil.

5.1.4 Operation of pressure-altitude reporting SSR transponders

Nil.

5.1.5 Monitoring of SSR-derived information

Nil.

5.2 SSR MODE S

5.2.1 Carriage and operation of SSR Mode S

Nil.

5.2.2 Transition between Mode A/C and Mode S

Nil.

5.3 AIRBORNE COLLISION AVOIDANCE SYSTEMS (ACAS)

5.3.1 Carriage and operation of ACAS II

Nil.

5.4 AUTOMATIC DEPENDENT SURVEILLANCE – CONTRACT (ADS-C)

Nil.

5.5 AUTOMATIC DEPENDENT SURVEILLANCE – BROADCAST (ADS-B)

Nil.

Chapter 6. AIR TRAFFIC SERVICES

6.1 AIR TRAFFIC CONTROL (ATC) CLEARANCES

(A11 – Chapter 3; P-ATM – Chapter 4)

6.1.1 Content

6.1.1.1 Only RVSM-approved aircraft shall be issued an air traffic control clearance to enter and operate within the AFI RVSM airspace. Non-RVSM-approved State aircraft shall, subject to ATM capacity, be issued a clearance to operate within the AFI RVSM airspace.

6.1.1.2 Non-RVSM-approved aircraft intending to operate above FL 410 will be required to have the capability to execute an uninterrupted climb or descent through the AFI RVSM airspace. Such flights shall be given appropriate ATC clearances, which will be subject to traffic levels at the time clearance is requested.

6.1.1.3 Air traffic control clearance into AFI RVSM airspace shall not be issued to formation flights.

6.1.2 Adherence

Nil.

6.2 SEPARATION

6.2.1 Lateral

(A11 – Attachment B; Doc 9613,* Vol. II, Part B; P-ATM – Chapters 5 and 15)

6.2.1.1 Minimum lateral separation shall be 185 km (100 NM) except as provided for in 6.2.1.2 and 6.2.1.3.

6.2.1.2 Where aircraft are transiting into airspace with a larger lateral minimum than the airspace being exited, lateral separation will continue to exist provided that:

- a) the smaller separation minimum exists;
- b) flight paths diverge by 15 degrees or more until the larger minimum is established; and
- c) it is possible to ensure, by means approved by the appropriate ATS authority, that the aircraft have navigation capability necessary to ensure accurate track guidance.

6.2.1.3 Minimum lateral separation shall be 93 km (50 NM) between aircraft meeting the provisions in 4.1.1.1.

* In preparation.

6.2.2 Longitudinal (P-ATM – Chapter 5)

6.2.2.1 Except as provided for in 6.2.2.2, the minimum longitudinal separation between turbo-jet aircraft shall be:

- a) 20 minutes, except as specified below;
- b) 15 minutes at or above FL 250 within the Canarias, Dakar Oceanic, Recife and Sal Oceanic FIRs, provided that the Mach number technique is applied and, whether in level, climbing or descending flight, the aircraft have reported over the same entry point to the ATS routes or a common point into the oceanic-controlled airspace and follow the same track or continuously diverging tracks; or
- c) 10 minutes or 150 km (80 NM), derived by RNAV, when the Mach number technique is applied on designated controlled RNP 10 oceanic routes in the EUR/SAM corridor within the Dakar Oceanic, Recife and Sal Oceanic FIRs; or
- d) 10 minutes when the Mach number technique is applied on RNP 10 designated routes over continental Africa.

6.2.2.2 Minimum longitudinal separation shall be 93 km (50 NM) derived by RNAV between aircraft in the EUR/SAM corridor meeting the provisions of 4.1.1.1.

6.2.2.3 Longitudinal distance-based separation minima of 93 km (50 NM) between RNAV aircraft on the same track on RNP 10 routes over continental Africa shall not be used.

6.2.3 Composite

Nil.

6.2.4 Vertical

6.2.4.1 An RVSM of 300 m (1 000 ft) shall be applied between FL 290 and FL 410 inclusive within the FIRs specified in 4.2.1.

6.2.4.2 The minimum separation of 6.2.4.1 shall only be applied between aircraft where those aircraft and the operator have been approved by the State of Registry or the State of the Operator, as appropriate, to conduct flights in RVSM airspace.

6.2.4.3 Aircraft that have not received RVSM State approval may be cleared to operate in airspace where RVSM may be applied in accordance with policy and procedures established by the State provided that 600 m (2 000 ft) vertical separation is applied.

6.2.5 Radar

Nil.

6.2.6 Reduction in separation minima

(A11 – Chapter 3; P-ATM – Chapter 5)

6.2.6.1 Where, circumstances permitting, separation minima lower than those specified in 6.2.1 and 6.2.2 will be applied in accordance with the PANS-ATM, appropriate information should be published in Aeronautical Information Publications so that users of the airspace are fully aware of the portions of airspace where the reduced separation minima will be applied and of the navigation aids on which those minima are based.

6.2.7 Airspace reservations

Nil.

6.3 MINIMUM FLIGHT LEVEL

(P-ATM – Chapter 4; P-OPS, Volume I)

6.3.1 Establishment

6.3.1.1 The lowest useable flight level shall be calculated from actual QNH, unless the pressure variation is so small that reference to climatological data is acceptable.

Note 1.— The lowest useable flight level will provide a terrain clearance of at least 300 m (1 000 ft).

Note 2.— MET Offices will inform ATS units when, in abnormal conditions, pressure goes below the minimum climatological value, in order that appropriate steps can be taken to cancel temporarily the use of the lowest flight level or levels that would not ensure the minimum terrain clearance.

6.3.1.2 Based on current and anticipated atmospheric pressure distribution, area control centres shall coordinate, when required, the lowest flight level to be used.

6.3.1.3 In determining the transition level, Table 1 should be used when necessary. This table shows the transition level directly as a function of the transition altitude of the aerodrome and of the current QNH altimeter setting value. To determine the transition level for a transition layer of 150 m (500 ft), 300 m (1 000 ft), etc., it will suffice to add the figure 5, 10, etc., to the transition level shown in the appropriate table.

6.3.1.4 The columns on the left show the values that can be assigned to transition altitudes and the top lines indicate the pressure ranges in millibars between which the QNH values of the aerodrome fluctuate. The transition level for a transition layer of at least 0 m (0 ft) appears in each consolidated table in the form indicated below.

Note.— The values for transition altitude, indicated in metres and feet, are given merely for the purpose of identifying typical transition altitudes. Although pairs of values are given in each column, this does not necessarily mean that they are equivalent.

Example explaining the use of the table

Assuming a given QNH value (e.g. 1 012.5 mb) and a given transition altitude (e.g. 1 410 m), the transition level (under the conditions indicated) is FL 50. Should a transition layer of at least 300 m (1 000 ft) be required, then the flight level corresponding to the transition level is 60.

Since the transition altitude for each location has a fixed value, the only line of the table to be used at all times is that which includes this altitude. For example, in the case of an aerodrome with a transition altitude of 1 560 m, (5 200 ft), it could be:

QNH		From 949.1 to 966.5	From 966.6 to 984.2	From 984.3 to 1 002.2	From 1 002.3 to 1 020.5	From 1 020.6 to 1 039.1	From 1 039.2 to 1 057.9
m	ft						
1 560	5 200	70	65	60	55	50	45

Table 1. Method to determine the transition level which will at least coincide with the flight level corresponding to the transition altitude

QNH TA m ft										From	From	From	From	From	From
										942.2 to 959.4	959.5 to 977.1	977.2 to 995.0	995.1 to 1 013.2	1 013.3 to 1 031.6	1 031.7 to 1 050.3
QNH TA m ft										From	From	From	From	From	From
										945.6 to 963.0	963.1 to 980.7	980.8 to 998.6	998.7 to 1 016.8	1 016.9 to 1 035.3	1 035.4 to 1 054.1
QNH TA m ft										From	From	From	From	From	From
										949.1 to 966.5	966.6 to 984.2	984.3 to 1 002.2	1 002.3 to 1 020.5	1 020.6 to 1 039.1	1 039.2 to 1 057.9
QNH TA m ft										From	From	From	From	From	From
										952.6 to 970.0	970.1 to 987.8	987.9 to 1 005.9	1 006.0 to 1 024.2	1 024.3 to 1 042.8	1 042.9 to 1 061.7
QNH TA m ft										From	From	From	From	From	From
										956.1 to 973.5	973.6 to 991.4	991.5 to 1 009.5	1 009.6 to 1 027.9	1 028.0 to 1 046.6	1 046.7 to 1 065.5
450	1 500	480	1 600	510	1 700	540	1 800	570	1 900	35	30	25	20	15	10
600	2 000	630	2 100	660	2 200	690	2 300	720	2 400	40	35	30	25	20	15
750	2 500	780	2 600	810	2 700	840	2 800	870	2 900	45	40	35	30	25	20
900	3 000	930	3 100	960	3 200	990	3 300	1 020	3 400	50	45	40	35	30	25
1 050	3 500	1 080	3 600	1 110	3 700	1 140	3 800	1 170	3 900	55	50	45	40	35	30
1 200	4 000	1 230	4 100	1 260	4 200	1 290	4 300	1 320	4 400	60	55	50	45	40	35
1 350	4 500	1 380	4 600	1 410	4 700	1 440	4 800	1 470	4 900	65	60	55	50	45	40
1 500	5 000	1 530	5 100	1 560	5 200	1 590	5 300	1 620	5 400	70	65	60	55	50	45
1 650	5 500	1 680	5 600	1 710	5 700	1 740	5 800	1 770	5 900	75	70	65	60	55	50
1 800	6 000	1 830	6 100	1 860	6 200	1 890	6 300	1 920	6 400	80	75	70	65	60	55
1 950	6 500	1 980	6 600	2 010	6 700	2 040	6 800	2 070	6 900	85	80	75	70	65	60
2 100	7 000	2 130	7 100	2 160	7 200	2 190	7 300	2 220	7 400	90	85	80	75	70	65

6.4.2 RNAV

Nil.

6.5 AERODROME OPERATIONS

6.5.1 Area of applicability

Nil.

6.5.2 Intersection take-off

Nil.

6.5.3 Multiple line-ups on the same runway

Nil.

6.5.4 Visual departures

Nil.

6.5.5 Visual approaches

Nil.

6.6 RNAV PROCEDURES

6.6.1 General

Nil.

6.6.2 En route

Nil.

6.6.3 Terminal

Nil.

6.6.4 State aircraft

Nil.

6.7 RNP PROCEDURES**6.7.1 General**

Nil.

6.7.2 En route

Nil.

6.7.3 Terminal

Nil.

6.7.4 State aircraft

Nil.

6.8 COMPOSITE PROCEDURES

Nil.

6.9 MNPS PROCEDURES

Nil.

6.10 RVSM PROCEDURES**6.10.1 General****6.10.1.1 Operation of aircraft not approved for RVSM**

6.10.1.1.1 Except for areas where transition areas have been established, aircraft not meeting the requirements of 4.2.2 shall not be allowed to operate in EUR/SAM RVSM airspace.

6.10.1.1.2 Exceptionally, aircraft that have not received RVSM State approval may be cleared to operate in airspace where RVSM may be applied in accordance with policy and procedures established by the State provided that 600 m (2 000 ft) vertical separation is applied.

Note.— Transitions to and from EUR/SAM RVSM airspace will normally take place in the first FIR in EUR/SAM RVSM airspace.

6.10.2 Transition to/from RVSM airspace

(A2 – Appendix 3; A6, Parts I and II, Chapter 7; A11 – Chapter 3; P-ATM – Chapter 5)

6.10.2.1 In order to allow for the transition of flights to and from EUR/SAM RVSM airspace, the ATS authorities responsible for Canarias, Dakar Oceanic, Recife and Sal Oceanic FIRs may establish designated RVSM transition areas. A 300 m (1 000 ft) vertical separation minimum may be applied between RVSM-approved aircraft within these transition areas.

6.10.2.2 An RVSM transition area shall have a vertical extent of FL 290 to FL 410 inclusive, be contained within horizontal dimensions determined by the provider States, be overlapping with or contained within EUR/SAM RVSM airspace and should have direct controller-pilot communications.

6.11 ATS COORDINATION

6.11.1 Between units providing area control services

(A11- Chapter 3; P-ATM – Chapter 10)

6.11.1.1 If a flight should enter an adjacent area, information concerning any revision of the estimate of three minutes or more shall be forwarded to the adjacent area control centre.

6.11.2 RNAV

Nil.

6.11.3 RNP

Nil.

6.11.4 RVSM

Nil.

6.11.5 SSR codes

Nil.

6.12 ATS MESSAGES

6.12.1 Flight plan and departure

(P-ATM – Chapter 11)

6.12.1.1 Filed flight plan messages for flights intending to operate within the NAT Region at a distance of 110 km (60 NM) or less from the northern and southern boundaries of Gander Oceanic and Shanwick Oceanic flight information regions shall be addressed to the area control centres in charge of the NAT flight information regions along the route and, in addition, to the area control centres in charge of the nearest adjacent NAT flight information regions.

6.12.1.2 For flights departing from points within adjacent regions and entering the NAT Region without intermediate stops, filed flight plan messages shall be transmitted to the appropriate area control centres immediately after the flight plan has been submitted.

6.12.2 Arrival

Nil.

6.12.3 Boundary estimates

Nil.

6.12.4 Computer-assisted coordination

Nil.

6.13 FLIGHT INFORMATION SERVICE (FIS)

6.13.1 Automatic terminal information services (ATIS)

Nil.

6.13.2 SIGMETs

(P-ATM – Chapter 9)

6.13.2.1 Transmission of SIGMET information to aircraft shall be at the initiative of the appropriate ATS unit, by the preferred method of directed transmission followed by acknowledgement, or by a general call when the number of aircraft would render the preferred method impracticable.

6.13.2.2 SIGMET information passed to aircraft shall cover a portion of the route up to two hours' flying time ahead of the aircraft.

6.13.3 Special air-reports

Nil.

6.13.4 Amended aerodrome forecasts

(P-ATM – Chapter 9)

6.13.4.1 Amended aerodrome forecasts shall be passed to aircraft within 60 minutes from the aerodrome of destination, unless the information has been made available through other means.

6.13.5 Landing forecasts

(A11 – Chapter 4)

6.13.5.1 The latest landing forecast available to the ATS unit, provided it is no more than one hour old, shall always be transmitted to an aircraft, together with the latest report of routine or special observation, when the aircraft requests the latter information.

6.14 ALERTING SERVICE

Nil.

Chapter 7. SAFETY MONITORING

7.1 STRATEGIC LATERAL OFFSET PROCEDURES (SLOP)

Nil.

7.2 AIRSPACE MONITORING

7.2.1 General

Nil.

7.2.2 RNAV

7.2.2.1 A target level of safety (TLS) of 5×10^{-9} fatal accidents per flight hour per dimension shall be established for route systems operating a 93 km (50 NM) lateral separation minimum. The safety level of such airspace shall be determined by an appropriate safety assessment.

Note.— Detailed guidance material on conducting safety assessments is contained in the Manual on Airspace Planning Methodology for the Determination of Separation Minima (Doc 9689).

7.2.2.2 The following criteria are used in the operational assessment of airspace system safety:

- a) the proportion of the total flight time spent by aircraft 46 km (25 NM) or more off the cleared track shall be less than 7×10^{-4} ; and
- b) the proportion of the total flight time spent by aircraft between 74 km and 110 km (40 NM and 60 NM) off the cleared track shall be less than 4.1×10^{-5} .

7.2.2.3 Adequate monitoring of flight operations shall be conducted to provide data to assist in the assessment of continuing compliance of aircraft with the lateral navigation performance capabilities of RNP 10 and 7.2.2.1. Such data shall include operational errors due to all causes. A safety assessment shall be carried out periodically, based on the data collected, to confirm that the safety level continues to be met.

Note.— Detailed guidance on monitoring is contained in the Air Traffic Services Planning Manual (Doc 9426) and the Manual on Airspace Planning Methodology for the Determination of Separation Minima (Doc 9689).

7.2.3 RNP

Nil.

7.2.4 RVSM

7.2.4.1 Target level of safety (TLS)

7.2.4.1.1 Application of RVSM in the airspace designated in 4.2.1 shall meet a TLS of 5×10^{-9} fatal accidents per aircraft flight hour due to all causes of risk in the vertical dimension.

7.2.4.1.2 Adequate monitoring of flight operations in the EUR/SAM RVSM airspace shall be conducted to assist in the assessment of continuing compliance of aircraft with the height-keeping capabilities in 4.2.2. Monitoring shall include assessment of other sources of risk to ensure that the TLS specified in 7.2.4.1.1 is not exceeded.

Note.— Details of the policy and procedures for monitoring established by the South Atlantic Monitoring Agency (SATMA) are contained in the Guidance Material on the Implementation of a 300 m (1 000 ft) Vertical Separation Minimum (VSM) for Application in the EUR/SAM Corridor.

Chapter 8. AIR TRAFFIC FLOW MANAGEMENT (ATFM)

8.1 PROVISION

Nil.

8.2 APPLICATION

Nil.

8.3 EXEMPTIONS FROM ATFM SLOT ALLOCATION

Nil.

8.4 DEPARTURE SLOT MONITORING

Nil.

8.5 PROMULGATION OF ATFM MEASURES

8.5.1 Strategic ATFM measures

Nil.

8.5.2 Amendments to promulgated strategic ATFM measures

Nil.

8.5.3 ATFM circulars and information

Nil.

8.5.4 Pre-flight information bulletin (PIB)

Nil.

8.5.5 Query procedures

Nil.

Chapter 9. SPECIAL PROCEDURES

9.1 EMERGENCY DESCENT PROCEDURES

9.1.1 Action by the pilot-in-command

Nil.

9.1.2 Action by the ATS unit

Nil.

9.2 CONTINGENCY PROCEDURES INCLUDING TURN-BACKS

Nil.

9.3 AIR-GROUND COMMUNICATION FAILURE

Nil.

9.4 DEGRADATION OR FAILURE OF THE RNAV SYSTEM

9.4.1 Action by the pilot-in-command

Nil.

9.4.2 Action by the ATS unit

Nil.

9.5 LOSS OF VERTICAL NAVIGATION PERFORMANCE REQUIRED FOR RVSM

9.5.1 General

Nil.

9.5.2 Degradation of aircraft equipment – pilot reported

Nil.

9.5.3 Severe turbulence – not forecast

Nil.

9.5.4 Severe turbulence – forecast

Nil.

9.6 EN-ROUTE DIVERSION

Nil.

9.7 INTER-REGION INTERFACE FOR NON-RVSM-APPROVED AIRCRAFT

Nil.

9.8 MANNED BALLOON FLIGHTS

Nil.

Chapter 10. PHRASEOLOGY

10.1 RNAV

Nil.

10.2 RNP

Nil.

10.3 SURVEILLANCE

Nil.

10.4 AERODROME OPERATIONS

Nil.

10.5 ATFM

Nil.

Chapter 11. SEARCH AND RESCUE

11.1 INTERNATIONAL GENERAL AVIATION (IGA)

(A6, Part II – Chapter 6; A6, Part III – Chapter 4)

11.1.1 General aviation aircraft operating over designated areas, land or sea, where search and rescue operations would be difficult, should:

- a) carry appropriate survival equipment; and
 - b) follow the routes or specified procedures if not equipped with two-way radio, except that under special circumstances, the appropriate authority may grant specific exemptions from this requirement.
-

Chapter 12. METEOROLOGY

12.1 AIRCRAFT OBSERVATIONS AND REPORTS

Nil.

Chapter 13. AERONAUTICAL INFORMATION SERVICES

13.1 NOTAM ADDRESSING AND DISTRIBUTION

Nil.

13.2 AERONAUTICAL CHART INFORMATION

13.2.1 Visual procedures

Nil.

CARIBBEAN (CAR) REGIONAL SUPPLEMENTARY PROCEDURES

These procedures are supplementary to the provisions contained in Annex 2, Annex 6 (Part II), Annex 11, PANS-ATM (Doc 4444) and PANS-OPS (Doc 8168). The area of application of the CAR Regional Supplementary Procedures is included on the Index to Application of Supplementary Procedures chart.

TABLE OF CONTENTS

	<i>Chapter</i>	<i>Page</i>
Flight Rules	1	CAR 1-1
Flight Plans	2	CAR 2-1
Communications	3	CAR 3-1
Navigation	4	CAR 4-1
Surveillance	5	CAR 5-1
Air Traffic Services	6	CAR 6-1
Safety Monitoring	7	CAR 7-1
Air Traffic Flow Management	8	CAR 8-1
Special Procedures	9	CAR 9-1
Phraseology	10	CAR 10-1
Search and Rescue	11	CAR 11-1
Meteorology	12	CAR 12-1
Aeronautical Information Services	13	CAR 13-1

Chapter 1. FLIGHT RULES

1.1 VISUAL FLIGHT RULES (VFR)

1.1.1 Special application

Nil.

1.2 INSTRUMENT FLIGHT RULES (IFR)

(A2 – Chapters 2 and 5)

Note.— Annex 2, 2.2, permits a flight to operate using either instrument flight rules or visual flight rules when operated in visual meteorological conditions subject to the limitations listed in Chapter 4 of the Annex. The following indicates certain additional restrictions.

1.2.1 Special application

1.2.1.1 Flights shall be conducted in accordance with instrument flight rules when operated above flight level (FL) 180 within the control areas of Miami Oceanic, Houston Oceanic and San Juan FIRs.

1.2.2 Flight level changes

Nil.

1.3 AIR TRAFFIC ADVISORY SERVICE

Nil.

Chapter 2. FLIGHT PLANS

2.1 CONTENT – GENERAL

(A2 – Chapter 3; P-ATM – Chapter 4 and Appendix 2)

2.1.1 Date of flight

Nil.

2.1.2 Area navigation (RNAV) specifications

Nil.

2.1.3 Required navigation performance (RNP) specifications

2.1.3.1 The letter R shall be inserted in Item 10 (Equipment) of the flight plan to indicate the aircraft meets the RNP type prescribed, has been appropriately approved and can comply with all conditions of that approval.

2.1.4 Minimum navigation performance specifications (MNPS)

Nil.

2.1.5 Reduced vertical separation minimum (RVSM)-approved aircraft

2.1.5.1 The letter W shall be inserted in Item 10 (Equipment) of the flight plan if the aircraft and operator have received RVSM State approval, regardless of the requested flight level. The aircraft registration shall be inserted in Item 18 of the flight plan.

2.1.6 Non-RVSM-approved aircraft

Nil.

2.1.7 Non-RVSM-approved State aircraft

Nil.

2.1.8 Indication of 8.33 kHz channel spacing capability

Nil.

2.1.9 Route

2.1.9.1 Flight plans for flights or portions thereof along oceanic routes not defined by specified reporting points shall be made in accordance with the following:

- a) for flights whose flight path is generally oriented in an east-west direction, the planned track shall normally be defined by significant points formed by the intersection of half or whole degrees of latitude and meridians spaced at intervals of 10 degrees;
- b) for flights whose flight path is generally oriented in a north-south direction, the planned track shall normally be defined by significant points formed by the intersection of whole degrees of longitude with specified parallels of latitude spaced at 5-degree intervals.

2.1.10 Estimated times

Nil.

2.1.11 Mach number

2.1.11.1 For turbo-jet aircraft intending to operate within the control areas of Houston Oceanic, Mexico, Miami Oceanic and San Juan FIRs at or above FL 200 and west of 60°W, the planned true Mach number shall be specified in Item 15 of the flight plan.

2.1.12 Alternative flight level

Nil.

2.1.13 Special handling (STS)

Nil.

2.2 CONTENT – AIR TRAFFIC FLOW MANAGEMENT (ATFM)

2.2.1 Runway visual range (RVR)

Nil.

2.2.2 Flight plan addressing and distribution

Nil.

2.2.3 Slot allocation exemptions

Nil.

2.3 SUBMISSION

2.3.1 General

Nil.

2.3.2 Amendments

Nil.

2.4 REPETITIVE FLIGHT PLANS (RPLs)

Nil.

Chapter 3. COMMUNICATIONS

3.1 AIR-GROUND COMMUNICATIONS AND IN-FLIGHT REPORTING

3.1.1 Communications equipment

Nil.

3.1.2 Continuous listening watch in uncontrolled airspace

(A2 – Chapters 3 and 5; P-ATM – Chapter 4)

3.1.2.1 All VFR flights, and IFR flights outside controlled airspace, shall maintain a listening watch on the frequency where flight information service is provided and report position unless otherwise authorized by the State overflown.

3.1.3 Position reports

(A2 – Chapters 3 and 5; P-ATM – Chapter 4)

Time or place

3.1.3.1 Position reports additional to those required by the general position reporting procedures shall be made at the flight information region boundary when entering or existing Panama FIR.

3.1.3.2 Unless otherwise required by air traffic services, position reports for flights on routes not defined by designated reporting points shall be made at the significant points listed in the flight plan.

3.1.3.3 States should establish reporting points at locations fulfilling operational requirements as set forth in Annex 11, 2.13.1, 2.13.3 and Appendix 2. Except where operational considerations dictate otherwise, those points should be located at intervals of 5 degrees of latitude or longitude (latitude if the route is predominantly north-south, longitude if east-west).

3.1.3.4 Aircraft traversing 10 degrees of latitude or longitude in 1 hour and 20 minutes or less should normally be required to report only at 10-degree intervals. Slower aircraft should normally be required to report at 5-degree intervals.

3.1.3.5 For flights in oceanic areas outside the ATS routes network, the position shall be expressed in terms of latitude and longitude as follows:

a) for flights operating predominantly east-west direction:

- 1) latitude in degrees and minutes; and
- 2) longitude in degrees only;

b) for flights operating predominantly north-south direction:

- 1) latitude in degrees only; and
- 2) longitude in degrees and minutes.

3.1.3.6 Unless air-ground communication is direct with the area control centre concerned, all times shall be expressed in four digits, giving both the hour and minutes, when making position reports within oceanic control areas.

Next position and time over

3.1.3.7 Time over next position shall be expressed in four digits, giving both the hour and minutes, when making position reports within oceanic control areas.

3.1.3.8 If the estimated time over the next significant point is found to be in error by five minutes or more, a revised estimated time over shall be transmitted as soon as possible to the appropriate ATS unit.

Level

3.1.3.9 Aircraft cleared for cruise climb shall report their flight level to the nearest 30 m (100 ft).

Note.— Levels so reported, e.g. 354, may not necessarily be flight levels as described in the PANS-OPS, Volume I, Part III, Section 1.

Transmission

(P-ATM – Chapter 4)

3.1.3.10 Position reports made by aircraft operating within an oceanic control area at a distance of 110 km (60 NM) or less from the common boundary with an adjacent oceanic control area, including aircraft operating on tracks through successive points on such boundary, shall also be made to the area control centre serving the adjacent control area.

3.1.3.11 Responsibility for the transmission of position reports to the additional ATS units specified in 3.1.3.10 may be delegated to the appropriate communications station(s) through local arrangements.

3.1.4 Abbreviated position reports

Nil.

3.1.5 Read-back of VHF channels

Nil.

3.2 MANDATORY CARRIAGE OF 8.33 KHZ CHANNEL SPACING CAPABLE RADIO EQUIPMENT

Nil.

3.3 CONTROLLER-PILOT DATA LINK COMMUNICATIONS (CPDLC)

Nil.

3.4 SATELLITE VOICE COMMUNICATIONS (SATCOM)

Nil.

3.5 AERONAUTICAL MOBILE SERVICE

3.5.1 Selective calling (SELCAL)

Nil.

3.5.2 HF operations

Nil.

3.6 AERONAUTICAL FIXED SERVICE

3.6.1 AFTN rationalization

Nil.

3.7 RADIO CHANNELS/FREQUENCIES

Nil.

Chapter 4. NAVIGATION

4.1 PERFORMANCE-BASED NAVIGATION (PBN)

Note.— As the Caribbean (CAR) Region transitions to PBN as contained in the Performance-based Navigation Manual (Doc 9613), the contents of 4.1 will be amended.*

4.1.1 Area navigation (RNAV) specifications

4.1.1.1 RNAV 10 (RNP 10)

Nil.

4.1.1.2 RNAV 5

Nil.

4.1.1.3 RNAV 2

Nil.

4.1.1.4 RNAV 1

Nil.

4.1.1.5 Pre-PBN navigation specifications

4.1.1.5.1 Minimum navigation performance specifications (MNPS)

Area of applicability

4.1.1.5.1.1 For flights in transit to or from the NAT MNPS airspace, while operating in the control area of the San Juan FIR, a lateral separation minimum of 110 km (60 NM) may be applied.

Means of compliance

4.1.1.5.1.2 Aircraft must meet the NAT MNPS specifications.

Note.— The NAT MNPS area and specifications are set forth in the NAT SUPPS, Chapter 4.

* In preparation.

4.1.2 Required navigation performance (RNP) specifications

4.1.2.1 RNP 4

Nil.

4.1.2.2 Basic RNP 1

Nil.

4.1.2.3 Advanced RNP 1

Nil.

4.2 REDUCED VERTICAL SEPARATION MINIMUM (RVSM)

Area of applicability

4.2.1 A minimum vertical separation of 300 m (1 000 ft) shall be applied between FL 290 and FL 410 inclusive in the following FIRs:

Barranquilla, Central America, Curacao, Georgetown, Havana, Houston Oceanic, Kingston, Maiquetia, Mazatlan Oceanic, Mexico, Miami Oceanic, Panama, Paramaribo, Piarco, Port-au-Prince, Rochambeau, Santo Domingo and San Juan.

Note.— The volume of airspace referred to as “CAR/SAM RVSM airspace” includes the FIRs listed in the area of applicability of vertical separation in the CAR and SAM Regional Supplementary Procedures.

Means of compliance

(A2 – Chapter 5 and Appendix 3; A6, Part I – Chapters 3, 4 and 7;
A6, Part II – Chapters 3 and 7; A8, Part IIIA – Chapter 8; A11 – Chapter 2)

4.2.2 Operators intending to conduct flights within the CAR Region where RVSM is applied shall require an RVSM approval either from the State of Registry or the State of the Operator. The State of Registry or the State of the Operator, as appropriate, should verify that the height-keeping performance capability of approved aircraft meets the requirements specified in Annex 6, Parts I and II.

Note.— Guidance material regarding the initial achievement and continued maintenance of the height-keeping performance in 4.2.2. is contained in the Guidance Material on the Implementation of a 300 m (1 000 ft) Vertical Separation Minimum (VSM) for Application in the CAR/SAM Regions.

Chapter 5. SURVEILLANCE

(P-ATM – Chapter 8; P-OPS, Vol. I, Part III)

5.1 SECONDARY SURVEILLANCE RADAR (SSR)

5.1.1 Carriage of pressure-altitude reporting SSR transponders

Nil.

5.1.2 Code allocation methodology

Nil.

5.1.3 Assignment of SSR codes

5.1.3.1 All aircraft in international flight under instrument flight rules shall be assigned an appropriate SSR code by ATS units in accordance with the *Air Navigation Plan — Caribbean and South American Regions*, Volume II – *FASID* (Doc 8733), Part V, Appendix B, SSR Code Allocation Plan (CAP). An assigned four-digit code shall be used for as long as possible during a flight in the CAR/SAM Regions.

5.1.4 Operation of pressure-altitude reporting SSR transponders

Nil.

5.1.5 Monitoring of SSR-derived information

Nil.

5.2 SSR MODE S

5.2.1 Carriage and operation of SSR Mode S

Nil.

5.2.2 Transition between Mode A/C and Mode S

Nil.

5.3 AIRBORNE COLLISION AVOIDANCE SYSTEMS (ACAS)

5.3.1 Carriage and operation of ACAS II

Nil.

5.4 AUTOMATIC DEPENDENT SURVEILLANCE – CONTRACT (ADS-C)

Nil.

5.5 AUTOMATIC DEPENDENT SURVEILLANCE – BROADCAST (ADS-B)

Nil.

Chapter 6. AIR TRAFFIC SERVICES

6.1 AIR TRAFFIC CONTROL (ATC) CLEARANCES

(A11 – Chapter 3; P-ATM – Chapter 4)

6.1.1 Content

Nil.

6.1.2 Adherence

Nil.

6.2 SEPARATION

6.2.1 Lateral

(A11 – Attachment B; P-ATM – Chapters 5 and 15)

6.2.1.1 Minimum lateral separation shall be:

- a) 110 km (60 NM) between aircraft which meet the North Atlantic minimum navigation performance specifications (MNPS) which, while operating in the control area of San Juan FIR, are in transit to or from the NAT MNPS airspace;

Note.— The NAT MNPS area is set forth in NAT SUPPS, Chapter 4.

- b) 167 km (90 NM) between aircraft operating between the United States, Canada or Bermuda and points in the CAR Region in the control areas of San Juan and New York Oceanic FIRs and the Atlantic portion of the Miami Oceanic control area;
- c) 185 km (100 NM) west of 60°W (only in oceanic areas) between aircraft not covered in a) and b), and between aircraft in the control area of Piarco FIR west of 55°W; and
- d) 223 km (120 NM) between aircraft operating east of 60°W in the New York Oceanic FIR, and between aircraft in the control area of Piarco FIR east of 55°W;

except the lower minima as detailed in 5.4.1.2 of the PANS-ATM may be applied, or further reduced in accordance with 5.11 of the PANS-ATM, where the conditions specified in the relevant PANS-ATM provisions are met (see 6.2.5).

6.2.2 Longitudinal (P-ATM – Chapter 5)

6.2.2.1 Between turbo-jet aircraft at or above FL 280 on oceanic published routes operating in the West Atlantic Route System (WATRS), or at or above FL 280 operating west of 60°W when transitioning to or from the WATRS area, the longitudinal separation shall be in accordance with the PANS-ATM, 5.4.2.4.

Note.— The WATRS area is defined beginning at a point 2700N 7700W direct to 2000N 6700W direct to 1800N 6200W direct to 1800N 6000W direct to 3830N 6000W direct to 3830N 6915W, thence counterclockwise along the New York Oceanic control area/FIR boundary to the Miami Oceanic control area/FIR boundary, thence southbound along the Miami Oceanic control area/FIR boundary to the point of beginning.

6.2.2.2 Between turbo-jet aircraft operating at or above FL 200 and west of 60°W within the Houston Oceanic, applicable parts of Mexico FIR (Merida and Monterrey CTAs), Miami Oceanic and San Juan CTA/FIR control areas, the longitudinal separation with Mach number technique applied in accordance with the relevant provisions of the PANS-ATM, 5.4.2.4, shall be:

- a) 15 minutes; or
- b) this separation may be reduced to:
 - 1) 10 minutes at the entry point into oceanic controlled airspace, if the preceding aircraft is maintaining a speed of at least Mach 0.03 greater than that of the following aircraft; or
 - 2) 5 minutes at the entry point into oceanic controlled airspace, if the preceding aircraft is maintaining a speed of at least Mach 0.06 greater than that of the following aircraft.

6.2.2.3 Between aircraft operating below FL 200 west of 55°W and between aircraft operating at all levels east of 55°W within the San Juan and Piarco FIRs and the Paramaribo and Rochambeau upper flight information regions (UIRs), 20-minute longitudinal separation shall be applied. This minimum may also be applied if the aircraft have not reported over the same reporting point when it is possible to ensure, by radar or other means approved by the State, that the appropriate time interval will exist at the common point from which they follow either the same track or continuously diverging tracks.

6.2.2.4 Between turbo-jet aircraft meeting the MNPS and operating in the New York Oceanic control area wholly or partly in MNPS airspace, the minimum longitudinal separation with Mach number technique shall be in accordance with the PANS-ATM, 5.4.2.4. In cases where the aircraft concerned have reported over a common point and follow continuously diverging tracks until some other form of separation is provided:

- a) at least 10-minute longitudinal separation shall exist at the point where the tracks diverge; or
- b) at least 5-minute longitudinal separation will exist where lateral separation is achieved; and
- c) lateral separation will be achieved at or before the next significant point (normally 10 degrees of longitude along track(s)) or, if not, within 90 minutes of the time the second aircraft passes the common point or within 1 112 km (600 NM) of the common point, whichever is estimated to occur first.

6.2.2.5 For turbo-jet aircraft meeting the MNPS and operating in the New York Oceanic control area wholly or partly in MNPS airspace but not meeting the requirements of 6.2.2.4, 15-minute longitudinal separation shall be applied.

6.2.2.6 Between aircraft operating outside MNPS airspace in the New York Oceanic control area the minimum longitudinal separation shall be:

- a) 15 minutes between turbo-jet aircraft, provided the Mach number technique is applied and, whether in level, climbing or descending flight:
 - 1) the aircraft concerned have reported over a common point and follow the same track or continuously diverging tracks until some other form of separation is provided; or
 - 2) if the aircraft have not reported over a common point, it is possible to ensure, by radar or other means approved by the State, that the appropriate time interval will exist at the common point from which they follow either the same track or continuously diverging tracks;
- b) 10 or 5 minutes only when it is possible to ensure, by radar or other means approved by the State, that the required time interval exists and will exist at the common point, provided the preceding aircraft is maintaining a greater Mach number than the following aircraft in accordance with the following:
 - 1) 10 minutes if the preceding aircraft is maintaining a speed of at least Mach 0.03 greater than that of the following aircraft; and
 - 2) 5 minutes if the preceding aircraft is maintaining a speed of at least Mach 0.06 greater than that of the following aircraft;
- c) 20 minutes between turbo-jet aircraft not covered by a) and b);
- d) 20 minutes between other than turbo-jet aircraft operating along routes extending between the United States, Canada or Bermuda and Caribbean terminals, or between the United States or Canada and Bermuda; and
- e) 30 minutes between other than turbo-jet aircraft not covered in d).

6.2.3 Composite

Nil.

6.2.4 Vertical

6.2.4.1 An RVSM of 300 m (1 000 ft) shall be applied between FL 290 and FL 410 inclusive within the FIRs specified in 4.2.1.

6.2.4.2 The minimum separation of 6.2.4.1 shall only be applied between aircraft where those aircraft and the operator have been approved by the State of Registry or the State of the Operator, as appropriate, to conduct flights in RVSM airspace.

6.2.4.3 Aircraft that have not received RVSM State approval may be cleared to operate in airspace where RVSM may be applied in accordance with policy and procedures established by the State provided that 600 m (2 000 ft) vertical separation is applied.

6.2.4.4 In order to allow for the transition of flights to and from RVSM airspace, the ATS authorities responsible for the FIRs involved may establish designated RVSM transition areas. A 300 m (1 000 ft) vertical separation minimum can be applied between RVSM-approved aircraft within these transition areas.

6.2.4.5 An RVSM transition area shall have a vertical extent of FL 290 to FL 410 inclusive, shall be contained within horizontal dimensions determined by the provider States, shall be overlapping with or contained within the CAR/SAM RVSM airspace and shall have direct pilot-controller communications.

6.2.5 Radar

Nil.

6.2.6 Reduction in separation minima

(A11 – Chapter 3; P-ATM – Chapter 5)

6.2.6.1 Where, circumstances permitting, separation minima lower than those specified in 6.2.1 and 6.2.2 will be applied in accordance with the PANS-ATM, appropriate information should be published in AIPs so that users of the airspace are fully aware of the portions of airspace where the reduced separation minima will be applied and of the navigation aids on which those minima are based.

6.2.7 Airspace reservations

Nil.

6.3 MINIMUM FLIGHT LEVEL

6.3.1 Establishment

6.3.1.1 The lowest useable flight level for flights en-route may be calculated with reference to climatological data.

6.4 ATS ROUTES

6.4.1 Track systems

Nil.

6.4.2 RNAV

Nil.

6.5 AERODROME OPERATIONS

6.5.1 Area of applicability

Nil.

6.5.2 Intersection take-off

Nil.

6.5.3 Multiple line-ups on the same runway

Nil.

6.5.4 Visual departures

Nil.

6.5.5 Visual approaches

Nil.

6.6 RNAV PROCEDURES

6.6.1 General

Nil.

6.6.2 En route

Nil.

6.6.3 Terminal

Nil.

6.6.4 State aircraft

Nil.

6.7 RNP PROCEDURES

6.7.1 General

Nil.

6.7.2 En route

Nil.

6.7.3 Terminal

Nil.

6.7.4 State aircraft

Nil.

6.8 COMPOSITE PROCEDURES

Nil.

6.9 MNPS PROCEDURES

Nil.

6.10 RVSM PROCEDURES**6.10.1 General****6.10.1.1 Operation of aircraft not approved for RVSM**

6.10.1.1.1 Except for areas where transition areas have been established, aircraft not approved for RVSM operations in accordance with the requirements of 4.2.2 shall not be allowed to operate in CAR/SAM RVSM airspace.

6.10.1.1.2 Exceptionally, aircraft that have not received RVSM State approval may be cleared to operate in airspace where RVSM may be applied in accordance with policy and procedures established by the State provided that 600 m (2 000 ft) vertical separation is applied.

6.10.2 Transition to/from RVSM airspace

Nil.

6.11 ATS COORDINATION

6.11.1 Between units providing area control services

(A11 – Chapter 3; P-ATM – Chapter 10)

6.11.1.1 If a flight should enter an adjacent area, information concerning any revision of the estimate of three minutes or more shall be forwarded to the adjacent area control centre.

6.11.2 RNAV

Nil.

6.11.3 RNP

Nil.

6.11.4 RVSM

Nil.

6.11.5 SSR codes

Nil.

6.12 ATS MESSAGES

6.12.1 Flight plan and departure

(P-ATM – Chapter 11)

6.12.1.1 Filed flight plan messages for flights intending to operate within the NAT Region at a distance of 110 km (60 NM) or less from the northern and southern boundaries of Gander Oceanic and Shanwick Oceanic flight information regions shall be addressed to the area control centres in charge of the NAT flight information regions along the route and, in addition, to the area control centres in charge of the nearest adjacent NAT flight information regions.

6.12.1.2 For flights departing from points within adjacent regions and entering the NAT Region without intermediate stops, filed flight plan messages shall be transmitted to the appropriate area control centres immediately after the flight plan has been submitted.

6.12.2 Arrival

Nil.

6.12.3 Boundary estimates

Nil.

6.12.4 Computer-assisted coordination

Nil.

6.13 FLIGHT INFORMATION SERVICE (FIS)**6.13.1 Automatic terminal information services (ATIS)**

Nil.

6.13.2 SIGMETs

(P-ATM – Chapter 9)

6.13.2.1 Transmission of SIGMET information to aircraft shall be at the initiative of the appropriate ATS unit, by the preferred method of directed transmission followed by acknowledgement, or by a general call when the number of aircraft would render the preferred method impracticable.

6.13.2.2 SIGMET information passed to aircraft shall cover a portion of the route up to two hours' flying time ahead of the aircraft.

6.13.3 Special air-reports

Nil.

6.13.4 Amended aerodrome forecasts

(P-ATM – Chapter 9)

6.13.4.1 Amended aerodrome forecasts shall be passed to aircraft within 60 minutes from the aerodrome of destination, unless the information has been made available through other means.

6.13.5 Landing forecasts

Nil.

6.14 ALERTING SERVICE

Nil.

Chapter 7. SAFETY MONITORING

7.1 STRATEGIC LATERAL OFFSET PROCEDURES (SLOP)

Nil.

7.2 AIRSPACE MONITORING

7.2.1 General

Nil.

7.2.2 RNAV

Nil.

7.2.3 RNP

Nil.

7.2.4 RVSM

7.2.4.1 Target level of safety (TLS)

7.2.4.nm1.1 Application of RVSM in the airspace designated in 4.2.1 shall meet a TLS of 5×10^{-9} fatal accidents per aircraft flight hour due to all causes of risk in the vertical dimension.

7.2.4.1.2 Adequate monitoring of flight operations in the CAR/SAM RVSM airspace shall be conducted to assist in the assessment of continuing compliance of aircraft with the height-keeping capabilities in 4.2.2. Monitoring shall include assessment of other sources of risk to ensure that the TLS specified in 7.2.4.1.1 is not exceeded.

Note.— Details of the policy and procedures for monitoring established by the CAR/SAM Monitoring Agency (CARSAMMA) are contained in the Guidance Material on the Implementation of a 300 m (1 000 ft) Vertical Separation Minimum (VSM) for Application in the CAR/SAM Regions.

Chapter 8. AIR TRAFFIC FLOW MANAGEMENT (ATFM)

8.1 PROVISION

Nil.

8.2 APPLICATION

Nil.

8.3 EXEMPTIONS FROM ATFM SLOT ALLOCATION

Nil.

8.4 DEPARTURE SLOT MONITORING

Nil.

8.5 PROMULGATION OF ATFM MEASURES

8.5.1 Strategic ATFM measures

Nil.

8.5.2 Amendments to promulgated strategic ATFM measures

Nil.

8.5.3 ATFM circulars and information

Nil.

8.5.4 Pre-flight information bulletin (PIB)

Nil.

8.5.5 Query procedures

Nil.

Chapter 9. SPECIAL PROCEDURES

9.1 EMERGENCY DESCENT PROCEDURES

9.1.1 Action by the pilot-in-command

Nil.

9.1.2 Action by the ATS unit

Nil.

9.2 CONTINGENCY PROCEDURES INCLUDING TURN-BACKS

Nil.

9.3 AIR-GROUND COMMUNICATION FAILURE

Nil.

9.4 DEGRADATION OR FAILURE OF THE RNAV SYSTEM

9.4.1 Action by the pilot-in-command

Nil.

9.4.2 ACTION BY THE ATS UNIT

Nil.

9.5 LOSS OF VERTICAL NAVIGATION PERFORMANCE REQUIRED FOR RVSM

9.5.1 General

Nil.

9.5.2 Degradation of aircraft equipment — pilot reported

Nil.

9.5.3 Severe turbulence — not forecast

Nil.

9.5.4 Severe turbulence — forecast

Nil.

9.6 EN-ROUTE DIVERSION

Nil.

9.7 INTER-REGION INTERFACE FOR NON-RVSM-APPROVED AIRCRAFT

Nil.

9.8 MANNED BALLOON FLIGHTS

Nil.

Chapter 10. PHRASEOLOGY

10.1 RNAV

Nil.

10.2 RNP

Nil.

10.3 SURVEILLANCE

Nil.

10.4 AERODROME OPERATIONS

Nil.

10.5 ATFM

Nil.

Chapter 11. SEARCH AND RESCUE

11.1 INTERNATIONAL GENERAL AVIATION (IGA)

(A6, Part II – Chapter 6; A6, Part III – Chapter 4)

11.1.1 General aviation aircraft operating over designated areas, land or sea, where search and rescue operations would be difficult, should:

- a) carry appropriate survival equipment; and
 - b) follow the routes or specified procedures if not equipped with two-way radio, except that under special circumstances, the appropriate authority may grant specific exemptions from this requirement.
-

Chapter 12. METEOROLOGY

12.1 AIRCRAFT OBSERVATIONS AND REPORTS

Nil.

Chapter 13. AERONAUTICAL INFORMATION SERVICES

13.1 NOTAM ADDRESSING AND DISTRIBUTION

Nil.

13.2 AERONAUTICAL CHART INFORMATION

13.2.1 Visual procedures

Nil.

EUROPEAN (EUR) REGIONAL SUPPLEMENTARY PROCEDURES

These procedures are supplementary to the provisions contained in Annex 2, Annex 6 (Parts I and II), Annex 10 (Volumes IV and V), Annex 11, Annex 15, PANS-ATM (Doc 4444) and PANS-OPS (Doc 8168). The area of application of the EUR Regional Supplementary Procedures is included on the Index to Application of Supplementary Procedures chart.

TABLE OF CONTENTS

	<i>Chapter</i>	<i>Page</i>
Flight Rules	1	EUR 1-1
Flight Plans	2	EUR 2-1
Communications	3	EUR 3-1
Navigation	4	EUR 4-1
Surveillance	5	EUR 5-1
Air Traffic Services	6	EUR 6-1
Safety Monitoring	7	EUR 7-1
Air Traffic Flow Management	8	EUR 8-1
Special Procedures	9	EUR 9-1
Phraseology	10	EUR 10-1
Search and Rescue	11	EUR 11-1
Meteorology	12	EUR 12-1
Aeronautical Information Services	13	EUR 13-1

Chapter 1. FLIGHT RULES

1.1 VISUAL FLIGHT RULES (VFR)

1.1.1 Special application

Nil.

1.2 INSTRUMENT FLIGHT RULES (IFR)

(A2 – Chapters 2 and 5)

Note.— Annex 2, 2.2, permits a flight to operate using either instrument flight rules or visual flight rules when operated in visual meteorological conditions subject to the limitations listed in Chapter 4 of the Annex. The following indicates certain additional restrictions.

1.2.1 Special application

1.2.1.1 Flights shall be conducted in accordance with instrument flight rules when operated above flight level (FL) 150 within the Amman, Beirut, Cairo, Damascus, Nicosia and Tel Aviv flight information regions (FIR).

1.2.1.2 Flights shall be conducted in accordance with instrument flight rules when operated within or above the EUR RVSM airspace as specified in 4.2.1.

1.2.2 Flight level changes

Nil.

1.3 AIR TRAFFIC ADVISORY SERVICE

(P-ATM – Chapter 9)

Note.— The circumstances under which it is compulsory to obtain air traffic advisory services are listed below.

1.3.1 All IFR flights shall comply with the procedures for air traffic advisory service when operating in advisory airspace within the Amman, Beirut, Cairo, Damascus and Tel Aviv flight information regions.

Chapter 2. FLIGHT PLANS

2.1 CONTENT – GENERAL

(A2 – Chapter 3; P-ATM – Chapter 11)

2.1.1 Date of flight

Note.— The PANS-ATM, 11.4.2.2.2.5, states that “if a flight plan is filed more than 24 hours in advance of the estimated off-block time of the flight to which it refers, that flight plan shall be held in abeyance until at most 24 hours before the flight begins so as to avoid the need for the insertion of a date group into that flight plan”. The following specifies details regarding the insertion of a date group into the flight plan.

2.1.1.1 If a flight plan for a flight conducted wholly in the EUR Region is filed more than 24 hours in advance of the estimated off-block time (EOBT), it is mandatory to provide the date of the flight (DOF). If the flight plan is filed less than 24 hours in advance of the EOBT, the date of the flight may be optionally indicated. This information will be inserted in Item 18 of the flight plan as a 3-letter indicator (DOF) followed by an oblique stroke and date of flight in a 6-figure group format:

DOF/YYMMDD (YY = year; MM = month; DD = day)

2.1.2 Area navigation (RNAV) specifications

2.1.2.1 Operators of aircraft approved for basic area navigation (B-RNAV) operations, as set out in 4.1.1.5.2, shall insert the designator “R” in Item 10 of the flight plan.

2.1.2.2 Operators of aircraft approved for precision area navigation (P-RNAV) operations, as set out in 4.1.1.5.2, shall, in addition to the designator “R”, also insert the designator “P” in Item 10 of the flight plan.

2.1.2.3 Operators of State aircraft not equipped with RNAV shall not insert the designators “S” or “R” or “P” in Item 10 of the flight plan. Instead, STS/NO RNAV shall be inserted in Item 18 of the flight plan.

2.1.2.4 Where a failure or degradation results in the aircraft being unable to meet the P-RNAV functionality and accuracy requirements of 4.1.1.5.2.4 before departure, the operator of the aircraft shall not insert the designator “P” in Item 10 of the flight plan. Subsequently, for a flight for which a flight plan has been submitted, an appropriate new flight plan shall be submitted and the old flight plan cancelled. For a flight operating based on a repetitive flight plan (RPL), the RPL shall be cancelled and an appropriate new flight plan shall be submitted.

2.1.2.5 In addition, where a failure or degradation results in the aircraft being unable to meet the B-RNAV functionality and accuracy requirements of 4.1.1.5.2.6 before departure, the operator of the aircraft shall not insert the designators “S” or “R” or “P” in Item 10 of the flight plan. Since such flights require special handling by ATC, Item 18 of the flight plan shall contain STS/NO RNAVINOP. Subsequently, for a flight for which a flight plan has been submitted, an appropriate new flight plan shall be submitted and the old flight plan cancelled. For a flight operating based on an RPL, the RPL shall be cancelled and an appropriate new flight plan shall be submitted.

2.1.3 Required navigation performance (RNP) specifications

Nil.

2.1.4 Minimum navigation performance specifications (MNPS)

Nil.

2.1.5 Reduced vertical separation minimum (RVSM)-approved aircraft

2.1.5.1 Operators of RVSM-approved aircraft shall indicate the approval status by inserting the letter W in Item 10 of the flight plan, regardless of the requested flight level.

2.1.5.2 Operators of RVSM-approved aircraft shall also include the letter W in Item Q of the RPL, regardless of the requested flight level. If a change of aircraft operated in accordance with an RPL results in a modification of the RVSM approval status as stated in Item Q, a modification message (CHG) shall be submitted by the operator.

2.1.5.3 Operators of formation flights of State aircraft shall not insert the letter W in Item 10 of the flight plan, regardless of the RVSM approval status of the aircraft concerned. Operators of formation flights of State aircraft intending to operate within the EUR RVSM airspace as general air traffic (GAT) shall include STS/NONRVSM in Item 18 of the flight plan.

Note.— The area of applicability of EUR RVSM airspace is specified in 4.2.1 and 4.2.2.

2.1.5.4 Operators of RVSM-approved aircraft and non-RVSM-approved State aircraft intending to operate from non-RVSM airspace to adjacent RVSM airspace shall include, in Item 15 of the flight plan, the entry point at the lateral limits of RVSM airspace and the requested flight level for that portion of the route commencing at the entry point.

Note.— Refer to 6.10.2.2 for related air traffic control (ATC) requirements.

2.1.5.5 Operators of RVSM-approved aircraft and non-RVSM-approved State aircraft intending to operate from RVSM airspace to adjacent non-RVSM airspace shall include, in Item 15 of the flight plan, the exit point at the lateral limit of RVSM airspace and the requested flight level for that portion of the route commencing at the exit point.

Note.— Refer to 6.10.2.3 for related ATC requirements.

2.1.6 Non-RVSM-approved aircraft

Note.— The flight planning requirements for non-RVSM-approved State aircraft are specified in 2.1.7.

2.1.6.1 Except for operations within RVSM transition airspace as defined in 6.10.2.1.1 and within airspace designated in accordance with 9.7.1.1, operators of non-RVSM-approved aircraft shall flight plan to operate outside RVSM airspace.

Note.— Refer to 6.10.1.1 regarding ATC clearance into RVSM airspace.

2.1.6.2 Operators of non-RVSM-approved aircraft intending to operate from a departure aerodrome outside the lateral limits of RVSM airspace at a cruising level of FL 290 or above to a destination aerodrome within the lateral limits of RVSM airspace shall include the following in Item 15 of the flight plan:

- a) the entry point at the lateral limits of RVSM airspace; and

- b) the requested flight level below FL 290 for that portion of the route commencing at the entry point.

Note.— Refer to 6.10.2.4.1 for related ATC requirements.

2.1.6.3 Operators of non-RVSM-approved aircraft intending to operate from a departure aerodrome to a destination aerodrome, both of which are within the lateral limits of RVSM airspace, shall include, in Item 15 of the flight plan, a requested cruising level below FL 290.

Note.— Refer to 6.10.2.4.2 for related ATC requirements.

2.1.6.4 Operators of non-RVSM-approved aircraft intending to operate from a departure aerodrome within the lateral limits of RVSM airspace to a destination aerodrome outside the lateral limits of RVSM airspace at a cruising level of FL 290 or above shall include the following in Item 15 of the flight plan:

- a) the requested flight level below FL 290 for that portion of the route within the lateral limits of RVSM airspace; and
- b) the exit point at the lateral limits of RVSM airspace and the requested flight level for that portion of the route commencing at the exit point.

Note.— Refer to 6.10.2.4.3 for related ATC requirements.

2.1.6.5 Operators of non-RVSM-approved aircraft intending to operate at a cruising level between FL 290 to FL 410 inclusive from a departure aerodrome to a destination aerodrome, both of which are outside the lateral limits of RVSM airspace, with a portion of the route within the lateral limits of RVSM airspace, shall include the following in Item 15 of the flight plan:

- a) the entry point at the lateral limits of RVSM airspace and the requested flight level below FL 290 or above FL 410 for that portion of the route commencing at the entry point; and
- b) the exit point at the lateral limits of RVSM airspace and the requested flight level for that portion of the route commencing at the exit point.

Note.— Refer to 6.10.2.4.4 for related ATC requirements.

2.1.7 Non-RVSM-approved State aircraft

2.1.7.1 Operators of non-RVSM-approved State aircraft with a requested cruising level of FL 290 or above shall insert STS/NONRVSM in Item 18 of the flight plan.

Note.— Refer to 2.1.6.4 and 2.1.6.5 for flight planning provisions related to operating to/from RVSM airspace from/to adjacent non-RVSM airspace.

2.1.8 Indication of 8.33 kHz channel spacing capability

2.1.8.1 For flights conducted wholly or partly in the volume of airspace where the carriage of 8.33 kHz channel spacing radio equipment is mandatory, as specified in 3.2.1, in addition to the letter S and/or any other letters, as appropriate, the letter Y shall be inserted in Item 10 of the flight plan for aircraft equipped with 8.33 kHz channel spacing capable radio equipment, or the indicator STS/EXM833 shall be included in Item 18 for aircraft not equipped but which have been granted exemption from the mandatory carriage requirement. Aircraft normally capable of operating above FL 195 but planning to fly below this level shall include the letter Y as specified above.

Note.— In the case of “STS/EXM833”, a list of exemptions will have to be published in the States’ AIPs. The absence of the letter Y in Item 10 will be taken as a lack of 8.33 kHz capable equipment.

2.1.8.2 In case of a change in the 8.33 kHz capability status for a flight planned to operate in the area specified in 3.2.1, a modification message shall be sent with the appropriate indicator inserted in the relevant Item.

2.1.9 Route

Nil.

2.1.10 Estimated times

Nil.

2.1.11 Mach number

Nil.

2.1.12 Alternative flight level

Nil.

2.1.13 Special handling (STS)

Nil.

2.2 CONTENT – AIR TRAFFIC FLOW MANAGEMENT (ATFM)

2.2.1 Runway visual range (RVR)

2.2.1.1 When RVR information is included in Item 18 of the flight plan (“RVR/nnn”) to indicate the minimum RVR requirement of the flight, it may be used for air traffic flow management (ATFM) purposes.

2.2.2 Flight plan addressing and distribution (P-ATM – Chapter 11)

2.2.2.1 Flight plans and associated messages for all IFR flights, including the IFR portions of mixed IFR/VFR flights, entering, over flying or departing the IFPS zone (IFPZ), shall be addressed only to the two integrated initial flight plan processing system (IFPS) addresses for that portion of the flight within the IFPZ. The IFPS addresses to be included in flight plans and associated messages submitted by operators that intend to fly into or through the IFPZ are as follows:

Network	IFPS Unit Addresses	
	IFPU1 Haren, Belgium	IFPU2 Brétigny, France
AFTN	EBBDZMFP	LFPYZMFP
SITA	BRUEP7X	PAREP7X

2.2.2.2 IFPS will ensure distribution of the accepted flight plan to all relevant ATS units within their area of responsibility. Flight plan message originators filing to IFPS are responsible for ensuring that the flight plan and any modifications made thereto are addressed to all the relevant ATS units outside the IFPZ. In order to ensure consistency between the flight plan data distributed within the IFPZ and that distributed outside the IFPZ, the Central Flow Management Unit (CFMU) has established a “re-addressing function”. The “re-addressing function” is intended primarily for flights originating within the IFPZ and proceeding outside the IFPZ.

Note.— Detailed procedures and information applicable to flight plan addressing and distribution are contained in the EUROCONTROL “Basic CFMU Handbook”.

2.2.3 Slot allocation exemptions

2.2.3.1 The following flights are exempted from ATFM slot allocations:

- a) flights carrying Head of State or equivalent status [“ST/HEAD”]; and
- b) flights conducting search and rescue operations [“STS/SAR”].

2.3 SUBMISSION

(A2 – Chapter 3; P-ATM – Chapters 3 and 4)

2.3.1 General

2.3.1.1 A centralized flight planning processing and distribution service has been established under the authority of the EUROCONTROL CFMU. The service is provided through the IFPS and covers part of the ICAO EUR Region known as the IFPZ.

2.3.1.2 For all IFR flights, including the IFR portions of mixed IFR/VFR flights, entering, overflying or departing the IFPZ, a flight plan shall be submitted to IFPS either directly or via the Air Traffic Services Reporting Office (ARO) serving the aerodrome of departure.

Note 1.— The area of applicability and detailed procedures pertaining to the IFPZ are contained in the EUROCONTROL “Basic CFMU Handbook”.

Note 2.— See 2.2.2 for information concerning flight plan addressing and distribution.

2.3.1.3 Flight plans for flights which may be subject to ATFM shall be submitted at least 3 hours before the EOBT.

2.3.2 Amendments

(P-ATM – Chapter 11)

2.3.2.1 Any changes to the EOBT of more than 15 minutes for any IFR flight within the IFPZ shall be communicated to the IFPS.

2.3.2.2 When an individual flight plan (FPL) or a repetitive flight plan (RPL) has been filed but it is decided, within 4 hours of EOBT, to use an alternative routing between the same aerodromes of departure and destination, either a modification message (CHG) may be sent or alternatively:

- a) a cancellation message (CNL) with priority “DD” shall be sent to IFPS;
- b) not less than 5 minutes after sending the CNL message, a replacement flight plan (RFP) in the form of an FPL with identical call sign shall be transmitted;
- c) the RFP shall contain, as the first element of Item 18, the indication “RFP/Qn”, where RFP signifies “Replacement Flight Plan” and “n” is “1” for the first replacement, “2” for the second replacement, and so on; and
- d) the last RFP shall be filed at least 30 minutes before EOBT.

Note.— The submission of a replacement flight plan is normally accepted as fulfilling a State’s requirement for advance notification of flight (diplomatic clearance).

2.4 REPETITIVE FLIGHT PLANS (RPLs)

(P-ATM – Chapter 16 and Appendix 2)

Note.— Detailed provisions for the handling of RPLs within the IFPZ are specified in the EUROCONTROL “Basic CFMU Handbook”.

2.4.1 In order to avoid a disproportionate workload on ATS units, RPLs will not be accepted for any flight conducted on 25 December. On this day, individual flight plans shall be filed for all flights.

2.4.2 All operators filing RPLs shall include, in Item Q of the RPL, all equipment and capability information in conformity with Item 10 of the flight plan. This includes appropriate indicators/designators as specified in 2.1.2.1, 2.1.2.2, 2.1.5.1 and 2.1.8.1.

2.4.3 When there is a change of equipment or capability for a flight which is subject to an RPL, a modification message (CHG) for the day of operation shall be sent not earlier than 20 hours before the estimated EOBT.

2.4.4 Similarly, other changes, delays, or cancellations for the day of operation shall be sent not earlier than 20 hours before the EOBT.

Chapter 3. COMMUNICATIONS

3.1 AIR-GROUND COMMUNICATIONS AND IN-FLIGHT REPORTING

(A2 – Chapters 3 and 5; P-ATM – Chapter 4)

Note.— Annex 2, 3.6.5.1 and 5.3.3, require controlled flights and certain IFR flights outside controlled airspace to maintain a continuous listening watch on the appropriate radio channel. The PANS-ATM, 4.11.2, allows the appropriate ATS authority to limit the elements required in position reports in specified circumstances. The following expands such requirements and specifies additional details regarding the transmission and content of in-flight reports.

3.1.1 Communications equipment

Nil.

3.1.2 Continuous listening watch in uncontrolled airspace

3.1.2.1 Aircraft flying within uncontrolled airspace may be requested to maintain a continuous watch on the appropriate air-ground frequency of the ATS unit serving the flight information region within which the aircraft is flying.

3.1.3 Position reports

Nil.

3.1.4 Abbreviated reports

3.1.4.1 Abbreviated position reports should only contain the aircraft identification, position, time and flight level or altitude, unless otherwise specified.

3.1.4.2 In defined portions of the airspace, designated by the appropriate ATS authority, where:

- a) through secondary surveillance radar (SSR), individual identity and verified Mode C information are permanently available in the form of labels associated with the radar position of the aircraft concerned; and
- b) reliable air-ground communications coverage and direct pilot-to-controller communications exist,

the initial call after changing a radio channel may contain only the aircraft identification and level; subsequently, position reports may contain only aircraft identification, position and time.

3.1.5 Read-back of VHF channels

3.1.5.1 When instructed to contact an ATS unit on a different VHF communication channel, the pilot shall read back the newly assigned channel.

3.2 MANDATORY CARRIAGE OF 8.33 KHZ CHANNEL SPACING CAPABLE RADIO EQUIPMENT

(A10, Vol. V – Chapter 4)

3.2.1 All aircraft operating above FL 195 in the European Region shall be equipped with 8.33 kHz channel spacing capable radio equipment.

3.2.2 Exemptions may be granted by States concerned for certain types of aircraft operation and for certain areas of operation.

Note.— All exemptions granted by States, including the extent to which aircraft from other States can be exempted, should be specified in States' AIPs.

3.2.3 When ultra-high frequency (UHF) ground infrastructure permits a close operational link to a State's airspace management procedure, UHF-equipped State aircraft not equipped with an 8.33 kHz channel spacing capable radio will be allowed to operate in the airspace designated for 8.33 kHz channel spacing operations.

Note.— Details of UHF coverage meeting the above infrastructure requirements should be specified in States' AIPs.

3.3 CONTROLLER-PILOT DATA LINK COMMUNICATIONS (CPDLC)

Nil

3.4 SATELLITE VOICE COMMUNICATIONS (SATCOM)

Nil.

3.5 AERONAUTICAL MOBILE SERVICE

3.5.1 Selective calling (SELCAL)

Nil.

3.5.2 HF operations

Nil.

3.6 AERONAUTICAL FIXED SERVICE

3.6.1 AFTN rationalization

Nil.

3.7 RADIO CHANNELS/FREQUENCIES

Nil.

Chapter 4. NAVIGATION

4.1 PERFORMANCE-BASED NAVIGATION (PBN)

Note.— As the European (EUR) Region transitions to PBN as contained in the Performance-based Navigation Manual (Doc 9613), the contents of 4.1 will be amended.*

4.1.1 Area navigation (RNAV) specifications

4.1.1.1 RNAV 10 (RNP 10)

Nil.

4.1.1.2 RNAV 5

Nil.

4.1.1.3 RNAV 2

Nil.

4.1.1.4 RNAV 1

Nil.

4.1.1.5 Pre-PBN navigation specifications

4.1.1.5.1 RNP 5

Area of applicability

4.1.1.5.1.1 The following RNP 5 provisions shall apply to operations conducted under IFR on designated RNP 5 routes within the following FIRs:

Amman, Beirut, Cairo, Damascus and Tel Aviv.

* In preparation.

Means of compliance

4.1.1.5.1.2 Within the FIRs specified in 4.1.1.5.1.1, only RNAV-equipped aircraft having a navigation accuracy meeting RNP 5 may plan for operations under IFR on those ATS routes and within those level bands which have been specified as requiring RNP 5 in the relevant State AIP or NOTAM.

4.1.1.5.1.3 Aircraft operating under IFR on designated RNP 5 routes shall be equipped with, as a minimum, RNAV equipment meeting the following requirements:

- a) a system use accuracy equal to, or better than, 4.6 km (2.5 NM) for one standard deviation, with a 95 per cent containment value of ± 9.26 km (± 5 NM), thereby meeting the accuracy requirements for RNP 5; and
- b) an average continuity of service of 99.99 per cent of flight time.

4.1.1.5.1.4 Until such time as VOR or DME facilities cease to be available, the carriage of a single RNAV system having a navigation accuracy meeting RNP 5 but not meeting the above continuity of service requirements may be approved for RNAV operations if the aircraft is also carrying VOR and DME equipment.

4.1.1.5.1.5 Conformance to the navigation requirement shall be verified by the State of Registry or the State of the Operator, as appropriate.

*Note.— Guidance material concerning navigation accuracy requirements is contained in the Performance-based Navigation Manual (Doc 9613).**

4.1.1.5.1.6 The cross-track distances required to achieve a given level of containment for RNP 5 routes shall be as specified in the following table:

<i>Percentage containment for RNP 5</i>						
	95	96	97	98	99	99.5
km	9.3	10.2	10.2	11.1	12.0	13.9
NM	5.0	5.5	5.5	6.0	6.5	7.5

4.1.1.5.1.7 Correct operation of the aircraft RNAV system shall be verified before joining and during operation on an RNP 5 route. This shall include confirmation that:

- a) the routing is in accordance with the clearance; and
- b) the aircraft navigation accuracy meets RNP 5.

4.1.1.5.2 Precision RNAV (P-RNAV) and basic RNAV (B-RNAV)

4.1.1.5.2.1 The provisions in respect of en-route operations, as specified in 4.1.1.5.2.6 and 4.1.1.5.2.7, shall apply to all such operations conducted under IFR on the entire ATS route network as notified by the appropriate authorities in the following flight information regions (FIRs)/upper flight information regions (UIRs):

* In preparation.

Amsterdam, Ankara, Athina, Barcelona, Berlin, Bodø, Bordeaux, Bratislava, Bremen, Brest, Brindisi, Bruxelles, Bucuresti, Budapest, Canarias (AFI area of applicability), Casablanca, Chisinau, Düsseldorf, France, Frankfurt, Hannover, Istanbul, Kharkiv, København, Kyiv, Lisboa, Ljubljana, London, L'viv, Madrid, Malta, Marseille, Milano, München, Nicosia, Odessa, Oslo, Paris, Praha, Reims, Rhein, Riga, Roma, Rovaniemi, Scottish, Shannon, Simferopol, Skopje, Sofia, Stavanger, Sweden, Switzerland, Tallinn, Tampere, Tbilisi, Tirana, Trondheim, Tunis (FL 245 and above), Varna, Vilnius, Warszawa, Wien, Yerevan, Zagreb.

4.1.1.5.2.2 The provisions in respect of precision area navigation (P-RNAV) shall be applied whenever RNAV terminal control area (TMA) procedures, excluding the final and missed approach segments, are used.

Note.— The carriage of P-RNAV equipment has not yet been mandated in the EUR Region.

Means of compliance – general

4.1.1.5.2.3 Conformance to the navigation requirement shall be verified by the State of Registry or the State of the Operator, as appropriate.

Note.— Guidance material concerning navigation requirements associated with basic area navigation (B-RNAV) operations is contained in Joint Aviation Authority (JAA) Advisory Circular Joint (AC)J 20X4 (previously published as TGL No. 2, Rev 1) and for P-RNAV in JAA Temporary Guidance Leaflet (TGL) No. 10.

Means of compliance – terminal

4.1.1.5.2.4 Except as detailed in 6.6.3.2 and 4.1.1.5.2.5, only RNAV-equipped aircraft having a lateral track-keeping accuracy of ± 1 NM (2 SD), together with an ability to determine horizontal position to an accuracy sufficient to support the track-keeping requirement and having appropriate functionality and operational approval, may operate under IFR on the RNAV terminal area procedures. Such RNAV equipment is designated hereafter as P-RNAV.

Note.— The functional and operational approval requirements appropriate to P-RNAV are set out in JAA TGL No. 10, or equivalent.

4.1.1.5.2.5 Aircraft equipped with GNSS-based RNAV equipment may be used only on RNAV area procedures designated for GNSS and where it is identified that P-RNAV approval is not required to operate on the procedure.

Note.— To meet the requirement of GNSS-based RNAV, aircraft need to be approved in accordance with JAA ACJ 20X5 (previously known as TGL No. 3, Rev. 1), or equivalent.

Means of compliance – en route

4.1.1.5.2.6 Only aircraft approved for B-RNAV operations may plan for operations under IFR on the ATS routes of the FIRs/UIRs identified in 4.1.1.5.2.1. Aircraft not equipped with RNAV but having a navigation accuracy meeting RNP 5 will be restricted to operations on ATS routes which States may designate within their lower airspace in accordance with 4.1.1.5.2.7.

Note.— To meet the requirements of B-RNAV, aircraft need to be approved in accordance with JAA ACJ 20X4 (previously known as TGL No. 2, Rev. 1), or equivalent.

4.1.1.5.2.7 Until such time as VOR facilities cease to be available, the carriage of a single RNAV system not meeting an average continuity of service of 99.99 per cent of flight time may be approved for B-RNAV operations if the aircraft is also carrying VOR and distance-measuring equipment (DME) equipment.

Note.— States may designate domestic routes within their lower airspace to be available for aircraft not fitted with RNAV equipment but having a navigation accuracy meeting RNP 5.

4.1.2 Required navigation performance (RNP) specifications

4.1.2.1 RNP 4

Nil.

4.1.2.2 Basic RNP 1

Nil.

4.1.2.3 Advanced RNP 1

Nil.

4.2 REDUCED VERTICAL SEPARATION MINIMUM (RVSM)

Area of applicability

4.2.1 RVSM shall be applicable in that volume of airspace between FL 290 and FL 410 inclusive in the following FIRs/UIRs:

Amsterdam, Ankara, Baku, Barcelona, Beograd, Berlin, Bodø, Bratislava, Brindisi, Bruxelles, Bucuresti, Budapest, Casablanca, Chisinau, France, Hannover, Hellas, Istanbul, Kaliningrad, Kharkiv, København, Kyiv, Lisboa, Ljubljana, London, L'viv, Madrid, Malta, Milano, Minsk, Nicosia, Odesa, Oslo, Praha, Rhein, Riga, Roma, Rostov, Rovaniemi, Sarajevo, Scottish, Shannon, Simferopol, Skopje, Sofia, Stavanger, Sweden, Switzerland, Tallinn, Tampere, Tbilisi, Tirana, Trondheim, Tunis, Varna, Vilnius, Warszawa, Wien, Yerevan, Zagreb.

Note.— In the Rostov FIR, RVSM will be implemented over the high seas only.

4.2.2 RVSM shall be applicable in that part of the volume of airspace between FL 290 and FL 410 inclusive in the Canarias UIR (African-Indian Ocean (AFI) Region).

Note.— The volume of airspace specified in 4.2.1 and 4.2.2 shall be referred to as "EUR RVSM airspace".

Means of compliance

(A2 – Chapter 5; A6, Part I – Chapters 4, 7 and Appendix 4;
A6, Part II – Chapter 7 and Appendix 2)

4.2.3 Except for State aircraft, operators intending to conduct flights within the volume of airspace specified in 4.2.1 and 4.2.2 where RVSM is applied shall require an RVSM approval either from the State in which the operator is based or from the State in which the aircraft is registered. To obtain such an RVSM approval, operators shall satisfy the said State that:

- a) aircraft for which the RVSM approval is sought have the vertical navigation performance capability required for RVSM operations through compliance with the criteria of the RVSM minimum aviation system performance standards (MASPS);
- b) they have instituted procedures in respect of continued airworthiness (maintenance and repair) practices and programmes; and
- c) they have instituted flight crew procedures for operations in the EUR RVSM airspace specified in 4.2.1 and 4.2.2.

Note 1.— An RVSM approval is not restricted to a specific region. Instead, it is valid globally on the understanding that any operating procedures specific to a given region, in this case the EUR Region, should be stated in the operations manual or appropriate crew guidance.

Note 2.— Aircraft that have received State approval for RVSM operations will be referred to as “RVSM-approved aircraft”.

Note 3.— Aircraft that have not received State approval for RVSM operations will be referred to as “non-RVSM-approved aircraft”.

Note 4.— Detailed technical guidance material on the airworthiness, continued airworthiness, and the operational practices and procedures for the EUR RVSM airspace is provided in the Joint Aviation Authorities Administrative and Guidance Material, Section One: General, Part 3: Temporary Guidance Leaflet No. 6. The content of these documents will be supplemented and updated as required and as new material becomes available.

Chapter 5. SURVEILLANCE

(P-ATM – Chapter 8; P-OPS, Vol. I, Part III)

5.1 SECONDARY SURVEILLANCE RADAR (SSR)

5.1.1 Carriage of pressure-altitude reporting SSR transponders

Nil.

5.1.2 Code allocation methodology

5.1.2.1 All aircraft engaged in international flight shall be assigned an appropriate SSR code by the initial ATS unit at the beginning of the flight if it is to be conducted under instrument flight rules. The code shall be assigned in accordance with the *Air Navigation Plan — European Region*, Volume II — *FASID* (Doc 7754), Part IV, Attachment H, Principles and Procedures for the Distribution and Use of SSR Codes in the EUR Region.

5.1.3 Assignment of SSR codes

Nil.

5.1.4 Operation of pressure-altitude reporting SSR transponders

Nil.

5.1.5 Monitoring of SSR-derived information

Nil.

5.2 SSR MODE S

5.2.1 Carriage and operation of SSR Mode S

(A10, Vol. IV – Chapter 2)

5.2.1.1 The carriage and operation of Mode S airborne equipment shall be mandatory in airspace designated by the appropriate ATS authorities pursuant to the implementation of SSR Mode S enhanced surveillance in accordance with the following requirements:

a) for all IFR flights, including general air traffic (GAT):

- 1) Level 2 transponder, as a minimum, with downlink aircraft parameter (DAP) capability denoted as basic functionality and enhanced surveillance functionality as detailed in 5.2.1.2, Tables 1 and 2;

Note.— The employment of Level 4 transponders, as a minimum, with an aircraft data link processor (ADLP), is envisaged as a possible future requirement in association with the extended use of Mode S data link in an integrated air-ground communications network. A date will be proposed once a strategy for surveillance and communications has been defined, with due regard to an agreed minimum five-year notification period.

- b) for VFR flights, conducted in Class B and C airspace as designated by the appropriate ATS authority and in defined portions of Class D, E, F and G airspace where the carriage and operation of SSR transponders have already been prescribed:
 - 1) Level 2 transponder, as a minimum, with downlink aircraft parameter capability denoted as basic functionality as detailed in 5.2.1.2, Table 1;
- c) Mode S equipped aircraft shall report, automatically, basic functionality which includes aircraft identification (call sign used in flight);

Note 1.— This aircraft identification is not provided by the 24-bit aircraft address.

Note 2.— Level 1 transponders are not prescribed for international flights in the EUR Region.

- d) Mode S equipped aircraft with a maximum mass in excess of 5 700 kg or a maximum cruising true air-speed in excess of 324 km/h (175 kt) shall operate with antenna diversity.

5.2.1.2 Specific requirements for DAPs are classified separately as shown in Tables 1 and 2.

Table 1. Basic surveillance functionality

<i>Basic functionality</i>	<i>Associated register or protocol</i>
Automatic reporting of flight identity (call sign used in flight)	BDS 2.0
Transponder capability report	BDS 1.0 (enabling transponder data link capacities to be determined) BDS 1.7 (enabling registers that the transponder provides to be established)
Altitude reporting in 25-ft intervals (subject to aircraft availability)	Mode C transmission
Flight status (airborne/on the ground)	Provision of flight status filed data in the Mode S protocol

Table 2. Enhanced surveillance functionality

<i>Enhanced surveillance functionality</i>	<i>Associated register</i>
Magnetic heading	BDS 6.0
Speed (IAS/Mach no.)	
Vertical speed (barometric rate of climb/descend or, preferably, baro-inertial)	
True airspeed (TAS)	BDS 5.0
Roll angle	
Track angle variation	
True track angle	
Ground speed	

Note.— Additional DAPs that relate to aircraft intention are currently under evaluation, in particular, selected parameters contained in Comm-B Data Selector (BDS) Register 4.0 which have been recommended for inclusion once certain technical and institutional issues have been resolved. Any further requirements that may become necessary after the initial implementation of Mode S enhanced surveillance will be promulgated with due regard to an agreed minimum five-year notification period.

5.2.1.3 Dispensation from these requirements may be granted by the appropriate ATS authorities in accordance with the harmonized exemption arrangements, which have been coordinated on a regional basis, as follows:

- a) for VFR flights conducted by aircraft:
 - 1) already equipped with non-Mode S transponders having Mode A 4096 code capability and Mode C altitude reporting; or
 - 2) when the carriage of a transponder is impracticable; or
 - 3) when an exception to the requirement is authorized for a specific purpose;
- b) for IFR flights conducted by State (military) aircraft required to occasionally¹ operate as GAT, subject to the availability of a Mode 3/A transponder with 4096 code capability and Mode C altitude reporting. This concession should also apply, in the same circumstances, to State (military) aircraft equipped with a Mode S transponder but without the capability, either technically or operationally, to downlink the full set of prescribed DAPs.

These coordinated exemption arrangements shall be subject to periodic review and, in the first instance, should be for a period not exceeding three years.

Note.— Aircraft operators who are granted exemptions are advised that it will not be possible to provide the same level of air traffic service as that applied to aircraft which comply with the Mode S transponder carriage and operation requirements.

5.2.1.4 Operators of older aircraft that are equipped with Mode S transponders but where the avionics do not permit the extraction and transmission of the full set of prescribed DAPs shall be granted air traffic services to the maximum extent possible without penalty. However, this dispensation will be subject to review as in 5.2.1.3.

1. In this context, "occasionally" is taken to mean an average total flying time of 30 hours annually in the airspace subject to the mandatory carriage of operation of Mode S transponders.

5.2.2 Transition between Mode A/C and Mode S

Nil.

5.3 AIRBORNE COLLISION AVOIDANCE SYSTEMS (ACAS)**5.3.1 Carriage and operation of ACAS II**

(A10, Vol. IV – Chapter 4; P-OPS, Vol. I)

5.3.1.1 ACAS II shall be carried and operated in the EUR Region (and the Canarias FIR) by all turbine-engined aeroplanes having a maximum certificated take-off mass exceeding 5 700 kg or authorized to carry more than 19 passengers.

5.4 AUTOMATIC DEPENDENT SURVEILLANCE – CONTRACT (ADS-C)

Nil.

5.5 AUTOMATIC DEPENDENT SURVEILLANCE – BROADCAST (ADS-B)

Nil.

Chapter 6. AIR TRAFFIC SERVICES (ATS)

6.1 AIR TRAFFIC CONTROL (ATC) CLEARANCES

(A11 – Chapter 3; P-ATM – Chapter 4)

6.1.1 Content

Nil.

6.1.2 Adherence

Nil.

6.2 SEPARATION

6.2.1 Lateral

Nil.

6.2.2 Longitudinal

(P-ATM – Chapter 5)

6.2.2.1 Longitudinal separation minimum based on time and radar-observed distance

6.2.2.1.1 A minimum longitudinal separation of three minutes may be applied between aircraft on the same track or crossing tracks, whether at the same level, climbing or descending, provided that:

- a) their flight progress is continuously monitored by radar forming an integral part of the ATC unit concerned; and
- b) the distance between the aircraft, as observed by radar, is never less than 37 km (20 NM).

Note.— Use of this separation is subject to all the limitations in the use of radar specified in the PANS-ATM, 8.1.

6.2.3 Composite

Nil.

6.2.4 Vertical

(P-ATM – Chapter 5)

6.2.4.1 Between FL 290 and FL 410 inclusive, within the EUR RVSM airspace as specified in 4.2.1 and 4.2.2, the vertical separation minimum shall be:

- a) 300 m (1 000 ft) between RVSM-approved aircraft;
- b) 600 m (2 000 ft) between:
 - 1) non-RVSM-approved State aircraft and any other aircraft operating within the EUR RVSM airspace;
 - 2) all formation flights of State aircraft and any other aircraft operating within the EUR RVSM airspace; and
 - 3) non-RVSM-approved aircraft and any other aircraft operating within the EUR RVSM transition airspace, as specified in 6.10.2.1, and within airspace designated in accordance with 9.7.1.1.

6.2.4.2 ATC shall provide a minimum vertical separation of 600 m (2 000 ft) between an aircraft experiencing a communications failure in flight and any other aircraft when both aircraft are operating within the EUR RVSM airspace.

6.2.5 Radar

6.2.5.1 For transfer of radar control

6.2.5.1.1 Transfer of radar control based on the procedures specified in the PANS-ATM, 8.6.2 and 8.6.3, may be carried out without systematic use of the bidirectional speech facilities available between the adjacent units concerned, provided that:

- a) the detailed conditions applicable for the transfer are the subject of a bilateral agreement; and
- b) the minimum distance between successive aircraft during the period of transfer is agreed as one of the following values:
 - 1) 19 km (10 NM) when SSR information is used in accordance with the provisions of the PANS-ATM, provided that an overlapping radar coverage of at least 56 km (30 NM) between units involved exists; or
 - 2) 9.3 km (5 NM) when the conditions of 1) apply and both units involved possess electronic aids for immediate recognition of release and acceptance of aircraft under radar transfer.

6.2.6 Reduction in separation minima

Nil.

6.2.7 Airspace reservations

Nil.

6.3 MINIMUM FLIGHT LEVEL

6.3.1 Establishment

(P-ATM – Chapter 4)

6.3.1.1 Based on current and anticipated atmospheric pressure distribution, area control centres shall coordinate, when required, the lowest flight level to be used.

6.4 ATS ROUTES

6.4.1 Track systems

Nil.

6.4.2 RNAV

(A11 – Appendices 1 and 3)

6.4.2.1 All RNAV standard instrument arrival and departure procedures shall be suitably designated as RNAV in accordance with Annex 11, Appendix 3.

6.4.2.2 All other RNAV routes shall be designated in accordance with Annex 11, Appendix 1.

6.5 AERODROME OPERATIONS

6.5.1 Area of applicability

6.5.1.1 The provisions in Sections 6.5.2 to 6.5.4 and 13.2.1.1 shall apply in Canarias FIR (AFI Region) and all FIRs of the EUR Region except the following, which are located in the AFI or MID Regions:

Alger, Beirut, Cairo, Casablanca, Damascus, Tel Aviv, Tripoli and Tunis.

6.5.2 Intersection take-off

6.5.2.1 An aircraft may be cleared to depart from a published intersection take-off position upon request of the pilot, or if initiated by ATC and accepted by the pilot, provided that all of the conditions of 6.5.2.2 to 6.5.2.5 are met.

6.5.2.2 The reduced runway declared distances for each published intersection take-off position shall consist of the following:

- a) reduced take-off run available (reduced TORA);
- b) reduced take-off distance available (reduced TODA); and
- c) reduced accelerate-stop distance available (reduced ASDA).

6.5.2.3 The reference point from which the reduced runway declared distances for a published intersection take-off position are measured shall be in accordance with the relevant provisions in the *Air Navigation Plan — European Region*, Volume II — *FAS/D* (Doc 7754), Part III — AOP.

6.5.2.4 Reduced runway declared distances for an intersection take-off position shall be published in the relevant AIP, clearly distinguishable from full runway declared distances.

6.5.2.5 Signs shall be in accordance with Annex 14, Volume I.

6.5.3 Multiple line-ups on the same runway

6.5.3.1 Line-up instructions may be issued to more than one aircraft at different points on the same runway, taking into account that intersection take-off criteria shall be complied with, provided that:

- a) minimum visibility is established by the appropriate authority. Those minima shall permit the controller and the pilot to continuously observe the position of the relevant aircraft on the manoeuvring area by visual reference;
- b) local considerations, such as the airport layout, available radar equipment and local weather phenomena, are defined. The effect of jet blast/prop wash shall be taken into consideration;
- c) air traffic service for aircraft involved in multiple line-ups on the same runway is provided on the same radio frequency;
- d) pilots are advised of the position of any essential traffic on the same runway;
- e) the slope of the runway does not render preceding aircraft in the departure sequence invisible to succeeding aircraft on the same runway;
- f) pilot read-back of line-up instructions is required and contains the runway designator, the name of the intersection (if applicable) and the number in the departure sequence; and
- g) wake turbulence separation is applied.

6.5.4 Visual departures

6.5.4.1 A visual departure is a departure by an IFR flight when either part or all of an instrument departure procedure (e.g. standard instrument departure (SID)) is not completed and the departure is executed in visual reference to terrain.

6.5.4.2 An IFR flight may be cleared to execute a visual departure upon request of the pilot or if initiated by the controller and accepted by the pilot.

6.5.4.3 To execute a visual departure, the aircraft take-off performance characteristics shall allow them to make an early turn after take-off. When implemented, visual departure shall be applied under the following conditions:

- a) the meteorological conditions in the direction of take-off and the following climb-out shall not impair the procedure up to an altitude to be established and published by the appropriate authority, e.g. minimum flight altitude (MFA) or minimum sector altitude (MSA);

- b) the procedure shall be applied during the daytime. The procedure may be considered for application at night following a separate aeronautical study by the appropriate air traffic services (ATS) authority;
- c) the pilot shall be responsible for maintaining obstacle clearance until the specified altitude. Further clearance (route, heading, point) shall be specified by ATC; and
- d) separation shall be provided between an aircraft cleared to execute a visual departure and other departing and arriving aircraft.

6.5.4.4 Prior to take-off, the pilot shall agree to execute a visual departure by providing a read-back of the ATC clearance.

6.5.4.5 Any additional local restrictions shall be agreed on in consultation between the appropriate ATS authority and operators.

6.5.5 Visual approaches

Nil.

6.6 RNAV PROCEDURES

6.6.1 General

6.6.1.1 RNAV system operation

6.6.1.1.1 Correct operation of the aircraft RNAV system shall be established before joining and during operation on an RNAV route. This shall include confirmation that:

- a) the routing is in accordance with the clearance; and
- b) the RNAV navigation accuracy of the aircraft meets the navigation accuracy requirements of the RNAV route and arrival or departure procedures, as applicable.

6.6.1.2 Obstacle clearance

(A2 – Chapter 5; P-ATM – Chapters 4 and 8)

6.6.1.2.1 Unless an IFR aircraft is receiving navigation guidance from ATC in the form of radar vectors, the pilot is responsible for obstacle clearance. Therefore, the use of RNAV does not relieve pilots of their responsibility to ensure that any ATC clearance or instruction is safe in respect to obstacle clearance. ATC shall assign levels that are at or above established minimum flight altitudes.

6.6.2 En-route

Nil.

6.6.3 Terminal

6.6.3.1 For operation on RNAV arrival and departure routes, where clearance is given by ATC for an RNAV procedure for which the aircraft is not approved, the pilot is to advise ATC who will then seek to provide an alternative routing.

Note.— See 10.1 for relevant radiotelephony (RTF) phraseology.

6.6.3.2 Aircraft equipped with RNAV equipment having a lateral track-keeping accuracy of ± 5 NM (2 SD) with an ability to determine horizontal position to an accuracy sufficient to support the track-keeping requirement and having appropriate functionality, hereafter designated as basic area navigation (B-RNAV), may use RNAV (segments) of arrival and departure routes where these meet the following criteria:

a) the B-RNAV portion of the route must:

- 1) be above the appropriate minimum flight altitude (MFA) (e.g.: minimum radar vectoring altitude (MRVA) and minimum sector altitude (MSA)); and
- 2) be in accordance with established PANS-OPS criteria for en-route operations; and
- 3) conform to B-RNAV en-route design principles;

Note.— For minimum flight altitudes, see Annex 11, 2.22.

- b) the departure procedures must be conventional (non-RNAV) up to a conventional fix (or a minimum altitude). Beyond that fix (or minimum altitude), a B-RNAV procedure can be provided in accordance with the criteria in a); and
- c) the B-RNAV portion of an arrival route must terminate at a conventional fix in accordance with the criteria given in a) and b). Beyond that fix, the arrival shall be completed by a conventional (non-RNAV) procedure or by the provision of radar vectors; and
- d) due regard must be taken of those operating procedures of the users which may affect system performance. Examples include, but are not limited to, initial position fixing on the runway and minimum automatic flight control system (AFCS) engagement altitudes; and
- e) arrival and departure procedures, which can be flown by B-RNAV equipment, shall be identified explicitly as approved for application of B-RNAV.

6.6.4 State aircraft

(A11 – Chapter 3)

6.6.4.1 ATC procedures for State aircraft not equipped with RNAV but having a navigation accuracy meeting RNP 5

6.6.4.1.1 Within TMAs, State aircraft may only be routed via the RNAV terminal area procedures if they are equipped with the appropriate RNAV equipment (4.1.1.5.2 and 6.6.3.2 apply).

6.6.4.1.2 For such aircraft operating en route, the following procedures apply:

- a) State aircraft should be routed via VOR/DME-defined ATS routes; or

- b) if no such routes are available, State aircraft should be routed via conventional navigation aids, i.e. VOR/DME.

Note.— State aircraft routed in accordance with a) or b) may require continuous radar monitoring by the ATC unit concerned.

6.6.4.1.3 When the above procedures cannot be applied, the ATC unit shall provide State aircraft with radar vectors until the aircraft is capable of resuming its own navigation.

6.7 RNP PROCEDURES

6.7.1 General

Nil.

6.7.2 En-route

Nil

6.7.3 Terminal

Nil.

6.7.4 State aircraft

Nil.

6.8 COMPOSITE PROCEDURES

Nil.

6.9 MNPS PROCEDURES

Nil.

6.10 RVSM PROCEDURES

6.10.1 General

6.10.1.1 Except for operations within the EUR RVSM transition airspace, as specified in 6.10.2.1, and within airspace designated in accordance with 9.7.1.1, only RVSM-approved aircraft and non-RVSM-approved State aircraft shall be issued an ATC clearance into the EUR RVSM airspace.

6.10.1.2 ATC clearance into the EUR RVSM airspace shall not be issued to formation flights of aircraft.

6.10.2 Transition to/from RVSM airspace

6.10.2.1 General

6.10.2.1.1 Transition tasks associated with the application of a 300 m (1 000 ft) vertical separation minimum within the EUR RVSM airspace, as specified in 4.2.1 and 4.2.2, shall be carried out in all or parts of the following FIRs/UIRs:

Ankara, Baku, Barcelona, Canarias (AFI Region), Casablanca, France, Hellas, Kharkiv, Kyiv, Madrid, Malta, Minsk, Nicosia, Riga, Rostov, Rovaniemi, Simferopol, Tallinn, Tampere, Tbilisi, Tunis.

Note.— The volume of airspace specified in 6.10.2.1.1 shall be referred to as the “EUR RVSM transition airspace”.

6.10.2.2 RVSM-approved aircraft and non-RVSM-approved State aircraft entering the EUR RVSM airspace from a non-RVSM environment

6.10.2.2.1 RVSM-approved aircraft and non-RVSM-approved State aircraft entering the EUR RVSM airspace from a non-RVSM environment shall be established at a flight level:

- a) in accordance with the table of cruising levels, as published in Annex 2, Appendix 3, a); and/or
- b) in accordance with a flight level allocation scheme (FLAS), if applicable; and/or
- c) as specified in an inter-area control centre (ACC) letter of agreement.

6.10.2.2.2 Any changes from non-RVSM flight levels to RVSM flight levels shall be initiated by the first ACC/upper area control centre (UAC) providing ATC service to the aircraft within the EUR RVSM airspace and shall be achieved before the aircraft passes the transfer of control point to the adjacent ACC/UAC, unless otherwise specified in an inter-ACC letter of agreement.

6.10.2.3 Aircraft entering a non-RVSM environment from the EUR RVSM airspace

6.10.2.3.1 Aircraft entering a non-RVSM environment from the EUR RVSM airspace shall be established with the applicable vertical separation minimum.

6.10.2.3.2 The applicable vertical separation minimum shall be established by the last ACC/UAC providing ATC service to the aircraft within the EUR RVSM airspace and before the aircraft passes the transfer of control point to the adjacent ACC/UAC.

6.10.2.3.3 Such aircraft shall be established at a flight level:

- a) in accordance with the table of cruising levels, as published in Annex 2, Appendix 3, b); and/or
- b) in accordance with a flight level allocation scheme, if applicable; and/or
- c) as specified in an inter-ACC letter of agreement.

6.10.2.4 Non-RVSM-approved civil operations

6.10.2.4.1 Non-RVSM-approved aircraft operating from a departure aerodrome outside the lateral limits of the EUR RVSM airspace with a destination aerodrome within the lateral limits of the EUR RVSM airspace shall be cleared to a flight level below 290. Such flight level changes shall be initiated by the first ACC/UAC providing ATC service to the aircraft within the EUR RVSM airspace and shall be achieved before the aircraft passes the transfer of control point to the adjacent ACC/UAC.

Note.— Refer to 2.1.6.2 for related flight planning requirements.

6.10.2.4.2 Non-RVSM-approved aircraft operating from a departure aerodrome to a destination aerodrome, both of which are within the lateral limits of the EUR RVSM airspace, shall be cleared to a flight level below 290.

Note.— Refer to 2.1.6.3 for related flight planning requirements.

6.10.2.4.3 Non-RVSM-approved aircraft operating from a departure aerodrome within the lateral limits of the EUR RVSM airspace to a destination aerodrome outside the lateral limits of the EUR RVSM airspace:

- a) shall be cleared to a flight level below 290; and
- b) may be cleared to FL 290 or above by the last ACC/UAC providing ATC service to the aircraft within the EUR RVSM airspace. Such flight level changes shall be achieved before the aircraft passes the transfer of control point to the adjacent ACC/UAC.

Note — Refer to 2.1.6.4 for related flight planning requirements.

6.10.2.4.4 Non-RVSM-approved aircraft operating from a departure aerodrome to a destination aerodrome, both of which are outside the lateral limits of the EUR RVSM airspace, with a portion of the route within the lateral limits of the EUR RVSM airspace:

- a) shall be cleared to a flight level below 290 or above 410 by the first ACC/UAC providing ATC service to the aircraft within the EUR RVSM airspace. Such flight level changes shall be achieved before the aircraft passes the transfer of control point to the adjacent ACC/UAC, in accordance with the FLAS, if applicable, and/or as specified in an inter-ACC letter of agreement; and
- b) may subsequently be cleared to a requested flight level within or through the EUR RVSM airspace by the last ACC/UAC providing ATC service to the aircraft within the EUR RVSM airspace. Such flight level changes shall be achieved before the aircraft passes the transfer of control point to the adjacent ACC/UAC.

Note.— Refer to 2.1.6.5 for related flight planning requirements.

6.11 ATS COORDINATION**6.11.1 Between units providing area control services**

(P-ATM – Chapter 10)

6.11.1.1 If a flight should enter an adjacent area, information concerning any revision of the estimate of three minutes or more shall be forwarded to the adjacent area control centre normally by telephone.

6.11.2 RNAV

(P-ATM – Chapter 11)

Aircraft experiencing degradation or failure of RNAV – computer-assisted coordination of estimate

6.11.2.1 In the case of automated messages not containing the information provided in Item 18 of the flight plan, the sending ATC unit shall inform the receiving ATC unit by supplementing the ACT message verbally with the phrase “RNAV OUT OF SERVICE” after the call sign of the aircraft concerned.

Aircraft experiencing degradation or failure of RNAV – verbal coordination of estimate

6.11.2.2 When a verbal coordination process is being used, the sending ATC unit shall include the phrase “RNAV OUT OF SERVICE” at the end of the message.

State aircraft not equipped with RNAV – computer-assisted coordination of estimate

6.11.2.3 In the case of automated messages not containing the information provided in Item 18 of the flight plan, the sending ATC unit shall inform the receiving ATC unit by supplementing the ACT message verbally with the phrase “NEGATIVE-RNAV” after the call sign of the aircraft concerned.

State aircraft not equipped with RNAV – verbal coordination of estimate

6.11.2.4 When a verbal coordination process is being used, the sending ATC unit shall include the phrase “NEGATIVE-RNAV” at the end of the message.

6.11.3 RNP

Nil.

6.11.4 RVSM

6.11.4.1 If the receiving unit has not received a flight plan, the sending ATC unit shall verbally inform the receiving unit whether or not the aircraft is RVSM-approved.

6.11.4.2 When an automated message does not contain the information filed in Item 18 of the flight plan relevant to RVSM operations, the sending ATC unit shall inform the receiving unit of that information by supplementing the ACT message verbally, using the term “NEGATIVE RVSM” or “NEGATIVE RVSM STATE AIRCRAFT”, as applicable.

6.11.4.3 When a verbal coordination process is being used, the sending ATC unit shall include the information filed in Item 18 of the flight plan relevant to RVSM operations at the end of the verbal estimate message, using the term “NEGATIVE RVSM” or “NEGATIVE RVSM STATE AIRCRAFT”, as applicable.

6.11.4.4 When a single aircraft is experiencing an in-flight contingency that impacts on RVSM operations, the associated coordination message(s) shall be supplemented verbally by a description of the cause of the contingency.

6.11.5 SSR codes

Nil.

6.12 ATS MESSAGES

6.12.1 Flight plan and departure

(P-ATM – Chapter 11)

6.12.1.1 Filed flight plan messages for flights intending to operate within the NAT Region at a distance of 110 km (60 NM) or less from the northern and southern boundaries of Gander Oceanic and Shanwick Oceanic FIRs shall be addressed to the ACCs in charge of the NAT flight information regions along the route and, in addition, to the ACCs in charge of the nearest adjacent NAT FIRs.

6.12.1.2 For flights departing from points within adjacent regions and entering the NAT Region without intermediate stops, filed flight plan messages shall be transmitted to the appropriate ACCs immediately after the flight plan has been submitted.

6.12.1.3 Provided reliable ATS speech circuits exist between the successive ATS units concerned with the flight, departure messages may be omitted for IFR flights operated within areas or along routes designated by mutual agreements between the States concerned.

6.12.2 Arrival

Nil.

6.12.3 Boundary estimates

6.12.3.1 When so specified in appropriate aeronautical information publications by the States concerned, flight plans and associated flight plan messages concerning flights within or intending to enter the airspace where the State(s) concerned are responsible for the provision of ATS shall not include FIR boundary estimates.

6.12.4 Computer-assisted coordination

(P-ATM – Chapter 10)

6.12.4.1 General

6.12.4.1.1 When so agreed between adjacent ATC units, a computer-assisted coordination process shall be introduced to eliminate the need for verbal coordination of boundary estimates and to reduce the amount of manual data input into ATC computers.

6.12.4.1.2 When introduced between adjacent area control centres for the purpose of activation and updating of FPL messages or RPLs, data processing shall be based upon the messages and procedures described in 6.12.4.2, 6.12.4.3 and 6.12.4.4.

6.12.4.1.3 The minimum requirement for the activation of flight plan data shall be the content of the boundary estimate (EST) message. When so agreed between adjacent units, the activate (ACT) message shall be used instead of the EST message, enabling additional information to be transmitted.

6.12.4.1.4 The means of communication to be employed and the procedures to be applied for the exchange of messages in the computer-assisted coordination process shall be specified by bilateral agreement between the ATC units concerned.

6.12.4.2 Messages

6.12.4.2.1 The EST message and the ACT message shall be the alternative means employed to achieve flight plan activation. The EST message shall contain Field Types 3, 7, 13a, 14 and 16a. The ACT message shall contain Field Types 3, 7, 13a, 14 and 16a, identical to that of the EST message and, in addition, one or more Field Types 22 as bilaterally agreed between adjacent ATC units for the inclusion of other current information associated with the flight plan.

6.12.4.2.2 The safeguarding of the transmitted message is achieved through the logical acknowledgement message (LAM) which is sent by the receiving ATS unit to the sending ATS unit. The LAM shall contain Field Type 3 (message type, number and reference data) with reference to the appropriate ATS message which it acknowledges.

Example: (LAMP/M178M/P100)

Meaning: LAM sent by Paris (P) to Maastricht (M) followed by the sending unit serial number (178) of this message, followed by the ATS unit identifiers (M/P) and serial number (100) or related estimate.

6.12.4.3 Operational procedure

6.12.4.3.1 The following basic rules shall apply for the use of EST and ACT messages:

- a) These messages shall be automatically generated, exchanged and processed to obviate human intervention to the extent practicable.
- b) A single message shall be sent in respect of each flight due to be transferred and any subsequent revision shall be the subject of verbal coordination.
- c) The message shall provide the most recent information available on all transfer conditions at the time of transmission.
- d) Acceptance by the receiving unit of the transfer conditions implied in the message shall be assumed, unless the receiving unit initiates verbal coordination to amend the transfer conditions.

Note.— Bilateral arrangement may be required to cover the event of failure of the ATS direct speech circuit.

- e) There shall be bilateral agreement as to the boundary point and transmission times for each route. The normal transmission time shall be 15 minutes before the flight concerned is expected to cross the boundary.

- f) In the event of data not being correlated by the receiving computer with an appropriate entry in its flight plan database, the computer shall originate a warning to the appropriate ATC sector to take necessary action for the acquisition of missing flight plan details. This shall normally involve a telephone inquiry.
- g) In the event of incomprehensible or illogical data being detected within the message, the computer shall initiate an appropriate warning to the ATC sector involved, if this can be determined, for further action.

Note.— Any system-initiated warning shall require reversion to verbal coordination.

6.12.4.4 Data protection procedure

6.12.4.4.1 Appropriate safeguards in the automatic communication process shall be provided using a logical acknowledgement procedure.

6.12.4.4.2 This procedure shall be based on the following basic rules:

- a) The receiving computer shall transmit a LAM in response to an activation message received and processed, up to the point where the operational content will be presented to the appropriate air traffic controller.
- b) The transferring ATC unit shall set an agreed reaction parameter time of up to two minutes from transmission of the activation message. If the LAM is not received within that time frame, an operational warning shall be initiated and reversion to telephone and manual mode shall ensue. If the appropriate ATC sector cannot be determined, a LAM shall not be transmitted.

6.13 FLIGHT INFORMATION SERVICE (FIS)

6.13.1 Automatic terminal information services (ATIS)

(A11 – Chapter 4)

6.13.1.1 An ATIS broadcast shall not require the assignment of a VHF channel that is subject to international channel assignment.

6.13.1.2 An ATIS broadcast, when containing departure information only and when requiring transmission on a discrete channel, shall be transmitted on a ground control VHF channel.

6.13.1.3 ATIS broadcast messages need not contain an instruction that, on initial contact with the appropriate ATS unit, the pilot acknowledge receipt of the ATIS message.

6.13.2 SIGMETs

(P-ATM – Chapter 9)

6.13.2.1 Transmission of SIGMET information to aircraft shall be at the initiative of the appropriate ATS unit, by the preferred method of directed transmission followed by acknowledgement, or by a general call when the number of aircraft would render the preferred method impracticable.

6.13.3 Special air-reports

(P-ATM – Chapter 9)

6.13.3.1 Special air-reports shall be transmitted with the least possible delay to aircraft likely to be affected and shall cover the portion of the route up to one hour's flying time ahead of the aircraft.

6.13.4 Amended aerodrome forecast

(P-ATM – Chapter 9)

6.13.4.1 Amended aerodrome forecasts shall be passed to aircraft within 60 minutes from the aerodrome of destination, unless the information has been made available through other means.

6.13.5 Landing forecasts

Nil.

6.14 ALERTING SERVICES

(P-ATM – Chapter 9)

6.14.1 The procedures for an alerting service detailed in PANS-ATM, 9.2, are applicable to all sectors of flights over mountainous or sparsely populated areas, including sea areas.

Chapter 7. SAFETY MONITORING

7.1 STRATEGIC LATERAL OFFSET PROCEDURES (SLOP)

7.2 AIRSPACE MONITORING

7.2.1 General

Nil.

7.2.2 RNAV

Nil.

7.2.3 RNP

Nil.

7.2.4 RVSM

7.2.4.1 Monitoring of flight operations in the EUR RVSM airspace shall be conducted to assess the continuing compliance of aircraft with the height-keeping performance requirements.

Note.— Monitoring will be conducted in accordance with the appropriate material issued by ICAO. When notified, operators will be required to cooperate in the monitoring programme.

Chapter 8. AIR TRAFFIC FLOW MANAGEMENT (ATFM)

8.1 PROVISION

(P-ATM – Chapter 3)

8.1.1 ATFM is available to all States of the EUR Region and is provided in accordance with the provisions contained in the PANS-ATM (Doc 4444) and the EUR Air Navigation Plan (Doc 7754).

Note.— A list of the States receiving services from the ATFM System of the EUR Region (ASTER) is contained in the Air Navigation Plan — European Region, Volume II — FASID (Doc 7754), Part V.III, Attachment B.

8.2 APPLICATION

8.2.1 All IFR flights, including the IFR portions of mixed IFR/VFR flights, regardless of status, are taken into account when measuring demand against ATC capacity. Whenever it becomes necessary to manage this demand, ATFM may be used and departure slots issued by means of calculated take-off times.

8.2.2 Flights departing from areas beyond adjacent FIRs as set out in the ANP — EUR FASID, Part V.III, Attachment C, are exempted from CFMU ATFM slot allocation.

Note 1.— A list of the FIRs/UIRs adjacent to the EUROCONTROL CFMU area of responsibility which receive ASTER services from the CFMU is contained in the ANP — EUR FASID, Part V.III, Attachment C.

Note 2.— Detailed procedures applicable to the CFMU area of responsibility are contained in the EUROCONTROL “Basic CFMU Handbook”.

8.3 EXEMPTIONS FROM ATFM SLOT ALLOCATION

(P-ATM – Chapter 3)

8.3.1 Flights carrying Heads of State (or equivalent status) and flights conducting search and rescue operations are exempted from ATFM slot allocations.

Note.— The corresponding ATFM flight planning requirements are provided in 2.2.3.

8.3.2 States receiving services from ASTER, as defined in the ANP — EUR FASID, Part V.III, Attachments B and C, may approve additional exemptions from the ATFM slot allocation for specific flights departing from an aerodrome located within their territory.

8.3.3 States shall publish the procedures for requesting ATFM slot allocation exemptions in their national AIPs.

Note.— Detailed procedures and information pertaining to ATFM slot allocation exemptions, for the area covered by the CFMU, are contained in the EUROCONTROL “Basic CFMU Handbook”.

8.3.4 States shall carry out compliance monitoring of ATFM slot allocation exemptions granted in accordance with 8.3.1 and 8.3.2.

8.4 DEPARTURE SLOT MONITORING

8.4.1 ATC is responsible for departure slot monitoring at departure aerodromes. The exact procedures to be followed will depend on the way that ATS is organized at each aerodrome. There are, however, three requirements:

- a) States shall ensure that an ATFM slot, if applicable, be included as part of the ATC clearance. ATC shall take account of an applicable slot or flight suspension when a clearance is issued.
- b) ATC units responsible for departure slot monitoring shall be provided with the necessary information concerning the restrictions in force and slots allocated.
- c) Aircraft operators shall inform themselves of and adhere to:
 - 1) general ATFM procedures including flight plan filing, strategic ATFM measures and message exchange requirements; and
 - 2) current ATFM measures (e.g. specific measures applicable on the day in question such as ATFM slot or flight suspension).

8.5 PROMULGATION OF ATFM MEASURES

8.5.1 Strategic ATFM measures

(A15 – Chapter 4; P-ATM – Chapter 3)

8.5.1.1 Following the agreement of all States concerned, ATFM units shall promulgate a traffic orientation scheme, when required, together with any other ATFM measures.

8.5.1.2 Coordinated strategic air traffic flow measures shall be promulgated in accordance with AIRAC procedures on the basis of the following principles:

- a) the information shall be promulgated in English as aeronautical information regulation and control (AIRAC) ATFM Bulletins in accordance with the following requirements of Annex 15 concerning AIRAC AIP Supplements:
 - 1) the effective date of the ATFM Bulletin shall be specified;
 - 2) an ATFM Bulletin number shall be assigned; and
 - 3) the ATFM Bulletin distribution shall be on the basis of a pre-determined distribution list including, but not limited to, all international AIS offices of EUR provider and user States; and

Note.— If required, national distribution will be determined by each State in accordance with its needs. Furthermore, if an ATFM Bulletin is redistributed, it should reference the original serial number.

- b) following the publication of an AIRAC ATFM Bulletin, a trigger NOTAM in series F shall be promulgated in accordance with Annex 15 provisions (8.5.2.1 also refers).

8.5.2 Amendments to promulgated strategic ATFM measures

(A15 – Chapter 5; P-ATM – Chapter 3)

8.5.2.1 Changes to promulgated strategic ATFM measures, as defined in 8.5.1.1, shall be promulgated using a NOTAM in series F. This NOTAM shall be coordinated and provided in accordance with Annex 15 provisions. It shall include the following:

a) Item Q) shall include:

FIR: EUCF or EUXX

CODE: QPFCA (respectively QPFCD or QPFCH, whichever is appropriate)

TRAFFIC: I

PURPOSE: NBO

SCOPE: E

LOWER/UPPER: AS APPROPRIATE

COORDINATES/RADIUS: THE EPICENTRE AND RADIUS OF THE AREA OF CONCERN.

b) As regards the FIR field in Item Q): EUCF should be used if Item A) contains one four-letter location indicator only or EUXX if Item A) contains more than one four-letter location indicator. EU relates to European multinational air navigation facilities whereas CF relates specifically to the CFMU. (XX are the letters usually used to identify NOTAMs with multiple locations in Item A).)

c) Item A) shall include EU plus the two-letter ICAO identifier of the State concerned; it could include one to seven four-letter ICAO location identifiers representing the State(s) affected by the ATFM measures or it could include EUCF if the restrictions apply to the entire area concerned; and

d) Item C): because of the temporary nature of ATFM measures, the abbreviation PERM shall not be used.

8.5.3 ATFM circulars and information

(A15 – Chapter 7)

8.5.3.1 General information pertaining to air traffic flow management issues shall be promulgated using an ATFM Circular in accordance with the requirements of Annex 15 concerning Aeronautical Information Circulars. Distribution of the ATFM Circulars shall be in accordance with the procedures specified in 8.5.1.2 a) 3).

Note 1.— If required, national distribution will be determined by each State in accordance with its needs. Furthermore, if an ATFM Circular is redistributed, it should reference the original serial number.

Note 2.— Provisions for promulgation of information on ATFM measures, including updates of local ATFM measures and other additional information, are described in the EUROCONTROL “Basic CFMU Handbook”.

8.5.4 Pre-flight information bulletin (PIB)

(A15 – Chapter 8)

8.5.4.1 Information concerning ATFM measures promulgated using NOTAM in series F shall be included in the PIB.

8.5.5 Query procedures

8.5.5.1 Standard NOTAM query procedures shall be used to access NOTAM series F information.

Chapter 9. SPECIAL PROCEDURES

9.1 EMERGENCY DESCENT PROCEDURES

(P-ATM – Chapter 15)

9.1.1 Action by the pilot-in-command

9.1.1.1 When an aircraft operated as a controlled flight experiences sudden decompression or a malfunction requiring an emergency descent, the aircraft shall, if able:

- a) initiate a turn away from the assigned route or track before commencing the emergency descent;
- b) advise the appropriate air traffic control unit as soon as possible of the emergency descent;
- c) set transponder to Code 7700 and select the Emergency Mode on the automatic dependent surveillance/controller-pilot data link communications (ADS/CPDLC) system, if applicable;
- d) turn on aircraft exterior lights;
- e) watch for conflicting traffic both visually and by reference to ACAS (if equipped); and
- f) coordinate its further intentions with the appropriate ATC unit.

9.1.1.2 The aircraft shall not descend below the lowest published minimum altitude that will provide a minimum vertical clearance of 300 m (1 000 ft) or, in designated mountainous terrain, of 600 m (2 000 ft) above all obstacles located in the area specified.

9.1.2 Action by the ATS unit

9.1.2.1 Immediately upon recognizing that an emergency descent is in progress, air traffic control units shall acknowledge the emergency on radiotelephony.

9.1.2.2 In particular, they may, as required by the situation:

- a) suggest a heading to be flown, if able, by the aircraft carrying out the emergency descent in order to achieve separation from other aircraft concerned;
- b) state the minimum altitude for the area of operation, only if the level-off altitude stated by the pilot is below such minimum altitude, together with the applicable QNH altimeter setting; and
- c) as soon as possible, provide separation from conflicting traffic, or issue essential traffic information, as appropriate.

9.1.2.3 When deemed necessary, air traffic control will broadcast an emergency message, or cause such message to be broadcast, to other aircraft concerned to warn them of the emergency descent.

9.2 CONTINGENCY PROCEDURES INCLUDING TURN BACKS

Nil.

9.3 AIR-GROUND COMMUNICATION FAILURE

Note.— Refer to 6.2.4.2 for ATC procedures regarding aircraft experiencing a communications failure in EUR RVSM airspace.

9.4 DEGRADATION OR FAILURE OF THE RNAV SYSTEM

9.4.1 Action by the pilot-in-command

9.4.1.1 When an aircraft cannot meet the requirements as specified in either 4.1.1.5.2.4 or 6.6.3.2, as required by the RNAV route or procedure, as a result of a failure or degradation of the RNAV system, a revised clearance shall be requested by the pilot.

Note.— See 10.1 for relevant radiotelephony (RTF) phraseology.

9.4.1.2 If an aircraft cannot meet the requirements as specified in 6.6.3.2 due to a failure or degradation of the RNAV system that is detected before departure from an aerodrome where it is not practicable to effect a repair, the aircraft concerned should be permitted to proceed to the nearest suitable aerodrome where the repair can be made. When granting clearance to such aircraft, ATC should take into consideration the existing or anticipated traffic situation and may have to modify the time of departure, flight level or route of the intended flight. Subsequent adjustments may become necessary during the course of the flight.

Note.— See 10.1 for relevant RTF phraseology.

9.4.1.3 With respect to the degradation/failure in flight of an RNAV system, while the aircraft is operating on an ATS route requiring the use of B-RNAV:

- a) aircraft should be routed via VOR/DME-defined ATS routes; or
- b) if no such routes are available, aircraft should be routed via conventional navigation aids, i.e. VOR/DME; or
- c) when the above procedures are not feasible, the ATC unit should, where practicable, provide the aircraft with radar vectors until the aircraft is capable of resuming its own navigation.

Note.— Aircraft routed in accordance with a) or b) may, where practicable, require continuous radar monitoring by the ATC unit concerned.

9.4.1.4 With respect to the degradation/failure in flight of an RNAV system, while the aircraft is operating on an arrival or departure procedure requiring the use of RNAV:

- a) the aircraft should be provided with radar vectors until the aircraft is capable of resuming its own navigation, or
- b) the aircraft should be routed by conventional navigation aids, i.e. VOR/DME.

9.4.2 Action by the ATS unit

9.4.2.1 Subsequent ATC action in respect of an aircraft that cannot meet the requirements as specified in either 4.1.1.5.2.4 or 6.6.3.2, due to a failure or degradation of the RNAV system, will be dependent upon the nature of the reported failure and the overall traffic situation. Continued operation in accordance with the current ATC clearance may be possible in many situations. When this cannot be achieved, a revised clearance, as specified in 9.4.1.3 and 9.4.1.4, may be required to revert to VOR/DME navigation.

9.5 LOSS OF VERTICAL NAVIGATION PERFORMANCE REQUIRED FOR RVSM

9.5.1 General

9.5.1.1 An in-flight contingency affecting flight in the EUR RVSM airspace pertains to unforeseen circumstances that directly impact on the ability of one or more aircraft to operate in accordance with the vertical navigation performance requirements of the EUR RVSM airspace as specified in 4.2. Such in-flight contingencies can result from degradation of aircraft equipment associated with height-keeping or from turbulent atmospheric conditions.

9.5.1.2 The pilot shall inform ATC as soon as possible of any circumstances where the vertical navigation performance requirements for the EUR RVSM airspace cannot be maintained. In such cases, the pilot shall obtain a revised ATC clearance prior to initiating any deviation from the cleared route and/or flight level, whenever possible. When a revised ATC clearance cannot be obtained prior to such a deviation, the pilot shall obtain a revised clearance as soon as possible thereafter.

9.5.1.3 ATC shall render all possible assistance to a pilot experiencing an in-flight contingency. Subsequent ATC actions will be based on the intentions of the pilot, the overall air traffic situation and the real-time dynamics of the contingency.

9.5.2 Degradation of aircraft equipment – pilot reported

(A6, Part I – Chapter 7 and Appendix 4; A6, Part II – Chapter 7 and Appendix 2)

9.5.2.1 When informed by the pilot of an RVSM-approved aircraft operating in the EUR RVSM airspace that the aircraft's equipment no longer meets the RVSM MASPS, as specified in 4.2.3, ATC shall consider the aircraft as non-RVSM-approved.

9.5.2.2 ATC shall take action immediately to provide a minimum vertical separation of 600 m (2 000 ft) or an appropriate horizontal separation from all other aircraft concerned that are operating in the EUR RVSM airspace. An aircraft rendered non-RVSM-approved shall normally be cleared out of the EUR RVSM airspace by ATC when it is possible to do so.

9.5.2.3 Pilots shall inform ATC, as soon as practicable, of any restoration of the proper functioning of equipment required to meet the RVSM MASPS.

9.5.2.4 The first ACC/UAC to become aware of a change in an aircraft's RVSM status shall coordinate with adjacent ACCs/UACs, as appropriate.

9.5.3 Severe turbulence – not forecast

9.5.3.1 When an aircraft operating in the EUR RVSM airspace encounters severe turbulence due to weather or wake vortex that the pilot believes will impact the aircraft's capability to maintain its cleared flight level, the pilot shall inform ATC. ATC shall establish either an appropriate horizontal separation or an increased minimum vertical separation.

9.5.3.2 ATC shall, to the extent possible, accommodate pilot requests for flight level and/or route changes and shall pass on traffic information as required.

9.5.3.3 ATC shall solicit reports from other aircraft to determine whether RVSM should be suspended entirely or within a specific flight level band and/or area.

9.5.3.4 The ACC/UAC suspending RVSM shall coordinate such suspension(s) and any required adjustments to sector capacities with adjacent ACCs/UACs, as appropriate, to ensure an orderly progression to the transfer of traffic.

9.5.4 Severe turbulence – forecast

9.5.4.1 When a meteorological forecast is predicting severe turbulence within the EUR RVSM airspace, ATC shall determine whether RVSM should be suspended and, if so, for how long and for which specific flight level(s) and/or area.

9.5.4.2 In cases where RVSM will be suspended, the ACC/UAC suspending RVSM shall coordinate with adjacent ACCs/UACs with regard to the flight levels appropriate for the transfer of traffic, unless a contingency flight level allocation scheme has been determined by letter of agreement. The ACC/UAC suspending RVSM shall also coordinate applicable sector capacities with adjacent ACCs/UACs as appropriate.

9.6 EN-ROUTE DIVERSION

Nil.

9.7 INTER-REGION INTERFACE FOR NON-RVSM-APPROVED AIRCRAFT

9.7.1 European/North Atlantic (NAT) interface

9.7.1.1 The State authorities responsible for Bodø (Domestic), Stavanger, Trondheim, Scottish, Shannon, London, Brest, Madrid and Lisboa FIRs may establish designated airspace within their FIRs for the purpose of transitioning non-RVSM-approved aircraft operating to and from the NAT Region.

9.7.1.2 ACCs/UACs providing ATC service within airspace designated in accordance with 9.7.1.1 may clear such non-RVSM-approved aircraft to climb or descend through RVSM airspace.

9.7.1.3 Climbs or descents through RVSM airspace, in accordance with 9.7.1.2, shall be achieved before the aircraft passes the transfer of control point to the adjacent ACC/UAC, if applicable, unless otherwise specified in an inter-ACC letter of agreement.

9.8 MANNED BALLOON FLIGHTS

Nil.

Chapter 10. PHRASEOLOGY

(P-ATM – Chapter 12)

10.1 RNAV

<i>Circumstances</i>	<i>Phraseologies</i>
RNAV arrival or departure procedure cannot be accepted by the pilot	*UNABLE (<i>designator</i>) DEPARTURE [or ARRIVAL] DUE RNAV TYPE
Pilot is unable to comply with an assigned terminal area procedure	*UNABLE (<i>designator</i>) DEPARTURE [or ARRIVAL] (<i>reasons</i>)
ATC unable to assign an RNAV arrival or departure procedure requested by a pilot due to the type of on-board RNAV equipment	UNABLE TO ISSUE (<i>designator</i>) DEPARTURE [or ARRIVAL] DUE RNAV TYPE
ATC unable to assign an arrival or departure procedure requested by the pilot	UNABLE TO ISSUE (<i>designator</i>) DEPARTURE [or ARRIVAL] (<i>reasons</i>)
Confirmation whether a specific RNAV arrival or departure procedure can be accepted	ADVISE IF ABLE (<i>designator</i>) DEPARTURE [or ARRIVAL]
Informing ATC of RNAV degradation or failure	*(<i>aircraft call sign</i>) UNABLE RNAV DUE EQUIPMENT
Informing ATC of no RNAV capability	*(<i>aircraft call sign</i>) NEGATIVE RNAV
* Denotes pilot transmission	

10.2 RNP

Nil.

10.3 SURVEILLANCE

Nil.

10.4 AERODROME OPERATIONS

<i>Circumstances</i>	<i>Phraseologies</i>
Request for departure from an intersection take-off position	*REQUEST DEPARTURE FROM RUNWAY (<i>number</i>), INTERSECTION (<i>name of intersection</i>)
Approval of requested departure from an intersection take-off position	APPROVED, TAXI TO HOLDING POINT RUNWAY (<i>number</i>), INTERSECTION (<i>name of intersection</i>)
Denial of requested departure from an intersection take-off position	NEGATIVE, TAXI TO HOLDING POINT RUNWAY (<i>number</i>), INTERSECTION (<i>name of intersection</i>)
ATC-initiated intersection take-off	ADVISE ABLE TO DEPART FROM RUNWAY (<i>number</i>), INTERSECTION (<i>name of intersection</i>)
Advising reduced take-off run available	REDUCED TAKE-OFF RUN AVAILABLE RUNWAY (<i>number</i>), FROM INTERSECTION (<i>name of intersection</i>), (<i>distance in metres</i>)
Issuing multiple line-up instruction	LINE UP AND WAIT RUNWAY (<i>number</i>), INTERSECTION (<i>name of intersection</i>), (<i>essential traffic information</i>)
Request for a visual departure	*REQUEST VISUAL DEPARTURE [DIRECT] TO/UNTIL (<i>navaid, waypoint, altitude</i>)
ATS initiated visual departure	ADVISE ABLE TO ACCEPT VISUAL DEPARTURE [DIRECT] TO/UNTIL (<i>navaid, waypoint/altitude</i>)
Clearance for visual departure	VISUAL DEPARTURE RUNWAY (<i>number</i>) APPROVED, TURN LEFT/RIGHT [DIRECT] TO (<i>navaid, heading, waypoint</i>) [MAINTAIN VISUAL REFERENCE UNTIL (<i>altitude</i>)]
Read-back of visual departure clearance	*VISUAL DEPARTURE TO/UNTIL (<i>navaid, waypoint/altitude</i>)
* Denotes pilot transmission	

10.5 ATFM

<i>Circumstances</i>	<i>Phraseologies</i>
Calculated take-off time (CTOT) delivery resulting from a slot allocation message (SAM). (The CTOT shall be communicated to the pilot at the first contact with ATC.)	SLOT (<i>time</i>)
Change to CTOT resulting from a Slot Revision Message (SRM).	REVISED SLOT (<i>time</i>)
CTOT cancellation resulting from a Slot Cancellation Message (SLC).	SLOT CANCELLED, REPORT READY
Flight suspension until further notice (resulting from Flight Suspension Message (FLS)).	FLIGHT SUSPENDED UNTIL FURTHER NOTICE, DUE (<i>reason</i>)
Flight de-suspension resulting from a De-suspension Message (DES).	SUSPENSION CANCELLED, REPORT READY
Denial of start-up when requested too late to comply with the given CTOT.	UNABLE TO APPROVE START-UP CLEARANCE DUE SLOT EXPIRED, REQUEST A NEW SLOT
Denial of start-up when requested too early to comply with the given CTOT.	UNABLE TO APPROVE START-UP CLEARANCE DUE SLOT (<i>time</i>), REQUEST START-UP AT (<i>time</i>)

Chapter 11. SEARCH AND RESCUE

11.1 INTERNATIONAL GENERAL AVIATION (IGA)

(A6, Part II – Chapter 6; A6, Part III – Chapter 4)

11.1.1 General aviation aircraft operating over designated areas, land or sea, where search and rescue operations would be difficult, should:

- a) carry appropriate survival equipment; and
 - b) follow the routes or specified procedures if not equipped with two-way radio, except that under special circumstances, the appropriate authority may grant specific exemptions from this requirement.
-

Chapter 12. METEOROLOGY

12.1 AIRCRAFT OBSERVATIONS AND REPORTS

Nil.

Chapter 13. AERONAUTICAL INFORMATION SERVICES

13.1 NOTAM ADDRESSING AND DISTRIBUTION

13.1.1 In addition to the distribution to individual States, all NOTAM originated worldwide shall also be addressed to the European AIS Database (EAD) using the AFTN address EUECYIYN as destination address.

Note.— Bilateral addressing agreements between States remain unchanged.

13.1.2 The EAD shall ensure distribution of NOTAM to all relevant NOTAM Offices (NOF) within its area of responsibility (EAD Clients).

13.1.3 NOTAM originated by EAD Clients shall be channelled through the EAD system and therefore indicate the EAD AFTN origination address.

13.1.4 The EAD AFTN destination and origination addresses are as follows:

Type of message	EAD destination address	EAD origination address (where applicable)
NOTAM	EUECYIYN	EUECYIYN
SNOWTAM	EUECYIYS	EUECYIYN
ASHTAM	EUECYIYA	EUECYIYN
BIRDTAM	EUECYIYB	EUECYIYN
ATFM (ANM, AIM, CRAM)		EUECYIYN
Freetext	EUECYIYX	EUECYIYX
Request for: — repetition of NOTAM — original version of NOTAM — list of valid NOTAM	EUECYRYX	EUECYIYN
Reply message	EUECYRYX	EUECYIYN
<i>Note.— “Request for...” messages will be processed automatically by the EAD in case the standard request format is applied.</i>		

Note 1.— Detailed procedures and information applicable to the European AIS Database (EAD) is contained in the EUROCONTROL “EAD Operational User Handbook”.

Note 2.— BIRDTAM is not an official ICAO term. BIRDTAM is an acronym for AFTN messages originated by military services based on a NATO Standard to provide information about bird strike risk/warning particularly in lower level flying areas. The EAD covers those messages for specific military clients.

Note 3.— ATFM includes Air Traffic Flow Management messages such as ANM (ATFM Notification Message), AIM (ATFM Information Message) and CRAM (Conditional Route Availability Message).

13.2 AERONAUTICAL CHART INFORMATION

13.2.1 Visual procedures

13.2.1.1 Information essential for the conduct of visual departures and visual approaches (e.g. significant obstacles, topographical and cultural features), including any specific limitations as prescribed by the appropriate authority (e.g. designated airspace, recommended tracks) shall be displayed on the visual approach chart and standard instrument departure (SID) chart or standard instrument arrival (STAR) chart, as appropriate.

MIDDLE EAST/ASIA (MID/ASIA) REGIONAL SUPPLEMENTARY PROCEDURES

These procedures are supplementary to the provisions contained in Annex 2, Annex 6 (Part II), Annex 11, PANS-ATM (Doc 4444) and PANS-OPS (Doc 8168). The area of application of the MID/ASIA Regional Supplementary Procedures is included on the Index to Application of Supplementary Procedures chart.

TABLE OF CONTENTS

	<i>Chapter</i>	<i>Page</i>
Flight Rules	1	MID/ASIA 1-1
Flight Plans	2	MID/ASIA 2-1
Communications	3	MID/ASIA 3-1
Navigation	4	MID/ASIA 4-1
Surveillance	5	MID/ASIA 5-1
Air Traffic Services	6	MID/ASIA 6-1
Safety Monitoring	7	MID/ASIA 7-1
Air Traffic Flow Management	8	MID/ASIA 8-1
Special Procedures	9	MID/ASIA 9-1
Phraseology	10	MID/ASIA 10-1
Search and Rescue	11	MID/ASIA 11-1
Meteorology	12	MID/ASIA 12-1
Aeronautical Information Services	13	MID/ASIA 13-1

Chapter 1. FLIGHT RULES

1.1 VISUAL FLIGHT RULES (VFR)

(A2 – Chapter 4)

1.1.1 Special application

1.1.1.1 VFR flights to be operated in specified portions of terminal control areas (TMAs) of selected aerodromes serving international flights shall:

- a) have two-way radio communications;
- b) obtain clearance from the appropriate ATC unit; and
- c) report positions, as required.

Note.— The phrase “specified portions of terminal control areas” is intended to signify at least those portions of the TMA used by international IFR flights in association with approach, holding, departure and noise abatement procedures.

1.2 INSTRUMENT FLIGHT RULES (IFR)

(A2 – Chapters 2 and 5)

Note.— Annex 2, 2.2, permits a flight to operate using either instrument flight rules or visual flight rules when operated in visual meteorological conditions subject to the limitations listed in Chapter 4 of the Annex. The following indicates certain additional restrictions.

1.2.1 Special application

1.2.1.1 Flights shall be conducted in accordance with instrument flight rules when operated:

- a) more than 185 km (100 NM) seaward from the shoreline within controlled airspace; or
- b) above flight level (FL) 150.

1.2.2 Flight level changes

Nil.

1.3 AIR TRAFFIC ADVISORY SERVICE

(P-ATM – Chapter 9)

Note.— The PANS-ATM leaves it to the discretion of the pilot whether or not to obtain air traffic advisory service where available. Obtaining air traffic advisory service is obligatory, however, when operating in Class F airspace.

1.3.1 All IFR flights shall comply with the procedures for air traffic advisory service when operating in Class F airspace.

Chapter 2. FLIGHT PLANS

2.1 CONTENT – GENERAL

(A2 – Chapter 3; P-ATM – Chapter 4 and Appendix 2)

2.1.1 Date of flight

Nil.

2.1.2 Area navigation (RNAV) specifications

2.1.2.1 State aircraft operating in the ICAO MID Region

2.1.2.1.1 Operators of State aircraft not equipped with RNAV equipment meeting RNP 5 shall not insert the designator “S” or “R” in Item 10 of the flight plan.

2.1.2.1.2 Since such flights require special handling by air traffic control, “STS/NONRNAV” shall be inserted in Item 18 of the flight plan.

2.1.3 Required navigation performance (RNP) specifications

2.1.3.1 The letter R shall be inserted in Item 10 (Equipment) of the flight plan to indicate the aircraft meets the RNP type prescribed, has been appropriately approved and can comply with all conditions of that approval.

2.1.3.2 Operators of aircraft fitted with RNAV having a navigation accuracy meeting RNP 5 shall insert the designator “R” in Item 10 of the flight plan for operation in the ICAO MID Region, as specified in 4.1.1.5.3.

2.1.4 Minimum navigation performance specifications (MNPS)

Nil.

2.1.5 Reduced vertical separation minimum (RVSM) approved aircraft

2.1.5.1 The letter W shall be inserted in Item 10 (Equipment) of the flight plan if the aircraft and operator have received RVSM State approval, regardless of the requested flight level. The aircraft registration shall be inserted in Item 18 of the flight plan.

2.1.6 Non-RVSM-approved aircraft

Nil.

2.1.7 Non-RVSM-approved State aircraft

Nil.

2.1.8 Indication of 8.33 kHz channel spacing capability

Nil.

2.1.9 Route

Nil.

2.1.10 Estimated times

Nil.

2.1.11 Mach number

2.1.11.1 For turbo-jet aircraft intending to operate within airspace and on air routes to which longitudinal separation minima utilizing Mach number technique will be applied, the planned true Mach number shall be specified in Item 15 of the flight plan.

2.1.12 Alternative flight level

Nil.

2.1.13 Special handling (STS)

Nil.

2.2 CONTENT – AIR TRAFFIC FLOW MANAGEMENT (ATFM)**2.2.1 Runway visual range (RVR)**

Nil.

2.2.2 Flight plan addressing and distribution

Nil.

2.2.3 Slot allocation exemptions

Nil.

2.3 SUBMISSION

2.3.1 General

Nil.

2.3.2 Amendments

Nil.

2.4 REPETITIVE FLIGHT PLANS (RPLs)

Nil.

Chapter 3. COMMUNICATIONS

3.1 AIR-GROUND COMMUNICATIONS AND IN-FLIGHT REPORTING

3.1.1 Communications equipment

Nil.

3.1.2 Continuous listening watch in uncontrolled airspace

(A2 – Chapters 3 and 5; P-ATM – Chapter 4)

3.1.2.1 All VFR flights, and IFR flights outside controlled airspace, shall maintain a listening watch on the frequency where flight information service is provided and report position unless otherwise authorized by the State overflown.

3.1.3 Position reports

(A2 – Chapters 3 and 5; P-ATM – Chapter 4)

3.1.3.1 States should establish reporting points at locations fulfilling operational requirements as set forth in Annex 11, 2.13.1, 2.13.3 and Appendix 2. Except where operational considerations dictate otherwise, those points should be located at intervals of 5 degrees of latitude or longitude (latitude if the route is predominantly north-south, longitude if east-west).

3.1.3.2 Aircraft traversing 10 degrees of latitude or longitude in 1 hour and 20 minutes or less should normally be required to report only at 10-degree intervals. Slower aircraft should normally be required to report at 5-degree intervals.

3.1.3.3 Within the Fukuoka (excluding the area west of a line 185 km (100 NM) seaward from the eastern coastline of Japan), Incheon, Manila (East of the Philippines) and Taipei flight information regions, flights shall provide position reports.

3.1.3.4 Verbal position reports shall be identified by the spoken word “position” transmitted immediately before or after the aircraft call sign/identification.

3.1.3.5 The position of the aircraft shall be transmitted in reference to a reporting point name, name-code designator or, if not named:

a) for flights operating in a predominantly east-west direction:

- 1) latitude in degrees and minutes; and
- 2) longitude in degrees only;

b) for flights operating in a predominantly north-south direction:

- 1) latitude in degrees only; and
- 2) longitude in degrees and minutes.

3.1.3.6 The time at which the aircraft is over the reporting point shall be transmitted in four digits, giving both the hour and the minutes.

3.1.3.7 Estimated time over next position shall be expressed in four digits.

3.1.4 Abbreviated position reports

Nil.

3.1.5 Read-back of VHF channels

Nil.

3.2 MANDATORY CARRIAGE OF 8.33 KHZ CHANNEL SPACING CAPABLE RADIO EQUIPMENT

Nil.

3.3 CONTROLLER-PILOT DATA LINK COMMUNICATIONS (CPDLC)

Nil.

3.4 SATELLITE VOICE COMMUNICATIONS (SATCOM)

Nil.

3.5 AERONAUTICAL MOBILE SERVICE

3.5.1 Selective calling (SELCAL)

Nil.

3.5.2 HF operations

Nil.

3.6 AERONAUTICAL FIXED SERVICE

3.6.1 AFTN rationalization

3.6.1.1 To support data communication requirements and to provide needed data integrity and minimal transit time, the CCITT X.25 protocol should be used between AFTN COM Centres in the Asia Region.

3.7 RADIO CHANNELS/FREQUENCIES

Nil.

Chapter 4. NAVIGATION

4.1 PERFORMANCE-BASED NAVIGATION (PBN)

Note.—As the Middle East and Asia (MID/ASIA) Regions transition to PBN as contained in the Performance-based Navigation Manual (Doc 9613), the contents of 4.1 will be amended.*

4.1.1 Area navigation (RNAV) specifications

4.1.1.1 RNAV 10 (RNP 10)

Note.—RNAV 10 retains the RNP 10 designation, as specified in the Performance-based Navigation Manual (Doc 9613), 1.2.3.5.*

Area of applicability

4.1.1.1.1 For flights on designated controlled oceanic routes or areas within the Auckland Oceanic, Brisbane, Fukuoka, Honiara, Melbourne, Nauru, New Zealand and Port Moresby FIRs, a lateral separation minimum of 93 km (50 NM) may be applied.

4.1.1.1.2 For flights on designated controlled oceanic routes or areas within the Auckland Oceanic, Brisbane, Fukuoka, Honiara, Melbourne, Nauru, New Zealand and Port Moresby FIRs, a longitudinal separation minimum of 93 km (50 NM) derived by RNAV may be applied between RNAV-equipped aircraft approved to RNP 10 or better, in accordance with the provisions of the PANS-ATM, 5.4.2.6.

Means of compliance

4.1.1.1.3 For application of 4.1.1.1.1 and 4.1.1.1.2, the aircraft and the operator must have been approved by the State of Registry or the State of the Operator, as appropriate, to meet the following requirements (or equivalent):

- a) aircraft navigation performance shall be such that the standard deviation of lateral track errors shall be less than 8.7 km (4.7 NM) (or the aircraft approved to RNP 10); and
- b) operator programmes shall be established to mitigate the occurrence of large navigational errors due to equipment malfunction or operational error:
 - 1) operator in-flight operating drills shall include mandatory navigation cross-checking procedures to identify navigation errors in sufficient time to prevent aircraft from inadvertent deviation from ATC-cleared route; and
 - 2) the operator shall establish programmes to provide for the continued airworthiness of aircraft navigation systems necessary to navigate to the degree of accuracy required.

* In preparation.

4.1.1.2 RNAV 5

Nil.

4.1.1.3 RNAV 2

Nil.

4.1.1.4 RNAV 1

Nil.

4.1.1.5 Pre-PBN navigation specifications**4.1.1.5.1 RNP 12.6***Area of applicability*

4.1.1.5.1.1 For flights on controlled oceanic routes across the Tasman Sea within the Auckland Oceanic, Brisbane, Melbourne and New Zealand FIRs and for flights across the South China Sea within Bangkok, Hanoi, Ho Chi Minh, Hong Kong, Kota Kinabalu, Kuala Lumpur, Manila, Taipei and Singapore FIRs, the minimum lateral separation shall be 110 km (60 NM).

Means of compliance

4.1.1.5.1.2 For application of 4.1.1.5.1.1, aircraft must be RNAV-equipped and RNAV-approved using inertial navigation systems (INS) provided that:

- a) the INS is updated at least every 4.5 hours;
- b) the standard deviation of lateral track errors shall be less than 11.7 km (6.3 NM);
- c) the proportion of the total flight time spent by aircraft 55.5 km (30 NM) or more off the cleared track shall be less than 5.3×10^{-4} ; and
- d) the proportion of the total flight time spent by aircraft between 93 and 130 km (50 and 70 NM) off the cleared track shall be less than 13×10^{-5} .

Such navigation performance capability shall be verified by the State of Registry or the State of the Operator, as appropriate. Lateral separation of 185 km (100 NM), or greater if required, shall be used if the track-keeping capability of the aircraft has been reduced for any reason.

Note.— The navigation performance accuracy contained in b) is considered to be comparable to RNP 12.6 or better.

4.1.1.5.1.3 When granting approval for operations as indicated in 4.1.1.5.1.1, either the State of Registry or the State of the Operator shall ensure that in-flight operating drills include mandatory navigation cross-checking procedures which will identify navigation errors in sufficient time to prevent the aircraft from inadvertently deviating from the ATC-cleared route.

4.1.1.5.2 *Composite*
(A11 – Chapter 3)

Area of applicability

4.1.1.5.2.1 For aircraft operating at or above FL 290 within the flexible Pacific Organized Track Systems (PACOTS), North Pacific (NOPAC) route system between the United States and Japan and the route system between Hawaii and the west coast of the United States, within the Fukuoka, Oakland Oceanic and Anchorage Oceanic FIRs, composite separation consisting of a combination of at least 93 km (50 NM) lateral and 300 m (1 000 ft) vertical separation may be applied.

4.1.1.5.3 *RNP 5*

Area of applicability

4.1.1.5.3.1 Within the Amman, Baghdad, Bahrain, Beirut, Cairo, Damascus, Jeddah, Kabul, Kuwait, Muscat, Sana'a, Tehran, Tel Aviv and Emirates FIRs, only RNAV-equipped aircraft having a navigation accuracy meeting RNP 5 may plan for operations under IFR on those ATS routes and within those level bands which have been specified as requiring RNP 5 in the relevant State AIP or NOTAM.

Means of compliance
(P-ATM – Chapter 5)

4.1.1.5.3.2 Conformance to the navigation requirement shall be verified by the State of Registry or the State of the Operator, as appropriate.

Note.— Guidance material concerning navigation accuracy requirements is contained in the Performance-based Navigation Manual (Doc 9613), Volume II.

4.1.1.5.3.3 Aircraft operating under IFR on designated RNP 5 routes shall be equipped with, as a minimum, RNAV equipment meeting the following requirements:

- a) a system use accuracy equal to, or better than, 4.6 km (2.5 NM) for one standard deviation, with a 95 per cent containment value of ± 9.26 km (± 5 NM), thereby meeting the accuracy requirements for RNP 5; and
- b) an average continuity of service of 99.99 per cent of flight time.

4.1.1.5.3.4 Until such time as VHF omnidirectional radio range (VOR) or distance-measuring equipment (DME) facilities cease to be available, the carriage of a single RNAV system having a navigation accuracy meeting RNP 5 but not meeting the above continuity of service requirements may be approved for RNAV operations if the aircraft is also carrying VOR and DME equipment.

4.1.1.5.3.5 The cross-track distances required to achieve a given level of containment for RNP 5 routes shall be as specified in the following table:

<i>Percentage containment for RNP 5</i>						
	95	96	97	98	99	99.5
km	9.3	10.2	10.2	11.1	12.0	13.9
NM	5.0	5.5	5.5	6.0	6.5	7.5

4.1.1.5.3.6 Correct operation of the aircraft RNAV system shall be verified before joining and during operation on an RNP 5 route. This shall include confirmation that:

- a) the routing is in accordance with the clearance; and
- b) the aircraft navigation accuracy meets RNP 5.

4.1.2 Required navigation performance (RNP) specifications

4.1.2.1 RNP 4

Area of applicability

4.1.2.1.1 For flights on designated controlled oceanic routes or areas within the Auckland Oceanic, Brisbane, Fukuoka, Honiara, Melbourne, Nauru, New Zealand and Port Moresby FIRs, a lateral separation minimum of 55.5 km (30 NM) may be applied.

4.1.2.1.2 For flights on designated controlled oceanic routes or areas within the Auckland Oceanic, Brisbane, Fukuoka, Honiara, Melbourne, Nauru, New Zealand and Port Moresby FIRs, a longitudinal separation minimum of 55.5 km (30 NM) derived by RNAV may be applied between RNAV-equipped aircraft approved to RNP 4 or better, in accordance with the provisions of the PANS-ATM, 5.4.2.6.

4.1.2.2 Basic RNP 1

Nil.

4.1.2.3 Advanced RNP 1

Nil.

4.2 REDUCED VERTICAL SEPARATION MINIMUM (RVSM)

Area of applicability

4.2.1 RVSM shall be applicable in that volume of airspace between FL 290 and FL 410 inclusive in the following FIRs:

Amman, Auckland Oceanic, Bahrain, Bangkok, Beijing, Beirut, Brisbane, Cairo, Chennai, Colombo, Damascus, Delhi, Dhaka, Emirates, Fukuoka, Guangzhou, Hanoi, Ho Chi Minh, Hong Kong, Honiara, Incheon, Jakarta, Jeddah, Karachi, Kathmandu, Kolkata, Kota Kinabalu, Kuala Lumpur, Kunming, Kuwait, Lahore, Lanzhou, Male, Manila, Melbourne, Mumbai, Muscat, Nauru, New Zealand, Phnom Penh, Port Moresby, Sana'a, Sanya, Shanghai, Shenyang, Singapore, Taipei, Tehran, Ujung Pandang, Urumqi, Vientiane, Wuhan and Yangon.

Means of compliance

(A2 – Chapter 5 and Appendix 3; A6, Part I – Chapters 3, 4 and 7;
A6, Part II – Chapters 3 and 7; A8, Part IIIA – Chapter 8; A11 – Chapter 2)

4.2.2 Operators intending to conduct flights within the MID/ASIA Region where RVSM is applied shall require an RVSM approval either from the State of Registry or the State of the Operator. The State of Registry or the State of the Operator, as appropriate, should verify that the height-keeping performance capability of approved aircraft meets the requirements specified in Annex 6, Parts I and II.

Chapter 5. SURVEILLANCE

(P-OPS, Vol. I; P-ATM – Chapter 8)

5.1 SECONDARY SURVEILLANCE RADAR (SSR)

Note.— The procedures provided below shall be applicable in all the flight information regions (FIRs)/upper flight information regions (UIRs) of Kazakhstan, Kyrgyzstan, the Russian Federation, Tajikistan, Turkmenistan and Uzbekistan located in the area of application of the MID/ASIA Regional Supplementary Procedures (Index to Application of Supplementary Procedures chart refers).

5.1.1 Carriage of pressure-altitude reporting SSR transponders

5.1.1.1 All aircraft shall be equipped with a pressure-altitude reporting transponder which operates in accordance with the relevant provisions of Annex 10.

5.1.2 Code allocation methodology

Nil.

5.1.3 Assignment of SSR codes

5.1.3.1 All aircraft engaged in international flight shall be assigned an appropriate SSR code by the initial ATS unit at the beginning of the flight if it is to be conducted under instrument flight rules. The code shall be assigned from within the code block(s) allocated to the area control centre (ACC)/flight information centre of the originating FIR and shall be retained and used by the aircraft until its arrival at destination, with modifications as provided for in 5.1.3.2 and 5.1.3.3.

5.1.3.2 For an aircraft entering the area under consideration via various “peripheral” FIRs, the ACC/flight information centre concerned shall assign a code in one of the following two ways. If the aircraft concerned is going to land in the “peripheral” FIR, a domestic code will be assigned. If the aircraft is going to overfly the “peripheral” FIR, an international code shall be assigned from the code set allocated to that FIR.

Note 1.— Diversion. Whenever a diversion occurs that will take the aircraft into another FIR, advance coordination with the ACC/flight information centre having jurisdiction over that FIR shall be effected to avoid code conflict. This is of particular importance if the diverted flight returns towards its point of departure since the code used by the flight concerned may already have been reassigned to another flight.

Note 2.— Peripheral FIRs. For those FIRs forming the boundary of the ASIA Region and in which domestic codes are assigned to flights originating outside the region and terminating in the peripheral FIR, international codes are assigned to flights originating outside the region and terminating in other FIRs within the area under consideration.

5.1.3.3 If an aircraft is:

- a) traversing non-SSR areas or landing in non-SSR areas, the ACC/flight information centre will include the assigned four-digit code as part of the transfer message.

- b) departing from a non-SSR area, the aircraft shall be assigned a four-digit code upon departure, and the ACC/flight information centre shall include the code in the departure and transfer messages.

5.1.3.4 The ATS unit serving the aerodrome where the flight originates shall include the assigned four-digit code in the departure message sent to each addressee of the flight plan.

5.1.3.5 The ACC/flight information centre serving the FIR where the flight originates shall include the assigned four-digit code in the transfer message to the next ACC/flight information centre. The ACCs/flight information centres of subsequent FIRs overflown by the aircraft concerned shall ensure that the code is included in the transfer messages.

Note.— This is particularly important in the case of 5.1.3.3 a).

5.1.4 Operation of pressure-altitude reporting SSR transponders

5.1.4.1 When it is necessary to stop identification friend/foe (IFF)/selective identification feature (SIF) transponders from replying on Mode A/3, pilots shall be requested to switch off Mode 3. In no case shall they be requested to switch to STANDBY, since operation of the STANDBY switch stops the IFF/SIF transponders from replying on **all** modes.

Note.— Some military aircraft are required to operate IFF transponders for non-air traffic control purposes simultaneously with and independently of their operation in Mode A/3 for air traffic control purposes.

5.1.4.2 The “all codes” setting shall be used when it is desired to display for air traffic control purposes all aircraft in a specified area that are equipped with SSR or IFF/SIF transponders; the “all aircraft” setting shall be used when it is desired to also display aircraft equipped with basic IFF transponders.

5.1.5 Monitoring of SSR-derived information

5.1.5.1 SSR-derived information shall be checked by use of special monitoring devices or by correlation of an identified primary radar blip with the appropriate SSR response.

5.2 SSR MODE S

5.2.1 Carriage and operation of SSR Mode S

Nil.

5.2.2 Transition between Mode A/C and Mode S

Nil.

5.3 AIRBORNE COLLISION AVOIDANCE SYSTEMS (ACAS)

5.3.1 Carriage and operation of ACAS II

Nil.

5.4 AUTOMATIC DEPENDENT SURVEILLANCE – CONTRACT (ADS-C)

Nil.

5.5 AUTOMATIC DEPENDENT SURVEILLANCE – BROADCAST (ADS-B)

Nil.

Chapter 6. AIR TRAFFIC SERVICES

6.1 AIR TRAFFIC CONTROL (ATC) CLEARANCES

6.1.1 Content

Nil.

6.1.2 Adherence

(A2 – Chapter 3)

6.1.2.1 If an aircraft on a long over-water flight has inadvertently deviated from the route specified in its ATC clearance, it shall forthwith take action to regain such route within 370 km (200 NM) from the position at which the deviation was observed.

6.2 SEPARATION

6.2.1 Lateral

(A11 – Attachment B; P-ATM – Chapters 5 and 15)

6.2.1.1 Except as provided for in 6.2.1.2 and 6.2.1.5, the minimum lateral separation shall be 185 km (100 NM), for flights on controlled oceanic routes, except where aircraft are transiting into an airspace with a larger lateral minimum than the airspace being exited provided that:

- a) the smaller separation minimum exists;
- b) flight paths diverge by 15 degrees or more until the larger minimum is established; and
- c) it is possible to ensure, by means approved by the appropriate ATS authority, that aircraft have the navigation capability necessary to ensure accurate track guidance.

6.2.1.2 The minimum lateral separation shall be 110 km (60 NM) between aircraft meeting the provisions in 4.1.1.5.1.

6.2.1.3 The minimum lateral separation shall be 93 km (50 NM) between aircraft meeting the provisions in 4.1.1.1.

6.2.1.4 The minimum lateral separation shall be 55.5 km (30 NM) between aircraft meeting the provisions in 4.1.2.1, provided:

- a) the aircraft are approved by the State of Registry or the State of the Operator to RNP 4;
- b) direct controller-pilot voice communications or controller-pilot data link communications (CPDLC) are maintained;

- c) surveillance is maintained using an automatic dependent surveillance (ADS) system; and
- d) an ADS lateral deviation change event contract is established, with a lateral deviation threshold of 9.3 km (5 NM).

6.2.1.5 Lower minima as detailed in 5.4.1.2 of the PANS-ATM may be applied, or further reduced in accordance with 5.11 of the PANS-ATM, when the conditions specified in the relevant PANS-ATM provisions are met.

6.2.2 Longitudinal

(P-ATM – Chapter 5)

6.2.2.1 Except as provided for in 6.2.2.2, the minimum longitudinal separation between turbo-jet aircraft operating within the Auckland Oceanic, Bangkok, Brisbane, Chennai, Colombo, Delhi, Dhaka, Fukuoka, Hanoi, Ho Chi Minh, Hong Kong, Honiara, Incheon, Jakarta, Karachi, Kolkata, Kota Kinabalu, Kuala Lumpur, Lahore, Madras, Male, Manila, Melbourne, Mumbai, Muscat, Nauru, New Zealand, Phnom Penh, Port Moresby, Singapore, Taipei, Tehran, Ujung Pandang, Vientiane and Yangon FIRs shall be in accordance with the PANS-ATM, 5.4.2.4 or 5.4.2.5.

6.2.2.2 The minimum longitudinal separation shall be 93 km (50 NM) derived by RNAV between aircraft meeting the provisions in 4.1.1.1.

Note.— The provision of the PANS-ATM, 5.4.2.6.1 to 5.4.2.6.3, apply in all cases. Where ADS is not available, the provisions of the PANS-ATM, 5.4.6.3, apply. Where ADS is available, the provisions of the PANS-ATM, 5.4.6.4, apply.

6.2.2.3 The minimum longitudinal separation shall be 55.5 km (30 NM) between aircraft meeting the provisions in 4.1.2.1.

Note.— ADS is required for the application of this minimum; therefore, the applicable provisions will be those of the PANS-ATM, 5.4.2.6.1 to 5.4.2.6.3, and 5.4.2.6.4.

6.2.3 Composite

6.2.3.1 Composite separation consisting of a combination of at least 93 km (50 NM) lateral and 300 m (1 000 ft) vertical separation may be applied between aircraft meeting the provisions in 4.1.1.5.2.

6.2.3.2 The type of separation in 6.2.3.1 may be applied between aircraft operating in the same direction or opposite directions (see also 6.8).

6.2.4 Vertical

6.2.4.1 An RVSM of 300 m (1 000 ft) shall be applied between FL 290 and FL 410 inclusive for flights within the FIRs specified in 4.2.1.

6.2.4.2 The minimum separation in 6.2.4.1 shall only be applied between aircraft where those aircraft and the operator have been approved by the State of Registry or the State of the Operator, as appropriate, to conduct flights in RVSM airspace.

6.2.4.3 Aircraft that have not received RVSM State approval may be cleared to operate in airspace where RVSM may be applied in accordance with policy and procedures established by the State provided that 600 m (2 000 ft) vertical separation is applied.

6.2.5 Radar

Nil.

6.2.6 Reduction in separation minima

(A11 – Chapter 3; P-ATM – Chapter 5)

6.2.6.1 Where, circumstances permitting, separation minima lower than those specified in 6.2.1 and 6.2.2 will be applied in accordance with the PANS-ATM, appropriate information should be published in AIPs so that users of the airspace are fully aware of the portions of airspace where the reduced separation minima will be applied and of the navigation aids on which those minima are based.

6.2.7 Airspace reservations

Nil.

6.3 MINIMUM FLIGHT LEVEL

(P-ATM – Chapter 4; P-OPS, Vol. I)

6.3.1 Establishment

6.3.1.1 The lowest useable flight level shall be calculated from actual QNH, unless the pressure variation is so small that reference to climatological data is acceptable.

Note 1.— The lowest useable flight level will provide a terrain clearance of at least 300 m (1 000 ft).

Note 2.— MET Offices will inform ATS units when, in abnormal conditions, pressure goes below the minimum climatological value, in order that appropriate steps can be taken to cancel temporarily the use of the lowest flight level or levels that would not ensure the minimum terrain clearance.

6.3.1.2 Based on current and anticipated atmospheric pressure distribution, area control centres shall coordinate, when required, the lowest flight level to be used.

6.4 ATS ROUTES

6.4.1 Track systems

6.4.1.1 Flexible Pacific Organized Track Systems (PACOTS)

6.4.1.1.1 To optimize the use of airspace across the Northern, Central and South Pacific, flexible organized track systems may be established within the Fukuoka, Oakland Oceanic, Anchorage Oceanic, Nadi, Tahiti, Auckland Oceanic, Sydney, Brisbane and Port Moresby FIRs.

6.4.1.1.2 The ACCs providing air traffic service within the concerned FIRs shall provide information to users regarding the PACOTS tracks generated for use. The location of the tracks will depend on traffic demand, prevailing winds, significant weather and other relevant factors. Unless otherwise stated, tracks will apply at FL 290 and above.

6.4.1.1.3 PACOTS track messages to users specifying track details will be disseminated daily by one of the ACCs. Messages will be disseminated in a timely manner to accommodate the flight planning requirements of users. Any subsequent changes will be issued promptly. Pilots are expected to flight plan in accordance with the daily track message.

Note.— PACOTS guidelines containing detailed information on track generation, lateral track spacing, level assignment, position-reporting requirements and other relevant details shall be published in the AIPs or associated supplements of those States which utilize a flexible track system within their airspace or areas of responsibility.

6.4.2 RNAV

Nil.

6.5 AERODROME OPERATIONS

6.5.1 Area of applicability

Nil.

6.5.2 Intersection take-off

Nil.

6.5.3 Multiple line-ups on the same runway

Nil.

6.5.4 Visual departures

Nil.

6.5.5 Visual approaches

Nil.

6.6 RNAV PROCEDURES

6.6.1 General

Nil.

6.6.2 En route

Nil.

6.6.3 Terminal

Nil.

6.6.4 State aircraft

Nil.

6.7 RNP PROCEDURES**6.7.1 General**

Nil.

6.7.2 En route

Nil.

6.7.3 Terminal

Nil.

6.7.4 State aircraft**6.7.4.1 Operations in the ICAO MID Region**

6.7.4.1.1 Within TMAs, State aircraft not equipped with RNAV approved for RNP 5 should be routed via non-RNAV SIDs and STARs.

6.7.4.1.2 Such aircraft operating en-route should be routed via VOR/DME-defined ATS routes.

6.7.4.1.3 When the above procedures cannot be applied, the ATC unit shall provide the aircraft with radar vectors until the aircraft is capable of resuming its own navigation.

6.8 COMPOSITE PROCEDURES

6.8.1 When composite separation is used, the following procedures apply:

- a) An aircraft may be cleared to join an outer route of the system at an entry point other than the normal entry point provided:
 - 1) longitudinal or non-composite vertical separation exists between that aircraft and any other on that route; and
 - 2) composite separation exists between that aircraft and any other on the next adjacent route.
- b) An aircraft may be cleared to leave an outer route of the system at an exit point other than the normal exit point provided its course diverges so that the lateral spacing from the route increases until longitudinal or non-composite lateral or non-composite vertical separation exists between that aircraft and any other aircraft in the system.
- c) An aircraft may be cleared to change from one route to an adjacent route in the system provided:
 - 1) longitudinal or non-composite vertical separation exists between that aircraft and any other aircraft on the route being vacated until that aircraft is established on the route to which it is proceeding;
 - 2) longitudinal or non-composite vertical separation exists between that aircraft and any other aircraft on the route to which that aircraft is proceeding; and
 - 3) composite separation exists between that aircraft and any other aircraft on the next adjacent route.
- d) An aircraft may be cleared to cross the system provided longitudinal or non-composite lateral or non-composite vertical separation exists between that aircraft and any other aircraft in the system.
- e) An aircraft may be cleared to change altitude on a route if longitudinal or non-composite vertical separation exists between that aircraft and any other aircraft on that route and regardless of any other aircraft on adjacent routes.

Note.— Non-composite separation is separation in accordance with the minima in 6.2.1 and 6.2.2 and those in the PANS-ATM, 5.3.2.

6.9 MNPS PROCEDURES

Nil.

6.10 RVSM PROCEDURES

6.10.1 General

Nil.

6.10.2 Transition to/from RVSM airspace

Nil.

6.11 ATS COORDINATION

6.11.1 Between units providing area control services

(A11 – Chapter 3; P-ATM – Chapters 10 and 11)

6.11.1.1 If a flight should enter an adjacent area, information concerning any revision of the estimate of three minutes or more shall be forwarded to the adjacent area control centre normally by telephone.

6.11.2 RNAV

Aircraft experiencing degradation or failure of RNAV — computer-assisted coordination of estimate

6.11.2.1 In the case of automated messages not containing the information provided in Item 18 of the flight plan, the sending ATC unit shall inform the receiving ATC by supplementing the ACT message verbally with the phrase “RNAV OUT OF SERVICE” after the call sign of the aircraft concerned.

Aircraft experiencing degradation or failure of RNAV — verbal coordination of estimate

6.11.2.2 When a verbal coordination process is being used, the sending ATC unit shall include the phrase “RNAV OUT OF SERVICE” at the end of the message.

State aircraft not equipped with RNAV — ICAO MID Region

6.11.2.3 In the case of automated messages not containing the information provided in Item 18 of the flight plan, the sending ATC unit shall inform the receiving ATC unit by supplementing the ACT message verbally with the phrase “NEGATIVE RNAV” after the call sign of the aircraft concerned.

6.11.2.4 When a verbal coordination process is being used, the sending ATC unit shall include the phrase “NEGATIVE RNAV” at the end of the message.

6.11.3 RNP

Nil.

6.11.4 RVSM

Nil.

6.11.5 SSR codes

Nil.

6.12 ATS MESSAGES**6.12.1 Flight plan and departure**

Nil.

6.12.2 Arrival

Nil.

6.12.3 Boundary estimates

Nil.

6.12.4 Computer-assisted coordination

Nil.

6.13 FLIGHT INFORMATION SERVICE (FIS)**6.13.1 Automatic terminal information services (ATIS)**

Nil.

6.13.2 SIGMETs

(P-ATM – Chapter 9)

6.13.2.1 Transmission of SIGMET information to aircraft shall be at the initiative of the appropriate ATS unit, by the preferred method of directed transmission followed by acknowledgement, or by a general call when the number of aircraft would render the preferred method impracticable.

6.13.2.2 SIGMET information passed to aircraft shall cover a portion of the route up to two hours' flying time ahead of the aircraft.

6.13.3 Special air-reports

Nil.

6.13.4 Amended aerodrome forecasts

(P-ATM – Chapter 9)

6.13.4.1 Amended aerodrome forecasts shall be passed to aircraft within 60 minutes from the aerodrome of destination, unless the information has been made available through other means.

6.13.5 Landing forecasts

Nil.

6.14 ALERTING SERVICE

Nil.

Chapter 7. SAFETY MONITORING

7.1 STRATEGIC LATERAL OFFSET PROCEDURES (SLOP)

Nil.

7.2 AIRSPACE MONITORING

7.2.1 General

Nil.

7.2.2 RNAV

Nil.

7.2.3 RNP

7.2.3.1 The following criteria are to be used in the operational assessment of airspace system safety on routes or areas where 93 km (50 NM) separation is applied:

- a) the proportion of the total flight time spent by aircraft 46 km (25 NM) or more off the cleared track shall be less than 7.0×10^{-4} ; and
- b) the proportion of the total flight time spent by aircraft between 74 and 110 km (40 and 60 NM) off the cleared track shall be less than 4.1×10^{-5} .

7.2.3.2 Prior to implementation of 55.5 km (30 NM) separation, States shall undertake a system verification of sufficient duration and integrity to demonstrate that the maximum acceptable rate of lateral deviations greater than or equal to 27.8 km (15 NM) will not exceed those rates listed in Table B-1 in Annex 11, Attachment B. The verification should be conducted after the minimum navigation, communications and surveillance requirements listed in Chapter 4 have been met.

7.2.3.3 Following implementation of 55.5 km (30 NM) separation, a monitoring programme shall be established to periodically verify that the system's actual rate of lateral deviations greater than or equal to 27.8 km (15 NM) does not exceed the maximum prescribed in Table B-1 in Annex 11, Attachment B.

7.2.4 RVSM

7.2.4.1 The following criteria shall be used in the operational assessment of airspace system safety: the total vertical error (TVE), which is the difference between the geometric height of the aircraft and the geometric height of the flight level to which it is assigned, is required to be such that:

- a) the probability that TVE equal to or greater than 91 m (300 ft) in magnitude is equal to or less than 2×10^{-3} ;
- b) the probability that TVE equal to or greater than 152 m (500 ft) in magnitude is equal to or less than 5×10^{-6} ;
- c) the probability that TVE equal to or greater than 200 m (650 ft) in magnitude is equal to or less than 1.4×10^{-6} ;
- d) the probability that TVE between 290 m and 320 m (950 ft and 1 050 ft), inclusive, in magnitude is equal to or less than 1.7×10^{-7} ; and
- e) the proportion of time that aircraft spend at incorrect flight levels, 300 m (1 000 ft), or multiples thereof, away from assigned flight levels is equal to or less than 7.1×10^{-7} .

Note.— Guidance material regarding the initial achievement and continued maintenance of the height-keeping performance in 4.2.2 is contained in the Guidance Material on the Implementation of a 300 m (1 000 ft) Vertical Separation Minimum (VSM) for Application in the Airspace of the Asia/Pacific Region.

7.2.4.2 Except for the airspace forming part of the MID RVSM area, where a TLS of 3.75×10^{-9} fatal accidents per aircraft flight hour due to all causes of risk in the vertical dimension has been specified, the application of RVSM in the other airspace designated in 4.2.1 shall meet a TLS of 5×10^{-9} fatal accidents per aircraft flight hour due to all causes of risk in the vertical dimension.

Note.— The rationale for choosing a TLS value of 3.75×10^{-9} fatal accidents (1.25×10^{-9} for technical risk and 2.5×10^{-9} for operational risk) per aircraft flight hour due to all causes of risk in the vertical dimension in the MID RVSM airspace is to ensure that the TLS value of 2.5×10^{-9} for technical risk will not be infringed with future projected traffic growths and the system remains safe for a period of at least 12 years.

7.2.4.3 Adequate monitoring of flight operations in the Asia and Pacific RVSM airspace shall be conducted to assist in the assessment of continuing compliance of aircraft with the height-keeping capabilities in 4.2.2. Monitoring shall include assessment of other sources of risk to ensure that the TLS specified in 7.2.4.2 is not exceeded.

Note.— Details of the policy and procedures for monitoring established by the Asia/Pacific Air Navigation Planning and Implementation Regional Group and the Middle East Planning and Implementation Regional Group (MIDANPIRG) are contained in the Guidance Material on the Implementation of a 300 m (1 000 ft) Vertical Separation Minimum (VSM) for Application in the Airspace of the Asia/Pacific Region and the MID Region ATC Manual and OPS/AIR Manual.

Chapter 8. AIR TRAFFIC FLOW MANAGEMENT (ATFM)

8.1 PROVISION

Nil.

8.2 APPLICATION

Nil.

8.3 EXEMPTIONS FROM ATFM SLOT ALLOCATION

Nil.

8.4 DEPARTURE SLOT MONITORING

Nil.

8.5 PROMULGATION OF ATFM MEASURES

8.5.1 Strategic ATFM measures

Nil.

8.5.2 Amendments to promulgated strategic ATFM measures

Nil.

8.5.3 ATFM circulars and information

Nil.

8.5.4 Pre-flight information bulletin (PIB)

Nil.

8.5.5 Query procedures

Nil.

Chapter 9. SPECIAL PROCEDURES

9.1 EMERGENCY DESCENT PROCEDURES

9.1.1 Action by the pilot-in-command

Nil.

9.1.2 Action by the ATS unit

Nil.

9.2 CONTINGENCY PROCEDURES INCLUDING TURN-BACKS

Nil.

9.3 AIR-GROUND COMMUNICATION FAILURE

9.3.1 The following procedures apply to aircraft operating in the oceanic airspace of the Auckland Oceanic, Brisbane, Fukuoka, Honiara, Manila, Melbourne, Port Moresby and Nauru FIRs. These procedures are intended to complement and not supersede State procedures/regulations.

9.3.1.1 In the event of total loss of communication, an aircraft shall:

- a) try to re-establish communication by all other means;
- b) if all attempts to re-establish communication with ATC are unsuccessful:
 - 1) squawk 7600;
 - 2) if able, broadcast in the blind at suitable intervals: flight identification, flight level, aircraft position (including the ATS route designator or the track code) and intentions on the frequency in use, as well as on frequency 121.5 MHz (or, as a back-up, the VHF inter-pilot air-to-air frequency 123.45 MHz);
 - 3) watch for conflicting traffic both visually and by reference to airborne collision avoidance systems or traffic displays (if equipped);
 - 4) turn on all aircraft exterior lights (commensurate with appropriate operating limitations);
 - 5) maintain the last assigned speed and level for a period of *60 minutes* following the aircraft's failure to report its position over a compulsory reporting point (including ADS-C flights), and thereafter adjust speed and altitude in accordance with the filed flight plan;

Note.— In airspace where the strategic lateral offset procedures (SLOP) has been authorized, aircraft experiencing communication failure may also elect to initiate SLOP in accordance with State AIP, including an offset of 1.8 or 3.7 km (1 NM or 2 NM) right of track.

- 6) Upon exiting oceanic airspace, conform to the relevant State procedures and regulations.

9.3.1.2 In the event of lost communication, ATC shall maintain separation between the aircraft having the communication failure and other aircraft, based on the assumption that the aircraft having the communication failure will operate in accordance with the procedures in 9.3.1.1.

9.4 DEGRADATION OR FAILURE OF THE RNAV SYSTEM

9.4.1 Action by the pilot-in-command

9.4.1.1 For operations in the ICAO MID Region, when, as a result of a failure of the RNAV system or its degradation to below RNP 5, an aircraft is unable either to enter an ATS route designated as RNP 5 or to continue operations in accordance with the current air traffic control clearance, a revised clearance shall, whenever possible, be requested by the pilot.

9.4.1.2 Subsequent ATC action in respect of that aircraft will be dependent upon the nature of the reported failure and the overall traffic situation. Continued operation in accordance with the current ATC clearance may be possible in many situations. When this cannot be achieved, a revised clearance may be required to revert to VOR/DME.

9.4.2 Action by the ATS unit

9.4.2.1 For operations in the ICAO MID Region, when, as a result of a failure or degradation of the RNAV system, detected either before or after departure, the aircraft cannot meet the requirements of 4.1.1.5.3.3, the ATC procedures as specified in 6.11.2.1 and 6.11.2.2 are applicable.

9.5 LOSS OF VERTICAL NAVIGATION PERFORMANCE REQUIRED FOR RVSM

Note.— Applicable within Amman, Bahrain, Beirut, Cairo, Damascus, Emirates, Jeddah, Kuwait, Muscat (continental part), Sana'a (continental part) and Tehran FIRs. For Amman, Beirut, Cairo and Damascus, see the European SUPPs.

9.5.1 General

Nil.

9.5.2 Degradation of aircraft equipment – pilot reported

(A6, Part I – Chapter 7 and Appendix 4; A6, Part II – Chapter 7 and Appendix 2)

9.5.2.1 When informed by the pilot of an RVSM-approved aircraft operating in the MID RVSM airspace that the aircraft's equipment no longer meets the RVSM MASPS as specified in 4.2.2, ATC shall consider the aircraft as non-RVSM-approved.

9.5.2.2 ATC shall take action immediately to provide a minimum vertical separation of 600 m (2 000 ft) or an appropriate horizontal separation from all other aircraft concerned that are operating in the MID RVSM airspace. An aircraft rendered non-RVSM-approved shall normally be cleared out of the RVSM airspace by ATC when it is possible to do so.

9.5.2.3 Pilots shall inform ATC, as soon as practicable, of any restoration of the proper functioning of equipment required to meet the RVSM MASPS.

9.5.2.4 The first ACC to become aware of a change in an aircraft's RVSM status shall coordinate with adjacent ACCs, as appropriate.

9.5.3 Severe turbulence – not forecast

9.5.3.1 When an aircraft operating in RVSM airspace encounters severe turbulence due to weather or wake vortex that the pilot believes will impact the aircraft's capability to maintain its cleared flight level, the pilot shall inform ATC. ATC shall establish either an appropriate horizontal separation or an increased minimum vertical separation.

9.5.3.2 ATC shall, to the extent possible, accommodate pilot requests for flight level and/or route changes and shall pass on traffic information as required.

9.5.3.3 ATC shall solicit reports from other aircraft to determine whether RVSM should be suspended entirely or within a specific flight level band and/or area.

9.5.3.4 The ACC suspending RVSM shall coordinate such suspension(s) with, and any required adjustments to, sector capabilities with adjacent ACCs, as appropriate, to ensure an orderly progression to the transfer of traffic.

9.5.4 Severe turbulence – forecast

9.5.4.1 When a meteorological forecast is predicting severe turbulence, ATC shall determine whether RVSM should be suspended and, if so, for how long and for which specific flight level(s) and/or area.

9.5.4.2 In cases where RVSM will be suspended, the ACC suspending RVSM shall coordinate with adjacent ACCs with regard to the flight levels appropriate for the transfer of traffic, unless a contingency flight level allocation scheme has been determined by letter of agreement. The ACC suspending RVSM shall also coordinate applicable sector capabilities with adjacent ACCs as appropriate.

9.6 EN-ROUTE DIVERSION

Nil.

9.7 INTER-REGION INTERFACE FOR NON-RVSM-APPROVED AIRCRAFT

Nil.

9.8 MANNED BALLOON FLIGHTS

Nil.

Chapter 10. PHRASEOLOGY

(P-ATM – Chapter 12)

10.1 RNAV

10.1.1 In the ICAO MID Region, the phrase “UNABLE RNAV DUE EQUIPMENT” shall be included by the pilot immediately following the aircraft call sign whenever initial contact on an ATC frequency is established by an aircraft experiencing a failure or degradation of the RNAV system.

10.1.2 In the ICAO MID Region, the phrase “NEGATIVE RNAV” shall be included by the pilot immediately following the aircraft call sign whenever initial contact on an ATC frequency is established by a State aircraft not equipped with RNAV.

10.2 RNP

Nil.

10.3 SURVEILLANCE

Nil.

10.4 AERODROME OPERATIONS

Nil.

10.5 AFTM

Nil.

Chapter 11. SEARCH AND RESCUE

11.1 INTERNATIONAL GENERAL AVIATION (IGA)

(A6, Part II – Chapter 6)

11.1.1 General aviation aircraft operating over designated areas, land or sea, where search and rescue operations would be difficult, should:

- a) carry appropriate survival equipment; and
 - b) follow the routes or specified procedures if not equipped with two-way radio, except that under special circumstances, the appropriate authority may grant specific exemptions from this requirement.
-

Chapter 12. METEOROLOGY

12.1 AIRCRAFT OBSERVATIONS AND REPORTS

12.1.1 When air-ground data link is used and ADS is being applied, from the aircraft intending to operate on high-density air routes, ACCs shall designate those which shall be required to include the meteorological information block in the ADS messages every 15 minutes. The designation shall be made by the ACC delivering the clearance by including the required meteorological reporting frequency in the ADS contract. The designation should normally be made so as to designate one aircraft per air route and per flight level at approximately hourly intervals.

12.1.2 When voice communications are used, from the aircraft intending to operate at cruising level on high-density air routes, ACCs shall designate those which shall be required to report routine meteorological observations at each prescribed reporting point. The designation shall be made by the ACC delivering the clearance by using the phrase "SEND MET REPORTS". The designation should normally be made so as to designate one aircraft per air route and per flight level at approximately hourly intervals.

12.1.3 Aircraft cleared on high-density routes in the Amman, Bahrain, Damascus, Emirates, Jeddah, Kabul, Muscat, and Tehran FIRs between 2300 and 0500 UTC shall be required to transmit routine meteorological observations only when so designated at the time of receiving their clearance in accordance with 12.1.1 and 12.1.2.

12.1.4 When voice communications are used, aircraft flying over Japan and Continental Asia shall be exempted from reporting routine observations.

12.1.5 Aircraft cleared on high-density routes between Tokyo and Hong Kong, Tokyo and Taipei, Hong Kong and Taipei, Hong Kong and Bangkok, Hong Kong and Singapore, Hong Kong and Kuala Lumpur, Bangkok and Kuala Lumpur, and Bangkok and Singapore shall be required to transmit routine meteorological observations only when so designated at the time of receiving their clearance in accordance with 12.1.1 and 12.1.2.

Chapter 13. AERONAUTICAL INFORMATION SERVICES

13.1 NOTAM ADDRESSING AND DISTRIBUTION

Nil.

13.2 AERONAUTICAL CHART INFORMATION

13.2.1 Visual procedures

Nil.

NORTH AMERICA (NAM) REGIONAL SUPPLEMENTARY PROCEDURES

These procedures are supplementary to the provisions contained in Annex 2, Annex 3, and PANS-ATM (Doc 4444). The area of application of the NAM Regional Supplementary Procedures is included on the Index to Application of Supplementary Procedures chart.

TABLE OF CONTENTS

	<i>Chapter</i>	<i>Page</i>
Flight Rules	1	NAM 1-1
Flight Plans	2	NAM 2-1
Communications	3	NAM 3-1
Navigation	4	NAM 4-1
Surveillance	5	NAM 5-1
Air Traffic Services	6	NAM 6-1
Safety Monitoring	7	NAM 7-1
Air Traffic Flow Management	8	NAM 8-1
Special Procedures	9	NAM 9-1
Phraseology	10	NAM 10-1
Search and Rescue	11	NAM 11-1
Meteorology	12	NAM 12-1
Aeronautical Information Services	13	NAM 13-1

Chapter 1. FLIGHT RULES

1.1 VISUAL FLIGHT RULES (VFR)

1.1.1 Special application

Nil.

1.2 INSTRUMENT FLIGHT RULES (IFR)

1.2.1 Special application

Nil.

1.2.2 Flight level changes

Nil.

1.3 AIR TRAFFIC ADVISORY SERVICE

Nil.

Chapter 2. FLIGHT PLANS

2.1 CONTENT – GENERAL

2.1.1 Date of flight

Nil.

2.1.2 Area navigation (RNAV) specifications

Nil.

2.1.3 Required navigation performance (RNP) specifications

Nil.

2.1.4 Minimum navigation performance specifications (MNPS)

Nil.

2.1.5 Reduced vertical separation minimum (RVSM)-approved aircraft

2.1.5.1 The letter W shall be inserted in Item 10 (Equipment) of the flight plan if the aircraft and operator have received RVSM State approval, regardless of the requested flight level. The aircraft registration shall be inserted in Item 18 of the flight plan.

2.1.6 Non-RVSM-approved aircraft

Nil.

2.1.7 Non-RVSM-approved State aircraft

Nil.

2.1.8 Indication of 8.33 kHz channel spacing capability

Nil.

2.1.9 Route

Nil.

2.1.10 Estimated times

Nil.

2.1.11 Mach number

Nil.

2.1.12 Alternative flight level

Nil.

2.1.13 Special handling (STS)

Nil.

2.2 CONTENT – AIR TRAFFIC FLOW MANAGEMENT (ATFM)**2.2.1 Runway visual range (RVR)**

Nil.

2.2.2 Flight plan addressing and distribution

Nil.

2.2.3 Slot allocation exemptions

Nil.

2.3 SUBMISSION**2.3.1 General**

Nil.

2.3.2 Amendments

Nil.

2.4 REPETITIVE FLIGHT PLANS (RPLs)

Nil.

Chapter 3. COMMUNICATIONS

3.1 AIR-GROUND COMMUNICATIONS AND IN-FLIGHT REPORTING

3.1.1 Communications equipment

Nil.

3.1.2 Continuous listening watch in uncontrolled airspace

Nil.

3.1.3 Position reports

Nil.

3.1.4 Abbreviated position reports

Nil.

3.1.5 Read-back of VHF channels

Nil.

3.2 MANDATORY CARRIAGE OF 8.33 KHZ CHANNEL SPACING CAPABLE RADIO EQUIPMENT

Nil.

3.3 CONTROLLER-PILOT DATA LINK COMMUNICATIONS (CPDLC)

Nil.

3.4 SATELLITE VOICE COMMUNICATIONS (SATCOM)

Nil.

3.5 AERONAUTICAL MOBILE SERVICE

3.5.1 Selective calling (SELCAL)

Nil.

3.5.2 HF operations

3.5.2.1 HF aeronautical mobile service is provided to flights operating in the Arctic area of the Anchorage Continental and Anchorage Arctic FIRs on frequencies of the North Atlantic Family D Network (NAT-D) via Cambridge Bay Radio.

3.6 AERONAUTICAL FIXED SERVICE

3.6.1 AFTN rationalization

Nil.

3.7 RADIO CHANNELS/FREQUENCIES

Nil.

Chapter 4. NAVIGATION

4.1 PERFORMANCE-BASED NAVIGATION (PBN)

Note.— As the North American (NAM) Region transitions to PBN as contained in the Performance-based Navigation Manual (Doc 9613), the contents of 4.1 will be amended.*

4.1.1 Area navigation (RNAV) specifications

4.1.1.1 RNAV 10 (RNP 10)

Nil.

4.1.1.2 RNAV 5

Nil.

4.1.1.3 RNAV 2

Nil.

4.1.1.4 RNAV 1

Nil.

4.1.1.5 Pre-PBN navigation specifications

Nil.

4.1.2 Required navigation performance (RNP) specifications

4.1.2.1 RNP 4

Nil.

4.1.2.2 Basic RNP 1

Nil.

* In preparation.

4.1.2.3 Advanced RNP 1

Nil.

4.2 REDUCED VERTICAL SEPARATION MINIMUM (RVSM)**Area of applicability**

4.2.1 A minimum vertical separation of 300 m (1 000 ft) shall be applied between FL 290 and FL 410 inclusive in the following flight information regions/control areas (FIRs/CTAs):

Albuquerque, Anchorage Arctic, Anchorage Continental, Atlanta, Boston, Chicago, Cleveland, Denver, Edmonton, Fort Worth, Gander, Houston, Indianapolis, Jacksonville, Kansas City, Los Angeles, Memphis, Miami, Minneapolis, Moncton, Montreal, New York, Oakland, Salt Lake City, Seattle, Toronto, Vancouver, Washington and Winnipeg.

Note.— Implementation will be promulgated by appropriate Aeronautical Information Service (AIP) Supplements and included in the respective Aeronautical Information Publications (AIPs).

Means of compliance

(A2 – Chapter 5 and Appendix 3; A6, Part I – Chapters 3, 4 and 7;
A6, Part II – Chapters 3 and 7; A8, Part IIIA – Chapter 8; A11 – Chapter 2)

4.2.2 Operators intending to conduct flights within the NAM Region where RVSM is applied shall require an RVSM approval either from the State of Registry or the State of the Operator. The State of Registry or the State of the Operator, as appropriate, should verify that the height-keeping performance capability of approved aircraft meets the requirements specified in Annex 6, Parts I and II.

Chapter 5. SURVEILLANCE

(P-ATM – Chapter 8; P-OPS, Vol. I, Part III)

5.1 SECONDARY SURVEILLANCE RADAR (SSR)

5.1.1 Carriage of pressure-altitude reporting SSR transponders

Nil.

5.1.2 Code allocation methodology

Nil.

5.1.3 Assignment of SSR codes

Nil.

5.1.4 Operation of pressure-altitude reporting SSR transponders

Nil.

5.1.5 Monitoring of SSR-derived information

Nil.

5.2 SSR MODE S

5.2.1 Carriage and operation of SSR Mode S

Nil.

5.2.2 Transition between Mode A/C and Mode S

Nil.

5.3 AIRBORNE COLLISION AVOIDANCE SYSTEMS (ACAS)

5.3.1 Carriage and operation of ACAS II

Nil.

5.4 AUTOMATIC DEPENDENT SURVEILLANCE – CONTRACT (ADS-C)

Nil.

5.5 AUTOMATIC DEPENDENT SURVEILLANCE – BROADCAST (ADS-B)

Nil.

Chapter 6. AIR TRAFFIC SERVICES

6.1 AIR TRAFFIC CONTROL (ATC) CLEARANCES

6.1.1 Content

Nil.

6.1.2 Adherence

Nil.

6.2 SEPARATION

6.2.1 Lateral

(A11 – Attachment B; P-ATM – Chapters 5 and 15)

6.2.1.1 Minimum lateral separation in the Anchorage Arctic CTA shall be 167 km (90 NM) except the lower minima in 5.4.1.2 of the PANS-ATM may be applied, or further reduced in accordance with 5.11 of the PANS-ATM, when the conditions specified in the relevant PANS-ATM provisions are met.

6.2.2 Longitudinal

(P-ATM – Chapter 5)

6.2.2.1 Minimum longitudinal separation in the Anchorage Arctic CTA shall be:

a) 15 minutes between turbo-jet aircraft:

1) this separation may be reduced to 10 minutes provided the Mach number technique is applied in accordance with the PANS-ATM, 5.4.2.4; or

b) 20 minutes between other aircraft.

6.2.3 Composite

Nil.

6.2.4 Vertical

(A2 – Appendix 3; PANS-ATM – Chapter 5)

6.2.4.1 An RVSM of 300 m (1 000 ft) shall be applied between FL 290 and FL 410 inclusive for flights within the FIRs specified in 4.2.1.

6.2.4.2 The minimum separation of 6.2.4.1 shall only be applied between aircraft where those aircraft and the operator have been approved by the State of Registry or the State of the Operator, as appropriate, to conduct flights in RVSM airspace.

6.2.4.3 Aircraft that have not received RVSM State approval may be cleared to operate in airspace where RVSM may be applied in accordance with policy and procedures established by the State provided that 600 m (2 000 ft) vertical separation is applied.

6.2.4.4 States concerned shall publish the appropriate information in AIPs, so that users of the airspace are fully aware of the portions of the airspace where the reduced separation minimum will be applied, and of the associated special procedures, where applicable.

6.2.4.5 The operators will adopt operational policy and procedures applicable in the RVSM area of operations specified in 4.2.1.

6.2.5 Radar

Nil.

6.2.6 Reduction in separation minima

Nil.

6.2.7 Airspace reservations

Nil.

6.3 MINIMUM FLIGHT LEVEL

6.3.1 Establishment

Nil.

6.4 ATS ROUTES

6.4.1 Track systems

Nil.

6.4.2 RNAV

Nil.

6.5 AERODROME OPERATIONS

6.5.1 Area of applicability

Nil.

6.5.2 Intersection take-off

Nil.

6.5.3 Multiple line-ups on the same runway

Nil.

6.5.4 Visual departures

Nil.

6.5.5 Visual approaches

Nil.

6.6 RNAV PROCEDURES

6.6.1 General

Nil.

6.6.2 En route

Nil.

6.6.3 Terminal

Nil.

6.6.4 State aircraft

Nil.

6.7 RNP PROCEDURES

6.7.1 General

Nil.

6.7.2 En route

Nil.

6.7.3 Terminal

Nil.

6.7.4 State aircraft

Nil.

6.8 COMPOSITE PROCEDURES

Nil.

6.9 MNPS PROCEDURES

Nil.

6.10 RVSM PROCEDURES

6.10.1 General

6.10.1.1 Operation of aircraft not approved for RVSM

6.10.1.1.1 Aircraft that have not received RVSM State approval may be cleared to operate in RVSM airspace in accordance with policy and procedures established by the State provided that 600 m (2 000 ft) vertical separation is applied.

6.10.2 Transition to/from RVSM airspace

(A2 – Appendix 3; A6, Parts I and II – Chapter 7; A11 – Chapter 3; P-ATM – Chapter 5)

6.10.2.1 In order to allow the transition of flights to/from a vertical separation minimum of 300 m (1 000 ft) between FL 290 and FL 410 inclusive, the ATS authorities may establish designated airspaces defined as reduced vertical separation minimum (RVSM) transition areas.

6.10.2.2 An RVSM transition area will normally have a vertical extent of FL 290 to FL 410 inclusive, with defined horizontal dimensions as determined by the appropriate ATS authority, either individually or in consultation with and agreement between the ATS authorities concerned, and be adjacent to, overlapping with or contained within designated RVSM airspace.

6.11 ATS COORDINATION

6.11.1 Between units providing area control services

Nil.

6.11.2 RNAV

Nil.

6.11.3 RNP

Nil.

6.11.4 RVSM

Nil.

6.11.5 SSR codes

Nil.

6.12 ATS MESSAGES

6.12.1 Flight plan and departure

(P-ATM – Chapter 10)

6.12.1.1 Filed flight plan messages for flights intending to operate within the NAT Region at a distance of 110 km (60 NM) or less from the northern and southern boundaries of Gander Oceanic and Shanwick Oceanic FIRs shall be addressed to the ACCs in charge of the NAT FIRs along the route and, in addition, to the ACCs in charge of the nearest adjacent NAT FIRs.

6.12.1.2 For flights departing from points within adjacent regions and entering the NAT Region without intermediate stops, filed flight plan messages shall be transmitted to the appropriate ACCs immediately after the flight plan has been submitted.

6.12.2 Arrival

Nil.

6.12.3 Boundary estimates

Nil.

6.12.4 Computer-assisted coordination

Nil.

6.13 FLIGHT INFORMATION SERVICE (FIS)**6.13.1 Automatic terminal information services (ATIS)**

Nil.

6.13.2 SIGMETs

Nil.

6.13.3 Special air-reports

Nil.

6.13.4 Amended aerodrome forecasts

Nil.

6.13.5 Landing forecasts

Nil.

6.14 ALERTING SERVICE

Nil.

Chapter 7. SAFETY MONITORING

7.1 STRATEGIC LATERAL OFFSET PROCEDURES (SLOP)

Nil.

7.2 AIRSPACE MONITORING

7.2.1 General

Nil.

7.2.2 RNAV

Nil.

7.2.3 RNP

Nil.

7.2.4 RVSM

7.2.4.1 Target level of safety (TLS)

7.2.4.1.1 Application of RVSM in the airspace designated in 4.2.1 shall meet a TLS of 5×10^{-9} fatal accidents per aircraft flight hour due to all causes of risk in the vertical dimension.

7.2.4.1.2 Adequate monitoring of flight operations in the designated RVSM airspace shall be conducted to assist in the assessment of continuing compliance of aircraft with the height-keeping capabilities in 4.2.2. Monitoring shall include assessment of other sources of risk to ensure that the TLS specified in 7.2.4.1.1 is not exceeded.

Chapter 8. AIR TRAFFIC FLOW MANAGEMENT (ATFM)

8.1 PROVISION

Nil.

8.2 APPLICATION

Nil.

8.3 EXEMPTIONS FROM ATFM SLOT ALLOCATION

Nil.

8.4 DEPARTURE SLOT MONITORING

Nil.

8.5 PROMULGATION OF ATFM MEASURES

8.5.1 Strategic ATFM measures

Nil.

8.5.2 Amendments to promulgated strategic ATFM measures

Nil.

8.5.3 ATFM circulars and information

Nil.

8.5.4 Pre-flight information bulletin (PIB)

Nil.

8.5.5 Query procedures

Nil.

Chapter 9. SPECIAL PROCEDURES

9.1 EMERGENCY DESCENT PROCEDURES

9.1.1 Action by the pilot-in-command

Nil.

9.1.2 Action by the ATS unit

Nil.

9.2 CONTINGENCY PROCEDURES INCLUDING TURN-BACKS

Nil.

9.3 AIR-GROUND COMMUNICATION FAILURE

Nil.

9.4 DEGRADATION OR FAILURE OF THE RNAV SYSTEM

9.4.1 Action by the pilot-in-command

Nil.

9.4.2 Action by the ATS unit

Nil.

9.5 LOSS OF VERTICAL NAVIGATION PERFORMANCE REQUIRED FOR RVSM

9.5.1 General

Nil.

9.5.2 Degradation of aircraft equipment – pilot reported

Nil.

9.5.3 Severe turbulence – not forecast

Nil.

9.5.4 Severe turbulence – forecast

Nil.

9.6 EN-ROUTE DIVERSION

Nil.

9.7 INTER-REGION INTERFACE FOR NON-RVSM-APPROVED AIRCRAFT

Nil.

9.8 MANNED BALLOON FLIGHTS

Nil.

Chapter 10. PHRASEOLOGY

10.1 RNAV

Nil.

10.2 RNP

Nil.

10.3 SURVEILLANCE

Nil.

10.4 AERODROME OPERATIONS

Nil.

10.5 ATFM

Nil.

Chapter 11. SEARCH AND RESCUE

11.1 INTERNATIONAL GENERAL AVIATION (IGA)

Nil.

Chapter 12. METEOROLOGY

12.1 AIRCRAFT OBSERVATIONS AND REPORTS

(A3 – Chapter 5)

12.1.1 When voice communications are used, aircraft shall be exempted from reporting any routine observations, except when flying north of latitude 55°N and west of longitude 80°W and when flying north of latitude 60°N and east of longitude 80°W.

Chapter 13. AERONAUTICAL INFORMATION SERVICES

13.1 NOTAM ADDRESSING AND DISTRIBUTION

Nil.

13.2 AERONAUTICAL CHART INFORMATION

13.2.1 Visual procedures

Nil.

NORTH ATLANTIC (NAT) REGIONAL SUPPLEMENTARY PROCEDURES

These procedures are supplementary to the provisions contained in Annex 2, Annex 6 (Parts I, II and III), Annex 8, Annex 10, Annex 11, PANS-ATM (Doc 4444) and PANS-OPS (Doc 8168). They do not apply in the local areas established by the appropriate authorities around Bermuda, Iceland, the Faroe Islands and Santa Maria, and in Greenland. The area of application of the NAT Regional Supplementary Procedures is included on the Index to Application of Supplementary Procedures chart.

TABLE OF CONTENTS

	<i>Chapter</i>	<i>Page</i>
Flight Rules	1	NAT 1-1
Flight Plans	2	NAT 2-1
Communications	3	NAT 3-1
Navigation	4	NAT 4-1
Surveillance	5	NAT 5-1
Air Traffic Services	6	NAT 6-1
Safety Monitoring	7	NAT 7-1
Air Traffic Flow Management	8	NAT 8-1
Special Procedures	9	NAT 9-1
Phraseology	10	NAT 10-1
Search and Rescue	11	NAT 11-1
Meteorology	12	NAT 12-1
Aeronautical Information Services	13	NAT 13-1

Chapter 1. FLIGHT RULES

1.1 VISUAL FLIGHT RULES (VFR)

1.1.1 Special application

Nil.

1.2 INSTRUMENT FLIGHT RULES (IFR)

(A2 – Chapters 2 and 5)

Note.— Annex 2, 2.2, permits a flight to operate using either instrument flight rules or visual flight rules when operated in visual meteorological conditions subject to the limitations listed in Chapter 4 of the Annex. The following indicates certain additional restrictions.

1.2.1 Special application

1.2.1.1 Flights shall be conducted in accordance with the instrument flight rules when operated at or above flight level (FL) 60 or 600 m (2 000 ft) above ground, whichever is the higher, within:

- a) the New York Oceanic, Gander Oceanic, Shanwick Oceanic, Santa Maria Oceanic, Søndrestrøm and Reykjavik flight information regions (FIRs); and
- b) the Bodø Oceanic FIR when operated more than 185 km (100 NM) seaward from the shoreline.

1.2.2 Flight level changes

Nil.

1.3 AIR TRAFFIC ADVISORY SERVICE

Nil.

Chapter 2. FLIGHT PLANS

2.1 CONTENT – GENERAL

(A2 – Chapter 3; P-ATM – Chapter 4 and Appendix 2)

2.1.1 Date of flight

Nil.

2.1.2 Area navigation (RNAV) specifications

Nil.

2.1.3 Required navigation performance (RNP) specifications

Nil.

2.1.4 Minimum navigation performance specifications (MNPS)

2.1.4.1 All MNPS-approved aircraft intending to operate in the NAT Region shall insert the letter “X” in Field 10 of the flight plan.

2.1.5 Reduced vertical separation minimum (RVSM)-approved aircraft

2.1.5.1 The letter W shall be inserted in Item 10 (Equipment) of the flight plan if the aircraft and operator have received RVSM State approval, regardless of the requested flight level. The aircraft registration shall be inserted in Item 18 of the flight plan.

2.1.6 Non-RVSM-approved aircraft

Nil.

2.1.7 Non-RVSM-approved State aircraft

Nil.

2.1.8 Indication of 8.33 kHz channel spacing capability

Nil.

2.1.9 Route

2.1.9.1 General

2.1.9.1.1 Flights conducted wholly or partly outside the organized tracks shall be planned along great circle tracks joining successive significant points. Flight plans shall be made in accordance with the following.

2.1.9.1.2 Flights operating between North America and Europe shall generally be considered as operating in a predominantly east-west direction. However, flights planned between these two continents via the North Pole shall be considered as operating in a predominantly north-south direction.

2.1.9.2 Flights operating predominantly in an east-west direction

2.1.9.2.1 For flights operating south of 70°N, the planned tracks shall normally be defined by significant points formed by the intersection of half or whole degrees of latitude with meridians spaced at intervals of 10 degrees from the Greenwich meridian to longitude 70°W.

2.1.9.2.2 For flights operating north of 70°N, the planned tracks shall normally be defined by significant points formed by the intersection of parallels of latitude expressed in degrees and minutes with meridians normally spaced at intervals of 20 degrees from the Greenwich meridian to longitude 60°W.

2.1.9.2.3 The distance between significant points shall, as far as possible, not exceed one hour's flight time. Additional significant points should be established when deemed necessary due to aircraft speed or the angle at which the meridians are crossed, e.g.:

- a) at intervals of 10 degrees of longitude (between 5°W and 65°W) for flights operating south of 70°N; and
- b) at intervals of 20 degrees of longitude (between 10°W and 50°W) for flights operating north of 70°N.

2.1.9.2.4 When the flight time between successive significant points is less than 30 minutes, one of these points may be omitted.

2.1.9.3 Flights operating predominantly in a north-south direction

2.1.9.3.1 For flights whose flight paths are predominantly oriented in a north-south direction, the planned tracks shall normally be defined by significant points formed by the intersection of whole degrees of longitude with specified parallels of latitude which are spaced at intervals of 5 degrees.

2.1.9.4 Flights operating on an organized track

2.1.9.4.1 For flights conducted along one of the organized tracks from the entry point into the NAT FIRs to the exit point, the organized track shall be defined in the flight plan by the abbreviation "NAT" followed by the code letter assigned to the track.

2.1.9.5 Flights operating along fixed ATS routes

2.1.9.5.1 For flights operating along the fixed ATS route network between Canada, the United States, Bermuda and the CAR Region, the track shall be defined by appropriate reference to this route network.

2.1.10 Estimated times

2.1.10.1 For flights conducted along one of the organized tracks from the entry point into the NAT FIRs to the exit point, the accumulated estimated elapsed time only to the first oceanic FIR boundary should be specified in Item 18 of the flight plan.

2.1.10.2 For flights conducted wholly or partly outside the organized tracks in the NAT Region, accumulated estimated elapsed times to significant points en route shall be specified in Item 18 of the flight plan.

2.1.11 Mach number

2.1.11.1 For turbo-jet aircraft intending to operate within the Bodø Oceanic, Gander Oceanic, New York Oceanic, Reykjavik, Santa Maria Oceanic and Shanwick Oceanic control areas, the planned true Mach number for any portion of their flight within these control areas shall be specified in Item 15 of the flight plan.

2.1.12 Alternative flight level

2.1.12.1 For turbo-jet aircraft intending to operate within the Gander Oceanic, New York Oceanic, Reykjavik, Santa Maria Oceanic and Shanwick Oceanic control areas, requests for a suitable alternative flight level may be included in Item 18 of the flight plan.

2.1.13 Special handling (STS)

Nil.

2.2 CONTENT – AIR TRAFFIC FLOW MANAGEMENT (ATFM)**2.2.1 Runway visual range (RVR)**

Nil.

2.2.2 Flight plan addressing and distribution

Nil.

2.2.3 Slot allocation exemptions

Nil.

2.3 SUBMISSION

(A2 – Chapter 3; P-ATM – Chapter 4)

2.3.1 General

2.3.1.1 Flight plans for flights departing from points within adjacent regions and entering the NAT Region without intermediate stops shall be submitted as early as possible.

2.3.2 Amendments

Nil.

2.4 REPETITIVE FLIGHT PLANS (RPLs)

Nil.

Chapter 3. COMMUNICATIONS

3.1 AIR-GROUND COMMUNICATIONS AND IN-FLIGHT REPORTING

3.1.1 Communications equipment

Nil.

3.1.2 Continuous listening watch in uncontrolled airspace

Nil.

3.1.3 Position reports

(A2 – Chapters 3 and 5; P-ATM – Chapter 4)

3.1.3.1 Unless otherwise required by air traffic services, position reports for flights on routes not defined by designated reporting points shall be made at the significant points listed in the flight plan.

3.1.3.2 Air traffic services may require any flight operating predominantly in an east-west direction to report its position at any of the intermediate meridians spaced at intervals of:

- a) 10 degrees of longitude south of 70°N (between 5°W and 65°W); and
- b) 20 degrees of longitude north of 70°N (between 10°W and 50°W).

3.1.3.3 In requiring aircraft to report their position at intermediate intervals, the air traffic services authorities will be guided by the requirement to have position information at approximately hourly intervals and also by the need to cater for varying types of aircraft and for varying traffic and meteorological conditions.

Position and time

3.1.3.4 Verbal position reports shall be identified by the spoken word “Position” transmitted immediately before or after the aircraft identification.

3.1.3.5 For flights outside the ATS route network, the position shall be expressed in terms of latitude and longitude as follows:

- a) for flights operating in a predominantly east-west direction:
 - 1) latitude in degrees and minutes; and
 - 2) longitude in degrees only;

b) for flights operating in a predominantly north-south direction:

- 1) latitude in degrees only; and
- 2) longitude in degrees and minutes.

3.1.3.6 When making position reports, all times should be expressed in four digits, giving both the hour and minutes.

Time over next position

3.1.3.7 If the estimated time for the next position last reported to air traffic control is found to be in error by three minutes or more, a revised estimated time over shall be transmitted as soon as possible to the ATS unit concerned.

Transmission

(P-ATM – Chapter 4)

3.1.3.8 Position reports made by aircraft operating within an oceanic control area at a distance of 110 km (60 NM) or less from the common boundary with an adjacent oceanic control area, including aircraft operating on tracks through successive points on such boundary, shall also be made to the area control centre serving the adjacent control area.

3.1.3.9 Responsibility for the transmission of position reports to the additional ATS units specified in 3.1.3.8 may be delegated to the appropriate communications station(s) through local arrangements.

3.1.4 Abbreviated position reports

Nil.

3.1.5 Read-back of VHF channels

Nil.

3.2 MANDATORY CARRIAGE OF 8.33 KHZ CHANNEL SPACING CAPABLE RADIO EQUIPMENT

Nil.

3.3 CONTROLLER-PILOT DATA LINK COMMUNICATIONS (CPDLC)

Nil.

3.4 SATELLITE VOICE COMMUNICATIONS (SATCOM)

(A2 – Chapter 3; P-ATM – Chapter 15; P-OPS, Vol. 1)

3.4.1 Within the NAT Region, aircraft equipped for SATCOM voice shall restrict the use of such equipment to emergencies and non-routine situations. An unforeseen inability to communicate by voice radio constitutes a non-routine situation. Since oceanic traffic typically communicates through aeradio facilities, a SATCOM call due to an unforeseen inability to communicate by other means should be made to such a facility rather than the ATC centre unless the urgency of the communication dictates otherwise. Dedicated SATCOM telephone numbers (short codes) for aeradio facilities and air traffic control facilities are published in national AIPs.

3.5 AERONAUTICAL MOBILE SERVICE

3.5.1 Selective calling (SELCAL)

3.5.1.1 While operating in an HF air-ground communications environment, pilots shall maintain a listening watch on the assigned radio frequency. This will not be necessary, however, if a SELCAL watch is maintained and correct operation is ensured. Correct SELCAL operation shall be ensured by:

- a) the inclusion of the SELCAL code in the flight plan;
- b) the issue of a correction to the SELCAL code if subsequently altered due to change of aircraft or equipment; and
- c) an operational check of the SELCAL equipment with the appropriate radio station at or before initial entry into oceanic airspace. This SELCAL check must be completed successfully before commencing a SELCAL watch.

Note.— A SELCAL watch on the assigned radio frequency should be maintained, even in areas of the region where VHF coverage is available and used for air-ground communications.

3.5.2 HF operations

(A10, Vol. II – Chapter 5)

3.5.2.1 Procedures for the distribution of the NAT HF aeromobile message traffic of the users on the NAT routes between the various NAT HF families are indicated in the table below.

Note.— In the following table, under route flown, the letters “A”, “B”, “C”, “D” and “E” refer to NAT frequency families A, B, C, D and E.

<i>Designated for</i>	<i>Southern route</i>	<i>Central route</i>	<i>Northern route</i>
Aircraft registered in the hemisphere W of 30°W	A	B	B
Aircraft registered in the hemisphere E of 30°W	A	C	C

<i>Designated for</i>	<i>Southern route</i>	<i>Central route</i>	<i>Northern route</i>
Aircraft flying northern routes outside the organized track system (OTS) tracks	—	—	D
Aircraft flying southern routes	R	—	—

Note 1.— Southern routes are those which enter the New York Oceanic or Santa Maria Oceanic FIRs. The central and northern routes comprise all the others.

Note 2.— Use of the NAT-D radiotelephony network frequencies is extended to the Arctic area of the Anchorage Arctic FIR, via Cambridge Bay Radio.

Note 3.— Aircraft registered in Australia will use families designated for aircraft registered East of 30°W.

3.5.2.2 In the event of overloading of a family actually occurring or being anticipated, aircraft of one or more operators may be offloaded from that family to another appropriate family, for the expected duration of the condition. The offloading may be requested by any station, but Shannon and Gander will be responsible for taking a decision after coordination with all the NAT stations concerned.

3.5.2.3 Procedures to follow when unable to obtain an oceanic clearance using HF communications (P-ATM – Chapter 15)

3.5.2.3.1 Aircraft experiencing radio communication failure shall maintain their current flight level, route and speed to the Oceanic exit point. Thereafter, it shall follow the radio communication failure procedure applicable for that airspace.

Note.— In this context, the current flight level is the last cleared level unless the preceding units' radio communication failure procedure dictates otherwise. In all cases, aircraft should stay in level flight in the oceanic area. Current speed should be the initial oceanic Mach number in the flight plan, if the aircraft does not have a speed clearance.

3.6 AERONAUTICAL FIXED SERVICE

3.6.1 AFTN rationalization

Nil.

3.7 RADIO CHANNELS/FREQUENCIES

Nil.

Chapter 4. NAVIGATION

4.1 PERFORMANCE-BASED NAVIGATION (PBN)

Note.— As the North Atlantic (NAT) Region transitions to PBN as contained in the Performance-based Navigation Manual (Doc 9613), the contents of 4.1 will be amended.*

4.1.1 Area navigation (RNAV) specifications

4.1.1.1 RNAV 10 (RNP 10)

Nil.

4.1.1.2 RNAV 5

Nil.

4.1.1.3 RNAV 2

Nil.

4.1.1.4 RNAV 1

Nil.

4.1.1.5 Pre-PBN navigation specifications

4.1.1.5.1 Minimum navigation performance specifications (MNPS)

Area of applicability

4.1.1.5.1.1 The MNPS shall be applicable in that volume of airspace between FL 285 and FL 420 within the Oceanic Control Areas of Santa Maria, Shanwick, Reykjavik, Gander Oceanic and New York Oceanic, excluding the area west of 60°W and south of 38°30'N.

Note.— This volume of airspace is referred to as the “MNPS airspace”.

* In preparation.

Means of compliance

(A2 – Chapter 5; A6, Part I – Chapters 3, 4 and 7; A6, Part II – Chapters 3 and 7; A8 – Chapter 8)

4.1.1.5.1.2 For flights within the volume of airspace specified in 4.1.1.5.1.1 aircraft shall have lateral navigation performance capability such that:

- a) the standard deviation of lateral track errors shall be less than 11.7 km (6.3 NM);
- b) the proportion of the total flight time spent by aircraft 56 km (30 NM) or more off the cleared track shall be less than 5.3×10^{-4} ; and
- c) the proportion of the total flight time spent by aircraft between 93 and 130 km (50 and 70 NM) off the cleared track shall be less than 1.3×10^{-5} .

4.1.1.5.1.3 The State of Registry or the State of the Operator, as appropriate, should verify that the lateral navigation capability of approved aircraft meets the requirements specified in 4.1.1.5.1.2.

Note.— Guidance material of use to those involved in the initial achievement and continued maintenance of the navigation capability set forth in 4.1.1.5.1.2 has been issued by ICAO under the title Guidance and Information Material Concerning Air Navigation in the North Atlantic Region (NAT Doc. 001) and will be supplemented and updated as required and as new material becomes available.

4.1.1.5.1.4 When granting approval for operations in MNPS airspace, States of Registry shall ensure that in-flight operating drills include mandatory navigation cross-checking procedures which will identify navigation errors in sufficient time to prevent the aircraft inadvertently deviating from the ATC-cleared route. Guidance on procedures are detailed in NAT Doc 001 and North Atlantic MNPS Airspace Operations Manual.

4.1.2 Required navigation performance (RNP) specifications

4.1.2.1 RNP 4

Nil.

4.1.2.2 Basic RNP 1

Nil.

4.1.2.3 Advanced RNP 1

Nil.

4.2 REDUCED VERTICAL SEPARATION MINIMUM (RVSM)

Area of applicability

4.2.1 RVSM shall be applicable in that volume of airspace between FL 290 and FL 410 inclusive in all FIRs of the NAT Region.

Means of compliance

(A2 – Chapter 5 and Appendix 3; A6, Part I – Chapters 3, 4 and 7;
A6, Part II – Chapters 3 and 7; A8, Part IIIA – Chapter 8, A11 – Chapter 2)

4.2.2 Operators intending to conduct flights within the NAT Region where RVSM is applied shall require an RVSM approval either from the State of Registry or the State of the Operator. The State of Registry or the State of the Operator, as appropriate, should verify that the height-keeping performance capability of approved aircraft meets the requirements specified in Annex 6, Parts I and II.

Note.— Guidance material of use to those involved in the initial achievement and continued maintenance of the height-keeping performance has been issued by ICAO under the title Guidance and Information Material Concerning Air Navigation in the North Atlantic Region (NAT Doc. 001) and will be supplemented and updated as required and as new material becomes available.

Chapter 5. SURVEILLANCE

5.1 SECONDARY SURVEILLANCE RADAR (SSR) (P-ATM – Chapter 8; P-OPS, Vol. I)

5.1.1 Carriage of pressure-altitude reporting SSR transponders

5.1.1.1 All aircraft operating as IFR flights in the NAT Region shall be equipped with a pressure-altitude reporting SSR transponder.

5.1.2 Code allocation methodology

Nil.

5.1.3 Assignment of SSR codes

Nil.

5.1.4 Operation of pressure-altitude reporting SSR transponders

5.1.4.1 Unless otherwise directed by ATC, pilots of aircraft equipped with SSR flying in NAT FIRs shall retain the last assigned identity (Mode A) code for a period of 30 minutes after entry into NAT airspace.

5.1.5 Monitoring of SSR-derived information

Nil.

5.2 SSR MODE S

5.2.1 Carriage and operation of SSR Mode S

Nil.

5.2.2 Transition between Mode A/C and Mode S

Nil.

5.3 AIRBORNE COLLISION AVOIDANCE SYSTEMS (ACAS)

5.3.1 Carriage and operation of ACAS II

(A2 – Chapter 3; A6, Part I – Chapter 6; A10, Vol. IV;
A11 – Chapter 2; P-OPS, Vol. I; P-ATM – Chapters 4 and 10)

5.3.1.1 ACAS II shall be carried and operated in the NAT Region by all turbine-engined aeroplanes having a maximum certificated take-off mass exceeding 5 700 kg or authorized to carry more than 19 passengers.

5.4 AUTOMATIC DEPENDENT SURVEILLANCE – CONTRACT (ADS-C)

Nil.

5.5 AUTOMATIC DEPENDENT SURVEILLANCE – BROADCAST (ADS-B)

Nil.

Chapter 6. AIR TRAFFIC SERVICES

6.1 AIR TRAFFIC CONTROL (ATC) CLEARANCES

6.1.1 Content

(A11 – Chapter 3; P-ATM – Chapters 4 and 11)

6.1.1.1 An abbreviated clearance shall only be issued by ATS when clearing an aircraft to follow one of the organized tracks throughout its flight within the NAT control areas or when clearing an aircraft to follow its flight plan route. In all other circumstances, full details of the cleared track shall be specified in the clearance message.

6.1.1.2 When an abbreviated clearance is issued to follow one of the organized tracks, it shall include:

- a) cleared track specified by the track code;
- b) cleared flight level(s);
- c) cleared true Mach number (if required); and
- d) if the aircraft is designated to report meteorological information in flight, the phrase “SEND MET REPORTS”.

6.1.1.3 On receipt of an abbreviated clearance, the pilot shall read back the contents of the clearance message. In addition, when cleared to follow one of the organized tracks, the pilot shall read back full details of the track specified by the code letter, except where alternative procedures using VHF techniques exist which include provision for the confirmation of cleared track by the pilot.

6.1.1.4 When an abbreviated clearance is issued to follow the flight plan route, it shall only be issued using direct controller-pilot communication and shall include:

- a) the expression “cleared via flight planned route”;
- b) cleared flight level(s); and
- c) cleared true Mach number (if required).

6.1.1.5 On receipt of an abbreviated clearance, the pilot shall read back the contents of the clearance message. In addition, when cleared via “flight planned route”, the pilot shall read back full details of the flight plan route.

6.1.1.6 A pilot-in-command shall, if at any time in doubt, request a detailed description of the route from ATS.

6.1.1.7 The ATC-approved true Mach number shall be included in each clearance given to subsonic turbo-jet aircraft operating within Bodø Oceanic, Gander Oceanic, New York Oceanic, Reykjavik, Santa Maria Oceanic and Shanwick Oceanic control areas.

6.1.2 Adherence

(A2 – Chapter 3)

6.1.2.1 If an aircraft has inadvertently deviated from the route specified in its ATC clearance, it shall forthwith take action to regain such route within 185 km (100 NM) from the position at which the deviation was observed.

6.1.2.2 Unable to obtain oceanic clearance using HF voice

(P-ATM – Chapter 15)

6.1.2.2.1 Aircraft operating outside VHF coverage that are unable to contact ATC on HF to obtain an Oceanic clearance shall continue to operate at the last assigned flight level and along the cleared route of flight until communications are re-established.

Note.— Failure of HF communications often stems from poor signal propagation, frequently because of sun spot activity, and is likely to simultaneously affect multiple aircraft operating in a particular region. ATM systems dependent on HF are designed around the assumption that communication may be temporarily interrupted and that aircraft affected will continue to operate in accordance with the last received and acknowledged clearance, until communication is restored.

6.2 SEPARATION**6.2.1 Lateral**

(A11 – Attachment B; P-ATM – Chapter 5)

6.2.1.1 Minimum lateral separation shall be:

- a) 110 km (60 NM) between aircraft which meet the minimum navigation performance specifications (MNPS) provided that a portion of the route of the aircraft is within, above, or below MNPS airspace;
- b) 167 km (90 NM) between aircraft operating outside the MNPS airspace and at least one aircraft does not meet the MNPS:
 - 1) between the Iberian Peninsula and the Azores Islands; and
 - 2) between Iceland and points in Scandinavia and in the United Kingdom;
- c) 167 km (90 NM) between aircraft operating outside MNPS airspace where no portion of the route of the aircraft is within, above, or below MNPS airspace:
 - 1) between the United States/Canada and Bermuda; and
 - 2) west of 55°W between the United States, Canada or Bermuda and points in the CAR Region;

Note.— MNPS airspace is defined in 4.1.1.5.1.1

- d) 223 km (120 NM) between other aircraft;

except that lower minima in 5.4.1.2 of the PANS-ATM may be applied, or further reduced in accordance with 5.11 of the PANS-ATM, when the conditions specified in the relevant PANS-ATM provisions are met (see 6.2.6).

6.2.1.2 In the practical application of the minima in 6.2.1.1 a), b), c) and d), tracks may be spaced with reference to their difference in latitude, using one degree instead of 110 km (60 NM); one and one-half degrees instead of 167 km (90 NM); and two degrees instead of 223 km (120 NM), provided that in any interval of ten degrees of longitude, the change in latitude of at least one of the tracks does not exceed:

- a) three degrees at or south of 58°N;
- b) two degrees north of 58°N and south of 70°N; and
- c) one degree at or north of 70°N and south of 80°N.

At or north of 80°N, or where the above rates of change of latitude are exceeded, the required lateral separation must be ensured by reference to the track spacing expressed in nautical miles.

6.2.2 Longitudinal

(P-ATM – Chapter 5)

6.2.2.1 Minimum longitudinal separation between turbo-jet aircraft shall be:

- a) 15 minutes; or
- b) 10 minutes, provided the Mach number technique is applied whether in level, climbing or descending flight; and the aircraft concerned have reported over a common point to follow continuously diverging tracks until some other form of separation is provided; and:
 - 1) at least 10-minute longitudinal separation exists at the point where the tracks diverge; and
 - 2) at least 5-minute longitudinal separation exists where lateral separation is achieved; and
 - 3) lateral separation will be achieved at or before the next significant point (normally ten degrees of longitude along track(s)) or, if not, within 90 minutes of the time the second aircraft passes the common point or within 1 112 km (600 NM) of the common point, whichever is estimated to occur first.

Note.— The minima contained in 6.2.2.1 b) are in addition to those found in the PANS-ATM, 5.4.2.4.

6.2.2.2 Minimum longitudinal separation between non-turbo-jet aircraft shall be:

- a) 30 minutes; and
- b) 20 minutes in the West Atlantic route system (WATRS) area.

Note.— The WATRS area is defined beginning at a point 2700N 7700W direct to 2000N 6700W direct to 1800N 6200W direct to 1800N 6000W direct to 3830N 6000W direct to 3830N 6915W, thence counterclockwise along the New York Oceanic control area/FIR boundary to the Miami Oceanic control area/FIR boundary, thence southbound along the Miami Oceanic control area/FIR boundary to the point of beginning.

6.2.3 Composite

Nil.

6.2.4 Vertical

6.2.4.1 Between FL 290 and FL 410 inclusive, 300 m (1 000 ft) vertical separation shall be applied in the NAT Region.

6.2.4.2 At or above FL 450, vertical separation between supersonic aircraft, and between supersonic aircraft and any other aircraft, shall be considered to exist if the flight levels of the two aircraft differ by at least 1 200 m (4 000 ft).

6.2.5 Radar

Nil.

6.2.6 Reduction in separation minima

(A11 – Chapter 3; P-ATM – Chapter 5)

6.2.6.1 Where, circumstances permitting, separation minima lower than those specified in 6.2.1 and 6.2.2 will be applied in accordance with the PANS-ATM, appropriate information should be published in AIPs so that users of the airspace are fully aware of the portions of airspace where the reduced separation minima will be applied and of the navigation aids on which those minima are based.

6.2.7 Airspace reservations

6.2.7.1 Separation minima between moving temporary airspace reservations

6.2.7.1.1 Lateral separation shall be:

- a) 110 km (60 NM) between the closest tracks of any aircraft for which the airspace is reserved, provided all aircraft or formation flights meet the MNPS; or
- b) 223 km (120 NM) between the closest tracks of any aircraft for which the airspace is reserved, except that in the New York oceanic control area (OCA) west of 60°W, 167 km (90 NM) may be applied.

Note.— A formation flight with at least one of the aircraft in the formation meeting MNPS is deemed to meet the requirement for the application of 110 km (60 NM) in a).

6.2.7.1.2 Longitudinal separation shall be 60 minutes.

6.2.7.2 Separation minima between stationary temporary airspace reservations

6.2.7.2.1 Lateral separation shall be:

- a) 110 km (60 NM) between the boundaries of stationary temporary airspace reservations, provided the requesting agencies have guaranteed to confine their activities to the requested airspace, except that in the New York OCA west of 60°W, 84 km (45 NM) may be applied; or
- b) 223 km (120 NM) between the boundaries of the airspace reservations, if no guarantees have been given, except that in the New York OCA west of 60°W, 167 km (90 NM) may be applied.

6.2.7.3 Separation minima between moving temporary airspace reservations and other aircraft**6.2.7.3.1 Lateral separation shall be:**

- a) 110 km (60 NM) between the track of an aircraft operating under the control of the ATC unit concerned and the closest track of any of the aircraft for which the airspace is reserved, provided all aircraft meet the MNPS requirements and a portion of the route of the aircraft is within, above or below MNPS airspace; or
- b) 110 km (60 NM) between the track of an aircraft operating under the control of the ATC unit concerned and the track of a formation flight for which the airspace has been reserved, provided at least one aircraft in the formation and the aircraft operating under the control of the ATC unit meet the MNPS requirements and a portion of the route of the aircraft is within, above or below MNPS airspace; or
- c) 223 km (120 NM) between the track of an aircraft operating under the control of the ATC unit concerned and the closest track of any of the aircraft for which the airspace is reserved, except that in the New York OCA west of 60°W, 167 km (90 NM) may be applied.

6.2.7.4 Separation minima between stationary temporary airspace reservations and other aircraft**6.2.7.4.1 Lateral separation shall be:**

- a) 56 km (30 NM) between the track of an aircraft operating under the control of the ATC unit concerned or as part of a moving airspace reservation and the nearest limit of the reserved airspace, provided the aircraft meets the MNPS requirements and a portion of the route of the aircraft is within, above or below MNPS airspace and the requesting agency has guaranteed to confine its activities to the requested airspace; or
- b) 110 km (60 NM) between the track of an aircraft operating under the control of the ATC unit concerned or as part of a moving airspace reservation and the nearest limit of the reserved airspace, provided the aircraft meets the MNPS requirements and a portion of the route of the aircraft is within, above or below MNPS airspace and the requesting agency has **not** guaranteed to confine its activities to the requested airspace; or
- c) 110 km (60 NM) between the track of an aircraft operating under the control of the ATC unit concerned or as part of a moving airspace reservation and the nearest limit of the reserved airspace, when the aircraft does **not** meet the MNPS requirements and the requesting agency has guaranteed to confine its activities to the requested airspace, except that in the New York OCA west of 60°W, 84 km (45 NM) may be applied; or
- d) 223 km (120 NM) between the track of an aircraft operating under the control of the ATC unit concerned or as part of a moving airspace reservation and the nearest limit of the reserved airspace, when the aircraft does **not** meet the MNPS requirements and the requesting agency has **not** guaranteed to confine its activities to the requested airspace, except that in the New York OCA west of 60°W, 167 km (90 NM) may be applied.

6.3 MINIMUM FLIGHT LEVEL

6.3.1 Establishment

Nil.

6.4 ATS ROUTES

6.4.1 Track systems

6.4.1.1 Establishment and use of organized track system (OTS)

6.4.1.1.1 When necessary in order to permit the optimum use of the airspace, the area control centres serving Gander Oceanic, New York Oceanic, Santa Maria Oceanic and Shanwick Oceanic control areas may, subject to coordination with each other and, when appropriate, with Reykjavik area control centre, establish an organized track system. The procedures in 6.4.1.1.2 and 6.4.1.1.3 shall then be applied.

6.4.1.1.2 Operators conducting scheduled or non-scheduled flight operations at or above FL 280 within Gander Oceanic, New York Oceanic, Shanwick Oceanic and Santa Maria (North of 30°N) Oceanic control areas shall provide information to the area control centres concerned regarding the tracks likely to be requested by turbo-jet aircraft during peak traffic periods. Such information shall be provided as far in advance of the anticipated peak periods as practicable and as specified in appropriate aeronautical information publications.

6.4.1.1.3 Based on the above information, an OTS may be established. The location of the organized tracks will depend on traffic demand and other relevant factors. The related organized track messages will be disseminated to operators by Shanwick Oceanic area control centre for the predominantly westbound flow of air traffic and by Gander Oceanic area control centre for the predominantly eastbound flow of air traffic. These messages shall be disseminated at least three hours in advance of each anticipated peak traffic period. Any subsequent change made to the track system shall be notified to the operators as soon as possible.

6.4.1.2 Mandatory carriage of the OTS message

6.4.1.2.1 All aircraft operating in or above MNPS airspace shall carry a copy of the current OTS message.

6.4.1.3 Flights along the northern or southern boundaries of Gander Oceanic and Shanwick Oceanic flight information regions

6.4.1.3.1 Aircraft operating along tracks through successive points situated on the northern or southern boundaries of Gander Oceanic and Shanwick Oceanic flight information regions shall be provided with air traffic services by Gander or Shanwick area control centre as appropriate.

6.4.2 RNAV

Nil.

6.5 AERODROME OPERATIONS

6.5.1 Area of applicability

Nil.

6.5.2 Intersection take-off

Nil.

6.5.3 Multiple line-ups on the same runway

Nil.

6.5.4 Visual departures

Nil.

6.5.5 Visual approaches

Nil.

6.6 RNAV PROCEDURES

6.6.1 General

Nil.

6.6.2 En route

Nil.

6.6.3 Terminal

Nil.

6.6.4 State aircraft

Nil.

6.7 RNP PROCEDURES**6.7.1 General**

Nil.

6.7.2 En route

Nil.

6.7.3 Terminal

Nil.

6.7.4 State aircraft

Nil.

6.8 COMPOSITE PROCEDURES

Nil.

6.9 MNPS PROCEDURES

6.9.1 Aircraft not meeting the requirements of 4.1.1.5.1 shall not be allowed to operate in MNPS airspace.

6.9.2 An operator who experiences reduced navigation performance shall inform air traffic control (ATC) as soon as practicable.

6.10 RVSM PROCEDURES**6.10.1 General**

Nil.

6.10.2 Transition to/from RVSM airspace

Nil.

6.11 ATS COORDINATION**6.11.1 Between units providing area control services**

Nil.

6.11.2 RNAV

Nil.

6.11.3 RNP

Nil.

6.11.4 RVSM

Nil.

6.11.5 SSR codes

Nil.

6.12 ATS MESSAGES**6.12.1 Flight plan and departure**
(P-ATM – Chapter 11)

6.12.1.1 Filed flight plan messages for flights intending to operate within the NAT Region at a distance of 110 km (60 NM) or less from the northern and southern boundaries of Gander Oceanic and Shanwick Oceanic FIRs shall be addressed to the ACCs in charge of the NAT FIRs along the route and, in addition, to the ACCs in charge of the nearest adjacent NAT FIRs.

6.12.1.2 For flights departing from points within adjacent regions and entering the NAT Region without intermediate stops, filed flight plan messages shall be transmitted to the appropriate ACCs immediately after the flight plan has been submitted.

6.12.2 Arrival

Nil.

6.12.3 Boundary estimates

Nil.

6.12.4 Computer-assisted coordination

Nil.

6.13 FLIGHT INFORMATION SERVICE (FIS)**6.13.1 Automatic terminal information services (ATIS)**

Nil.

6.13.2 SIGMETs

(P-ATM – Chapter 9)

6.13.2.1 SIGMET information shall be transmitted to aircraft by VOLMET broadcast, by a general call to a group of aircraft, or by directed transmission to individual aircraft, as determined by the appropriate ACC according to the circumstances, bearing in mind the need to ensure timely receipt of the information by the aircraft and to keep the load on the HF en-route communications channels to a minimum.

6.13.2.2 SIGMET information passed to aircraft shall cover a portion of the route up to two hours' flying time ahead of the aircraft.

6.13.3 Special air-reports

Nil.

6.13.4 Amended aerodrome forecasts

(P-ATM – Chapter 9)

6.13.4.1 Amended aerodrome forecasts shall be passed to aircraft within 60 minutes from the aerodrome of destination, unless the information has been made available through other means.

6.13.5 Landing forecasts

Nil.

6.14 ALERTING SERVICE

Nil.

Chapter 7. SAFETY MONITORING

7.1 STRATEGIC LATERAL OFFSET PROCEDURES (SLOP)

Nil.

7.2 AIRSPACE MONITORING

7.2.1 General

Nil.

7.2.2 RNAV

7.2.2.1 MNPS

7.2.2.1.1 Adequate monitoring of flight operations in the NAT Region shall be conducted to assist in the assessment of continuing compliance of aircraft with the lateral navigation capabilities specified in 4.1.1.5.1.

Note.— Monitoring will be conducted in accordance with the appropriate guidance material issued by ICAO.

7.2.3 RNP

Nil.

7.2.4 RVSM

7.2.4.1 Adequate monitoring of flight operations in the NAT Region shall be conducted to assist in the assessment of continuing compliance of aircraft with height-keeping requirements.

Chapter 8. AIR TRAFFIC FLOW MANAGEMENT (ATFM)

8.1 PROVISION

Nil.

8.2 APPLICATION

Nil.

8.3 EXEMPTIONS FROM ATFM SLOT ALLOCATION

Nil.

8.4 DEPARTURE SLOT MONITORING

Nil.

8.5 PROMULGATION OF ATFM MEASURES

8.5.1 Strategic ATFM measures

Nil.

8.5.2 Amendments to promulgated strategic ATFM measures

Nil.

8.5.3 ATFM circulars and information

Nil.

8.5.4 Pre-flight information bulletin (PIB)

Nil.

8.5.5 Query procedures

Nil.

Chapter 9. SPECIAL PROCEDURES

9.1 EMERGENCY DESCENT PROCEDURES

(P-ATM – Chapter 15)

9.1.1 Action by the pilot-in-command

9.1.1.1 Descent through the MNPS airspace

9.1.1.1.1 An aircraft that is not MNPS/RVSM-approved and is unable to maintain a flight level above MNPS/RVSM airspace should descend to a flight level below MNPS/RVSM airspace.

9.1.1.1.2 An aircraft compelled to make a descent through MNPS airspace, whether continuing to destination or turning back, should, if its descent will conflict with an organized track:

- a) plan to descend to a level below FL 280;
- b) prior to passing FL 410, proceed to a point midway between a convenient pair of organized tracks prior to entering that track system from above;
- c) while descending between FL 410 and FL 280, maintain a track that is midway between and parallel with the organized tracks; and
- d) contact ATC as soon as practicable and request a revised ATC clearance.

9.1.2 Action by the ATS unit

Nil.

9.2 CONTINGENCY PROCEDURES INCLUDING TURN-BACKS

Nil.

9.3 AIR-GROUND COMMUNICATION FAILURE

(A2 – Chapter 3; P-ATM – Chapter 15; P-OPS, Vol. I)

Note.— The following procedures are intended to provide general guidance for aircraft operating into or from the NAT Region experiencing a communications failure. These procedures are intended to complement and not supersede Annex 2, the PANS-ATM and State procedures/regulations. It is not possible to provide guidance for all situations associated with a communications failure.

General

9.3.1 The pilot shall attempt to contact either another aircraft or any ATC facility and inform it of the difficulty and request that information be relayed to the ATC facility with whom communications are intended.

Communications failure prior to entering NAT Region

9.3.2 If operating with a received and acknowledged oceanic clearance, the pilot shall enter oceanic airspace at the cleared oceanic entry point, level and speed and proceed in accordance with the received and acknowledged oceanic clearance. Any level or speed changes required to comply with the oceanic clearance shall be completed within the vicinity of the oceanic entry point.

9.3.3 If operating without a received and acknowledged oceanic clearance, the pilot shall enter oceanic airspace at the first oceanic entry point, level and speed, as contained in the filed flight plan, and proceed via the filed flight plan route to landfall. That first oceanic level and speed shall be maintained to landfall.

*Communications failure prior to exiting NAT Region –
Cleared on filed flight plan route*

9.3.4 The pilot shall proceed in accordance with the last received and acknowledged oceanic clearance, including level and speed, to the last specified oceanic route point, normally landfall, and then continue on the filed flight plan route. The pilot shall maintain the last assigned oceanic level and speed to landfall and, after passing the last specified oceanic route point, shall conform with the relevant State procedures/regulations.

*Communications failure prior to exiting NAT Region –
Cleared on other than filed flight plan route*

9.3.5 The pilot shall proceed in accordance with the last received and acknowledged oceanic clearance, including level and speed, to the last specified oceanic route point, normally landfall. After passing this point, the pilot shall conform with the relevant State procedures/regulations and rejoin the filed flight plan route by proceeding, via the published ATS route structure where possible, to the next significant point ahead as contained in the filed flight plan.

Note.— The relevant State procedures/regulations to be followed by aircraft in order to rejoin its filed flight plan route are specified in detail in the appropriate national Aeronautical Information Publication.

9.4 DEGRADATION OR FAILURE OF THE RNAV SYSTEM**9.4.1 Action by the pilot-in-command**

Nil.

9.4.2 Action by the ATS unit

Nil.

9.5 LOSS OF VERTICAL NAVIGATION PERFORMANCE REQUIRED FOR RVSM**9.5.1 General**

Nil.

9.5.2 Degradation of aircraft equipment – pilot reported

Nil.

9.5.3 Severe turbulence – not forecast

Nil.

9.5.4 Severe turbulence – forecast

Nil.

9.6 EN-ROUTE DIVERSION**9.6.1 En-route diversion across the prevailing NAT air traffic flow**

9.6.1.1 Before diverting across the flow of adjacent traffic, the aircraft should climb above FL 410 or descend below FL 280 using the procedures specified in 15.2.2 of the PANS-ATM. However, if the pilot is unable or unwilling to do so, the aircraft should be flown at a level as defined in 15.2.2.3 b) 4) of the PANS-ATM for the diversion until a revised ATC clearance is obtained.

9.7 INTER-REGION INTERFACE FOR NON-RVSM-APPROVED AIRCRAFT

Nil.

9.8 MANNED BALLOON FLIGHTS

9.8.1 Manned balloon flights authorized to operate in the NAT Region shall operate outside the MNPS airspace.

9.8.2 Within the NAT Region, manned balloons shall have a communications capability in accordance with Annex 2.

Chapter 10. PHRASEOLOGY

10.1 RNAV

Nil.

10.2 RNP

Nil.

10.3 SURVEILLANCE

Nil.

10.4 AERODROME OPERATIONS

Nil.

10.5 ATFM

Nil.

Chapter 11. SEARCH AND RESCUE

11.1 INTERNATIONAL GENERAL AVIATION (IGA)

Nil.

11.1.1 International general aviation (IGA) shall be equipped with functioning two-way radio communications equipment except that, under special local circumstances, the appropriate authorities may grant exemption from this requirement.

Chapter 12. METEOROLOGY

12.1 AIRCRAFT OBSERVATIONS AND REPORTS

12.1.1 When voice communications are used, oceanic area control centres shall designate, from among the aircraft intending to operate on the organized tracks, those which shall be required to report routine meteorological observations at each prescribed reporting point. This designation shall be made by the oceanic area control centre delivering the oceanic clearance, using the phrase "SEND MET REPORTS", and should normally be made so as to designate one aircraft per track at approximately hourly intervals.

Note.— When air-ground data link is being used for meteorological reporting during flight, no aircraft observations by voice communications are required, in accordance with Annex 3, 5.3.1.

12.1.2 When voice communications are used, all aircraft flying in the Bodø Oceanic, Søndrestrom, Reykjavik, Gander Oceanic, Shanwick Oceanic, New York Oceanic and Santa Maria Oceanic flight information regions between North America and Europe in either direction shall be required to make and report routine meteorological observations at each designated reporting point and at the intermediate mid-point between such reporting points, except that:

- a) the mid-point observation shall not be the subject of a separate report but will be retained for transmission at the next designated reporting point; and
- b) aircraft cleared on an organized track shall be required to make and report routine observations only when so designated at the time of receiving their oceanic clearance in accordance with 12.1.1 and 6.1.1.

12.1.3 When voice communications are used, the format to be used for all aircraft reports shall be in accordance with Appendix 1 to the PANS-ATM.

Chapter 13. AERONAUTICAL INFORMATION SERVICES

13.1 NOTAM ADDRESSING AND DISTRIBUTION

Nil.

13.2 AERONAUTICAL CHART INFORMATION

13.2.1 Visual procedures

Nil.

PACIFIC (PAC) REGIONAL SUPPLEMENTARY PROCEDURES

These procedures are supplementary to the provisions contained in Annex 2, Annex 6 (Part II), Annex 11, PANS-ATM (Doc 4444) and PANS-OPS (Doc 8168). The area of application of the PAC Regional Supplementary Procedures is included on the Index to Application of Supplementary Procedures chart.

TABLE OF CONTENTS

	<i>Chapter</i>	<i>Page</i>
Flight Rules	1	PAC 1-1
Flight Plans	2	PAC 2-1
Communications	3	PAC 3-1
Navigation	4	PAC 4-1
Surveillance	5	PAC 5-1
Air Traffic Services	6	PAC 6-1
Safety Monitoring	7	PAC 7-1
Air Traffic Flow Management	8	PAC 8-1
Special Procedures	9	PAC 9-1
Phraseology	10	PAC 10-1
Search and Rescue	11	PAC 11-1
Meteorology	12	PAC 12-1
Aeronautical Information Services	13	PAC 13-1

Chapter 1. FLIGHT RULES

1.1 VISUAL FLIGHT RULES (VFR)

(A2 – Chapter 4)

1.1.1 Special application

1.1.1.1 Outside the Oakland Oceanic FIR, VFR flights to be operated in specified portions of terminal control areas (TMAs) of selected aerodromes serving international flights shall:

- a) have two-way radio communications;
- b) obtain clearance from the appropriate ATC unit; and
- c) report positions, as required.

Note.— The phrase “specified portions of terminal control areas” is intended to signify at least those portions of the TMA used by international IFR flights in association with approach, holding, departure and noise abatement procedures.

1.2 INSTRUMENT FLIGHT RULES (IFR)

(A2 – Chapters 2 and 5)

Note.— Annex 2, 2.2, permits a flight to operate using either instrument flight rules or visual flight rules when operated in visual meteorological conditions subject to the limitations listed in Chapter 4 of the Annex. The following indicates additional restrictions.

1.2.1 Special application

1.2.1.1 Flights shall be conducted in accordance with instrument flight rules when operated more than 185 km (100 NM) seaward from the shoreline within controlled airspace.

1.2.2 Flight level changes

(A2 – Chapter 5)

1.2.2.1 All changes of flight levels required by transition from the system of designated cruising levels for flights along controlled routes to the semicircular system of cruising levels, or vice versa, shall be made at points within controlled airspace.

1.3 AIR TRAFFIC ADVISORY SERVICE

Nil.

Chapter 2. FLIGHT PLANS

2.1 CONTENT – GENERAL

(A-2, Chapter 3; P-ATM – Chapter 4 and Appendix 2)

2.1.1 Date of flight

Nil.

2.1.2 Area navigation (RNAV) specifications

Nil.

2.1.3 Required navigation performance (RNP) specifications

2.1.3.1 The letter R shall be inserted in Item 10 (Equipment) of the flight plan to indicate the aircraft meets the RNP type prescribed, has been appropriately approved and can comply with all conditions of that approval for all operations in airspace or on ATS routes where an RNP type has been designated.

2.1.4 Minimum navigation performance specifications (MNPS)

Nil.

2.1.5 Reduced vertical separation minimum (RVSM)-approved aircraft

2.1.5.1 The letter W shall be inserted in Item 10 (Equipment) of the flight plan if the aircraft and operator have received RVSM State approval, regardless of the requested flight level. The aircraft registration shall be inserted in Item 18 of the flight plan.

2.1.6 Non-RVSM-approved aircraft

Nil.

2.1.7 Non-RVSM-approved State aircraft

Nil.

2.1.8 Indication of 8.33 kHz channel spacing capability

Nil.

2.1.9 Route

Nil.

2.1.10 Estimated times

Nil.

2.1.11 Mach number

2.1.11.1 For turbo-jet aircraft intending to operate within the Anchorage Oceanic and Oakland Oceanic FIRs, the planned true Mach number shall be specified in Item 15 of the flight plan.

2.1.12 Alternative flight level

Nil.

2.1.13 Special handling (STS)

Nil.

2.2 CONTENT – AIR TRAFFIC FLOW MANAGEMENT (ATFM)**2.2.1 Runway visual range (RVR)**

Nil.

2.2.2 Flight plan addressing and distribution

Nil.

2.2.3 Slot allocation exemptions

Nil.

2.3 SUBMISSION**2.3.1 General**

Nil.

2.3.2 Amendments

Nil.

2.4 REPETITIVE FLIGHT PLANS (RPLs)

Nil.

Chapter 3. COMMUNICATIONS

3.1 AIR-GROUND COMMUNICATIONS AND IN-FLIGHT REPORTING

3.1.1 Communications equipment

Nil.

3.1.2 Continuous listening watch in uncontrolled airspace

(A2 – Chapters 3 and 5; P-ATM – Chapter 4)

3.1.2.1 All VFR flights, and IFR flights outside controlled airspace, shall maintain a listening watch on the frequency where flight information service is provided and report position unless otherwise authorized by the State overflown.

3.1.3 Position reports

Time or place

(A2 – Chapters 3 and 5; P-ATM – Chapter 4)

3.1.3.1 States should establish reporting points at locations fulfilling operational requirements as set forth in Annex 11, 2.13.1, 2.13.3 and Appendix 2. Except where operational considerations dictate otherwise, those points should be located at intervals of 5 degrees of latitude or longitude (latitude if the route is predominantly north-south, longitude if east-west).

3.1.3.2 Within the Anchorage Oceanic, Auckland Oceanic, Nadi, Oakland Oceanic (excluding the Honolulu terminal area), and Tahiti control areas/FIRs, flights shall provide position reports as follows:

- a) if operating on a fixed route, report over designated reporting points using the specified name of such points;
- b) if operating on a route without designated reporting points, aircraft traversing 10 degrees of latitude or longitude in 1 hour and 20 minutes or less should normally be required to report only at 10-degree intervals. Slower aircraft should normally be required to report at 5-degree intervals.

Transmission

(P-ATM – Chapter 4)

3.1.3.3 The last position report before passing from one FIR to an adjacent FIR shall also be made to the ATS unit serving the airspace about to be entered.

3.1.3.4 Responsibility for the transmission of position reports to the additional ATS units specified in 3.1.3.3 may be delegated to the appropriate communications station(s) through local arrangements.

Position and time

(P-ATM – Chapter 4)

3.1.3.5 Verbal position reports shall be identified by the spoken word “position” transmitted immediately before or after the aircraft call sign/identification.

3.1.3.6 The position of the aircraft shall be transmitted in reference to a reporting point name, name-code designator or, if not named:

- a) for flights operating in a predominantly east-west direction:
 - 1) latitude in degrees and minutes; and
 - 2) longitude in degrees only;
- b) for flights operating in a predominantly north-south direction:
 - 1) latitude in degrees only; and
 - 2) longitude in degrees and minutes.

3.1.3.7 The time at which the aircraft is over the reporting point shall be transmitted in four digits, giving both the hour and the minutes.

Next position and time over

3.1.3.8 Estimated time over next position shall be expressed in four digits.

3.1.4 Abbreviated position reports

Nil.

3.1.5 Read-back of VHF channels

Nil.

3.2 MANDATORY CARRIAGE OF 8.33 KHZ CHANNEL SPACING CAPABLE RADIO EQUIPMENT

Nil.

3.3 CONTROLLER-PILOT DATA LINK COMMUNICATIONS (CPDLC)

Nil.

3.4 SATELLITE VOICE COMMUNICATIONS (SATCOM)

Nil.

3.5 AERONAUTICAL MOBILE SERVICE

3.5.1 Selective calling (SELCAL)

Nil.

3.5.2 HF operations

Nil.

3.6 AERONAUTICAL FIXED SERVICE

3.6.1 AFTN rationalization

3.6.1.1 To support data communication requirements and to provide needed data integrity and minimal transit time, the CCITT X.25 protocol should be used between Main AFTN COM Centres and between Main and Tributary COM Centres.

3.7 RADIO CHANNELS/FREQUENCIES

Nil.

Chapter 4. NAVIGATION

4.1 PERFORMANCE-BASED NAVIGATION (PBN)

Note.— As the Pacific (PAC) Region transitions to PBN as contained in the Performance-based Navigation Manual (Doc 9613), the contents of 4.1 will be amended.*

4.1.1 Area navigation (RNAV) specifications

4.1.1.1 RNAV 10 (RNP 10)

Note.— RNAV 10 retains the RNP 10 designation, as specified in the Performance-based Navigation Manual (Doc 9613), 1.2.3.5.*

Area of applicability

4.1.1.1.1 For flights on designated controlled oceanic routes or areas within the Anchorage Arctic, Anchorage Continental, Anchorage Oceanic, Auckland Oceanic, Nadi, Oakland Oceanic and Tahiti FIRs, a lateral separation minimum of 93 km (50 NM) may be applied.

4.1.1.1.2 For flights on designated controlled oceanic routes or areas within the Anchorage Arctic, Anchorage Continental, Anchorage Oceanic, Auckland Oceanic, Nadi, Oakland Oceanic and Tahiti FIRs, a longitudinal separation minimum of 93 km (50 NM) derived by RNAV may be applied between RNAV-equipped aircraft approved to RNP 10 or better, in accordance with the provisions of the PANS-ATM, 5.4.2.6.

Means of compliance

4.1.1.1.3 For application of 4.1.1.1.1 and 4.1.1.1.2, the aircraft and the operator must have been approved by the State of Registry or the State of the Operator, as appropriate, to meet the following requirements (or equivalent):

- a) aircraft navigation performance shall be such that the standard deviation of lateral tracks shall be less than 8.7 km (4.7 NM) (or the aircraft approved to RNP 10); and
- b) operator programmes shall be established to mitigate the occurrence of large navigational errors due to equipment malfunction or operational error:
 - 1) operator in-flight operating drills shall include mandatory navigation cross-checking procedures to identify navigation errors in sufficient time to prevent aircraft from inadvertent deviation from ATC-cleared route; and
 - 2) the operator shall establish programmes to provide for the continued airworthiness of aircraft navigation systems necessary to navigate to the degree of accuracy required.

* In preparation.

4.1.1.2 RNAV 5

Nil.

4.1.1.3 RNAV 2

Nil.

4.1.1.4 RNAV 1

Nil.

4.1.1.5 Pre-PBN navigation specifications**4.1.1.5.1 Composite**

(A11 – Chapter 3)

Area of applicability

4.1.1.5.1.1 For aircraft operating at or above FL 290 within the flexible Pacific Organized Track Systems (PACOTS), North Pacific (NOPAC) route system between the United States and Japan and the route system between Hawaii and the west coast of the United States, within the Fukuoka, Oakland Oceanic and Anchorage Oceanic FIRs, composite separation consisting of a combination of at least 93 km (50 NM) lateral and 300 m (1 000 ft) vertical separation may be applied.

4.1.2 Required navigation performance (RNP) specifications**4.1.2.1 RNP 4***Area of applicability*

4.1.2.1.1 For flights on designated controlled oceanic routes or areas within the Anchorage Arctic, Anchorage Continental, Anchorage Oceanic, Auckland Oceanic, Nadi, Oakland Oceanic and Tahiti FIRs, a lateral separation minimum of 55.5 km (30 NM) may be applied.

4.1.2.1.2 For flights on designated controlled oceanic routes or areas within the Anchorage Arctic, Anchorage Continental, Anchorage Oceanic, Auckland Oceanic, Nadi, Oakland Oceanic and Tahiti FIRs, a longitudinal separation minimum of 55.5 km (30 NM) derived by RNAV may be applied between RNAV-equipped aircraft approved to RNP 4 or better, in accordance with the provisions of the PANS-ATM, 5.4.2.6.

Means of compliance

4.1.2.1.3 Aircraft must be approved by the State of Registry or the State of the Operator to RNP 4.

4.1.2.2 Basic RNP 1

Nil.

4.1.2.3 Advanced RNP 1

Nil.

4.2 REDUCED VERTICAL SEPARATION MINIMUM (RVSM)**Area of applicability**

4.2.1 RVSM shall be applicable in that volume of airspace between FL 290 and FL 410 inclusive in the following FIRs:

Anchorage Arctic, Anchorage Continental, Anchorage Oceanic, Auckland Oceanic, Easter Island, Los Angeles, Nadi, Oakland, Oakland Oceanic, Seattle, Tahiti and Vancouver.

Means of compliance

(A2 – Chapter 5 and Appendix 3; A6, Part I – Chapters 3, 4 and 7;
A6, Part II – Chapters 3 and 7; A8, Part IIIA – Chapter 8; A11 – Chapter 2)

4.2.2 Operators intending to conduct flights within the PAC Region where RVSM is applied shall require an RVSM approval either from the State of Registry or the State of the Operator. The State of Registry or the State of the Operator, as appropriate, should verify that the height-keeping performance capability of approved aircraft meets the requirements specified in Annex 6, Parts I and II.

Chapter 5. SURVEILLANCE

(P-ATM – Chapter 8; P-OPS, Vol. I, Part III)

5.1 SECONDARY SURVEILLANCE RADAR (SSR)

5.1.1 Carriage of pressure-altitude reporting SSR transponders

5.1.1.1 All aircraft shall be equipped with a pressure-altitude reporting transponder of a type certified by the State as meeting the relevant provisions of Annex 10.

5.1.2 Code allocation methodology

Nil.

5.1.3 Assignment of SSR codes

Nil.

5.1.4 Operation of pressure-altitude reporting SSR transponders

Nil.

5.1.5 Monitoring of SSR-derived information

Nil.

5.2 SSR MODE S

5.2.1 Carriage and operation of SSR Mode S

Nil.

5.2.2 Transition between Mode A/C and Mode S

Nil.

5.3 AIRBORNE COLLISION AVOIDANCE SYSTEMS (ACAS)

5.3.1 Carriage and operation of ACAS II

Nil.

5.4 AUTOMATIC DEPENDENT SURVEILLANCE – CONTRACT (ADS-C)

Nil.

5.5 AUTOMATIC DEPENDENT SURVEILLANCE – BROADCAST (ADS-B)

Nil.

Chapter 6. AIR TRAFFIC SERVICES

6.1 AIR TRAFFIC CONTROL (ATC) CLEARANCES

6.1.1 Content

(A11 – Chapter 3; P-ATM – Chapters 4 and 11)

6.1.1.1 The ATC-approved true Mach number shall be included in each clearance given to subsonic turbo-jet aircraft operating within the Anchorage Oceanic and Oakland Oceanic FIRs, when Mach number technique is to be applied.

6.1.2 Adherence

(A2 – Chapter 3)

6.1.2.1 If an aircraft on a long over-water flight has inadvertently deviated from the route specified in its ATC clearance, it shall forthwith take action to regain such route within 370 km (200 NM) from the position at which the deviation was observed.

6.2 SEPARATION

(A11 – Attachment B; P-ATM – Chapters 5 and 15)

6.2.1 Lateral

6.2.1.1 The minimum lateral separation shall be 185 km (100 NM), except:

- a) where aircraft are transiting into an airspace with a larger lateral minimum than the airspace being exited, provided:
 - 1) the smaller separation minimum exists;
 - 2) flight paths diverge by 15 degrees or more until the larger minimum is established; and
 - 3) it is possible to ensure, by means approved by the appropriate ATS authority, that the aircraft have the navigation capability necessary to ensure accurate track guidance; or
- b) that the lower minima in 5.4.1.2 of the PANS-ATM may be applied, or further reduced in accordance with 5.11 of the PANS-ATM, where the conditions specified in the relevant PANS-ATM provisions are met.

6.2.1.2 The minimum lateral separation shall be 93 km (50 NM) between aircraft meeting the provisions in 4.1.1.1.

6.2.1.3 The minimum lateral separation shall be 55.5 km (30 NM) between aircraft meeting the provisions in 4.1.2.1, provided:

- a) the aircraft are approved by the State of Registry or the State of the Operator to RNP 4;
- b) direct controller-pilot voice communications or controller-pilot data link communications (CPDLC) are maintained;
- c) surveillance is maintained using an automatic dependent surveillance (ADS) system; and
- d) an ADS lateral deviation change event contract is established, with a lateral deviation threshold of 9.3 km (5 NM).

6.2.2 Longitudinal

(P-ATM, Chapters 5 and 13)

6.2.2.1 Except as provided for in 6.2.2.2, the minimum longitudinal separation between turbo-jet aircraft operating within Anchorage Oceanic, Auckland Oceanic, Nadi, Oakland Oceanic and Tahiti FIRs shall be in accordance with the PANS-ATM, 5.4.2.4 or 5.4.2.5.

6.2.2.2 The minimum longitudinal separation shall be 93 km (50 NM) derived by RNAV between aircraft meeting the provisions in 4.1.1.1.

Note.— The provision of the PANS-ATM, 5.4.2.6.1 to 5.4.2.6.3, apply in all cases. Where ADS is not available, the provisions of the PANS-ATM, 5.4.6.3 apply. Where ADS is available, the provisions of the PANS-ATM, 5.4.6.4 apply.

6.2.2.3 The minimum longitudinal separation shall be 55.5 km (30 NM) between aircraft meeting the provisions in 4.1.2.1.

Note.— ADS is required for the application of this minimum; therefore, the applicable provisions will be those of the PANS-ATM, 5.4.2.6.1 to 5.4.2.6.3, and 5.4.2.6.4.

6.2.3 Composite

6.2.3.1 Composite separation consisting of a combination of at least 93 km (50 NM) lateral and 300 m (1 000 ft) vertical separation may be applied between aircraft meeting the provisions in 4.1.1.5.1.

6.2.3.2 The type of separation in 6.2.3.1 may be applied between aircraft operating in the same direction or opposite directions (see also 6.8).

6.2.4 Vertical

6.2.4.1 An RVSM of 300 m (1 000 ft) shall be applied between FL 290 and FL 410 inclusive within the FIRs specified in 4.2.1.

6.2.4.2 The minimum separation of 6.2.4.1 shall only be applied between aircraft where those aircraft and the operator have been approved by the State of Registry or the State of the Operator, as appropriate, to conduct flights in RVSM airspace.

6.2.4.3 Aircraft that have not received RVSM State approval may be cleared to operate in airspace where RVSM may be applied in accordance with policy and procedures established by the State provided that 600 m (2 000 ft) vertical separation is applied.

6.2.5 Radar

Nil.

6.2.6 Reduction in separation minima

(A11 – Chapter 3; P-ATM – Chapter 5)

6.2.6.1 Where, circumstances permitting, separation minima lower than those specified in 6.2.1 and 6.2.2 will be applied in accordance with the PANS-ATM, appropriate information should be published in AIPs so that users of the airspace are fully aware of the portions of airspace where the reduced separation minima will be applied and of the navigation aids on which those minima are based.

6.2.7 Airspace reservations

Nil.

6.3 MINIMUM FLIGHT LEVEL

(P-ATM – Chapter 4; O-OPS, Vol. I)

6.3.1 Establishment

6.3.1.1 The lowest useable flight level shall be calculated from actual QNH, unless the pressure variation is so small that reference to climatological data is acceptable.

Note 1.— The lowest useable flight level will provide a terrain clearance of at least 300 m (1 000 f).

Note 2.— MET Offices will inform ATS units when, in abnormal conditions, pressure goes below the minimum climatological value, in order that appropriate steps can be taken to cancel temporarily the use of the lowest flight level or levels that would not ensure the minimum terrain clearance.

6.3.1.2 Based on current and anticipated atmospheric pressure distribution, area control centres shall coordinate, when required, the lowest flight level to be used.

6.4 ATS ROUTES

6.4.1 Track systems

6.4.1.1 Flexible Pacific Organized Track Systems (PACOTS)

6.4.1.1.1 To optimize the use of airspace across the Northern, Central and South Pacific, flexible organized track systems may be established within the Fukuoka, Oakland Oceanic, Anchorage Oceanic, Nadi, Tahiti, Auckland Oceanic, Melbourne, Brisbane and Port Moresby FIRs.

6.4.1.1.2 The ACCs providing air traffic service within the concerned FIRs shall provide information to users regarding the PACOTS tracks generated for use. The location of the tracks will depend on traffic demand, prevailing winds, significant weather and other relevant factors. Unless otherwise stated, tracks will apply at FL 290 and above.

6.4.1.1.3 PACOTS track messages to users specifying track details will be disseminated daily by one of the ACCs. Messages will be disseminated in a timely manner to accommodate the flight planning requirements of users. Any subsequent changes will be issued promptly. Pilots are expected to flight plan in accordance with the daily track message.

Note.— PACOTS guidelines containing detailed information on track generation, lateral track spacing, level assignment, position-reporting requirements and other relevant details shall be published in the AIPs or associated supplements of those States which utilize a flexible track system within their airspace or areas of responsibility.

6.4.2 RNAV

Nil.

6.5 AERODROME OPERATIONS

6.5.1 Area of applicability

Nil.

6.5.2 Intersection take-off

Nil.

6.5.3 Multiple line-ups on the same runway

Nil.

6.5.4 Visual departures

Nil.

6.5.5 Visual approaches

Nil.

6.6 RNAV PROCEDURES**6.6.1 General**

Nil.

6.6.2 En route

Nil.

6.6.3 Terminal

Nil.

6.6.4 State aircraft

Nil.

6.7 RNP PROCEDURES**6.7.1 General**

Nil.

6.7.2 En route

Nil.

6.7.3 Terminal

Nil.

6.7.4 State aircraft

Nil.

6.8 COMPOSITE PROCEDURES

6.8.1 When composite separation is used in accordance with 6.2.3, the following procedures apply:

- a) An aircraft may be cleared to join an outer route of the system at an entry point other than the normal entry point provided:

- 1) longitudinal or non-composite vertical separation exists between that aircraft and any other on that route; and
 - 2) composite separation exists between that aircraft and any other on the next adjacent route.
- b) An aircraft may be cleared to leave an outer route of the system at an exit point other than the normal exit point provided its course diverges so that the lateral spacing from the route increases until longitudinal or non-composite lateral or non-composite vertical separation exists between that aircraft and any other aircraft in the system.
- c) An aircraft may be cleared to change from one route to an adjacent route in the system provided:
- 1) longitudinal or non-composite vertical separation exists between that aircraft and any other aircraft on the route being vacated until that aircraft is established on the route to which it is proceeding;
 - 2) longitudinal or non-composite vertical separation exists between that aircraft and any other aircraft on the route to which that aircraft is proceeding; and
 - 3) composite separation exists between that aircraft and any other aircraft on the next adjacent route.
- d) An aircraft may be cleared to cross the system provided longitudinal or non-composite lateral or non-composite vertical separation exists between that aircraft and any other aircraft in the system.
- e) An aircraft may be cleared to change altitude on a route if longitudinal or non-composite vertical separation exists between that aircraft and any other aircraft on adjacent routes.

Note.— Non-composite separation is separation in accordance with the minima in 6.2.1.1 and 6.2.2.1 and those in the PANS-ATM, 5.3.2.

6.9 MNPS PROCEDURES

Nil.

6.10 RVSM PROCEDURES

6.10.1 General

Nil.

6.10.2 Transition to/from RVSM airspace

Nil.

6.11 ATS COORDINATION

6.11.1 Between units providing area control services

(A11 – Chapter 3; P-ATM – Chapter 10)

6.11.1.1 If a flight should enter an adjacent area, information concerning any revision of the estimate of three minutes or more shall be forwarded to the adjacent area control centre normally by telephone.

6.11.2 RNAV

Nil.

6.11.3 RNP

Nil.

6.11.4 RVSM

Nil.

6.11.5 SSR codes

Nil.

6.12 ATS MESSAGES

6.12.1 Flight plan and departure

(P-ATM – Chapter 11)

6.12.1.1 Provided reliable ATS speech circuits exist between the successive ATS units concerned with the flight, departure messages may be omitted for IFR flights operated within areas or along routes designated by mutual agreements between the States concerned.

6.12.2 Arrival

Nil.

6.12.3 Boundary estimates

Nil.

6.12.4 Computer-assisted coordination

Nil.

6.13 FLIGHT INFORMATION SERVICE (FIS)**6.13.1 Automatic terminal information services (ATIS)**

Nil.

6.13.2 SIGMETs

(P-ATM – Chapter 9)

6.13.2.1 Transmission of SIGMET information to aircraft shall be at the initiative of the appropriate ATS unit, by the preferred method of directed transmission followed by acknowledgement, or by a general call when the number of aircraft would render the preferred method impracticable.

6.13.2.2 SIGMET information passed to aircraft shall cover a portion of the route up to two hours' flying time ahead of the aircraft.

6.13.3 Special air-reports

Nil.

6.13.4 Amended aerodrome forecasts

Nil.

6.13.5 Landing forecasts

Nil.

6.14 ALERTING SERVICE

Nil.

Chapter 7. SAFETY MONITORING

7.1 STRATEGIC LATERAL OFFSET PROCEDURES (SLOP)

Nil.

7.2 AIRSPACE MONITORING

7.2.1 General

Nil.

7.2.2 RNAV

7.2.2.1 The following criteria are to be used in the operational assessment of airspace system safety on routes or in areas where 93 km (50 NM) lateral separation is applied:

- a) the proportion of the total flight time spent by aircraft 46 km (25 NM) or more off the cleared track shall be less than 7.0×10^{-4} ; and
- b) the proportion of the total flight time spent by aircraft between 74 and 110 km (40 and 60 NM) off the cleared track shall be less than 4.1×10^{-5} .

7.2.3 RNP

7.2.3.1 Prior to implementation of 55.5 km (30 NM) lateral separation, States shall undertake a system verification of sufficient duration and integrity to demonstrate that the maximum acceptable rate of lateral deviations greater than or equal to 27.8 km (15 NM) will not exceed those rates listed in Table B-1 in Annex 11, Attachment B. The verification should be conducted after the minimum navigation, communication and surveillance requirements listed in Chapter 4 have been met.

7.2.3.2 Following implementation of 55.5 km (30 NM) lateral separation, a monitoring programme shall be established to periodically verify that the system's actual rate of lateral deviations greater than or equal to 27.8 km (15 NM) does not exceed the maximum prescribed in Table B-1 in Annex 11, Attachment B.

7.2.4 RVSM

7.2.4.1 The following criteria shall be used in the operational assessment of airspace system safety: the total vertical error (TVE), which is the difference between the geometric height of the aircraft and the geometric height of the flight level to which it is assigned, is required to be such that:

- a) the probability that TVE equal to or greater than 91 m (300 ft) in magnitude is equal to or less than 2×10^{-3} ;

- b) the probability that TVE equal to or greater than 152 m (500 ft) in magnitude is equal to or less than 5×10^{-6} ;
- c) the probability that TVE equal to or greater than 200 m (650 ft) in magnitude is equal to or less than 1.4×10^{-6} ;
- d) the probability that TVE between 290 m and 320 m (950 ft and 1 050 ft), inclusive, in magnitude is equal to or less than 1.7×10^{-7} ; and
- e) the portion of time that aircraft spend at incorrect flight levels, 300 m (1 000 ft), or multiples thereof, away from assigned flight levels is equal to or less than 7.1×10^{-7} .

Note.— Guidance material regarding the initial achievement and continued maintenance of the height-keeping performance in 4.2.2 is contained in the Guidance Material on the Implementation of a 300 m (1 000 ft) Vertical Separation Minimum (VSM) for Application in the Airspace of the Asia/Pacific Region.

7.2.4.2 Application of RVSM in the airspace designated in 4.2.1 shall meet a TLS of 5×10^{-9} fatal accidents per aircraft flight hour due to all causes of risk in the vertical dimension.

7.2.4.3 Adequate monitoring of flight operations in the Asia and Pacific RVSM airspace shall be conducted to assist in the assessment of continuing compliance of aircraft with the height-keeping capabilities in 4.2.2. Monitoring shall include assessment of other sources of risk to ensure that the TLS specified in 7.2.4.2 is not exceeded.

Note.— Details of the policy and procedures for monitoring established by the Asia/Pacific Air Navigation Planning and Implementation Regional Group are contained in the Guidance Material on the Implementation of a 300 m (1 000 ft) Vertical Separation Minimum (VSM) for Application in the Airspace of the Asia/Pacific Region.

Chapter 8. AIR TRAFFIC FLOW MANAGEMENT (ATFM)

8.1 PROVISION

Nil.

8.2 APPLICATION

Nil.

8.3 EXEMPTIONS FROM ATFM SLOT ALLOCATION

Nil.

8.4 DEPARTURE SLOT MONITORING

Nil.

8.5 PROMULGATION OF ATFM MEASURES

8.5.1 Strategic ATFM measures

Nil.

8.5.2 Amendments to promulgated strategic ATFM measures

Nil.

8.5.3 ATFM circulars and information

Nil.

8.5.4 Pre-flight information bulletin (PIB)

Nil.

8.5.5 Query procedures

Nil.

Chapter 9. SPECIAL PROCEDURES

9.1 EMERGENCY DESCENT PROCEDURES

9.1.1 Action by the pilot-in-command

Nil.

9.1.2 Action by the ATS unit

Nil.

9.2 CONTINGENCY PROCEDURES INCLUDING TURN-BACKS

Nil.

9.3 AIR-GROUND COMMUNICATION FAILURE

9.3.1 The following procedures apply to aircraft operating in the oceanic airspace of the Anchorage Oceanic, Auckland Oceanic, Nadi, Oakland Oceanic and Tahiti FIRs. These procedures are intended to complement and not supersede State procedures/regulations.

9.3.2 In the event of total loss of communication, an aircraft shall:

- a) try to re-establish communication by all other means;
- b) if all attempts to re-establish communication with ATC are unsuccessful:
 - 1) squawk 7600;
 - 2) if able, broadcast in the blind at suitable intervals: flight identification, flight level, aircraft position (including the ATS route designator or the track code) and intentions on the frequency in use, as well as on frequency 121.5 MHz (or, as a back-up, the VHF inter-pilot air-to-air frequency 123.45 MHz);
 - 3) watch for conflicting traffic both visually and by reference to airborne collision avoidance systems or traffic displays (if equipped);
 - 4) turn on all aircraft exterior lights (commensurate with appropriate operating limitations);
 - 5) maintain the last assigned speed and level for a period of 60 minutes following the aircraft's failure to report its position over a compulsory reporting point (including ADS-C flights), and thereafter adjust speed and altitude in accordance with the filed flight plan;

Note.— In airspace where the strategic lateral offset procedures (SLOP) has been authorized, aircraft experiencing communication failure may also elect to initiate SLOP in accordance with State AIP, including an offset of 1.8 or 3.7 km (1 NM or 2 NM) right of track.

- 6) Upon exiting oceanic airspace, conform to the relevant State procedures and regulations.

9.3.3 In the event of lost communication, ATC shall maintain separation between the aircraft having the communication failure and other aircraft, based on the assumption that the aircraft having the communication failure will operate in accordance with the procedures in 9.3.2.

9.4 DEGRADATION OR FAILURE OF THE RNAV SYSTEM

9.4.1 Action by the pilot-in-command

Nil.

9.4.2 Action by the ATS unit

Nil.

9.5 LOSS OF VERTICAL NAVIGATION PERFORMANCE REQUIRED FOR RVSM

9.5.1 General

Nil.

9.5.2 Degradation of aircraft equipment – pilot reported

Nil.

9.5.3 Severe turbulence – not forecast

Nil.

9.5.4 Severe turbulence – forecast

Nil.

9.6 EN-ROUTE DIVERSION

Nil.

9.7 INTER-REGION INTERFACE FOR NON-RVSM-APPROVED AIRCRAFT

Nil.

9.8 MANNED BALLOON FLIGHTS

Nil.

Chapter 10. PHRASEOLOGY

10.1 RNAV

Nil.

10.2 RNP

Nil.

10.3 SURVEILLANCE

Nil.

10.4 AERODROME OPERATIONS

Nil.

10.5 ATFM

Nil.

Chapter 11. SEARCH AND RESCUE

11.1 INTERNATIONAL GENERAL AVIATION (IGA)

(A6, Part II – Chapter 6; A6, Part III – Chapter 4)

11.1.1 General aviation aircraft operating over designated areas, land or sea, where search and rescue operations would be difficult, should:

- a) carry appropriate survival equipment; and
 - b) follow the routes or specified procedures if not equipped with two-way radio, except that under special circumstances, the appropriate authority may grant specific exemptions from this requirement.
-

Chapter 12. METEOROLOGY

12.1 AIRCRAFT OBSERVATIONS AND REPORTS

Nil.

Chapter 13. AERONAUTICAL INFORMATION SERVICES

13.1 NOTAM ADDRESSING AND DISTRIBUTION

Nil.

13.2 AERONAUTICAL CHART INFORMATION

13.2.1 Visual procedures

Nil.

SOUTH AMERICAN (SAM) REGIONAL SUPPLEMENTARY PROCEDURES

These procedures are supplementary to the provisions contained in Annex 2, Annex 3, Annex 6 (Parts I and II), Annex 10, Annex 11, PANS-ATM (Doc 4444) and PANS-OPS (Doc 8168). The area of application of the SAM Regional Supplementary Procedures is included on the Index to Application of Supplementary Procedures chart.

TABLE OF CONTENTS

	<i>Chapter</i>	<i>Page</i>
Flight Rules	1	SAM 1-1
Flight Plans	2	SAM 2-1
Communications	3	SAM 3-1
Navigation	4	SAM 4-1
Surveillance	5	SAM 5-1
Air Traffic Services	6	SAM 6-1
Safety Monitoring	7	SAM 7-1
Air Traffic Flow Management	8	SAM 8-1
Special Procedures	9	SAM 9-1
Phraseology	10	SAM 10-1
Search and Rescue	11	SAM 11-1
Meteorology	12	SAM 12-1
Aeronautical Information Services	13	SAM 13-1

Chapter 1. FLIGHT RULES

1.1 VISUAL FLIGHT RULES (VFR)

1.1.1 Special application

Nil.

1.2 INSTRUMENT FLIGHT RULES (IFR)

(A2 – Chapters 2 and 5)

Note.— Annex 2, 2.2, permits a flight to operate using either instrument flight rules or visual flight rules when operated in visual meteorological conditions subject to the limitations listed in Chapter 4 of the Annex. The following indicates certain additional restrictions.

1.2.1 Special application

1.2.1.1 Flights shall be conducted in accordance with instrument flight rules when operated more than 37 km (20 NM) seaward from the shoreline, for a duration of more than one hour, except that compliance with IFR minimum levels is not required during the day in visual meteorological conditions.

1.2.2 Flight level changes

Nil.

1.3 AIR TRAFFIC ADVISORY SERVICE

(P-ATM – Chapter 9)

Note.— The PANS-ATM leaves it to the discretion of the pilot whether or not to obtain air traffic advisory service, where available. Obtaining air traffic advisory service is obligatory, however, when operating in Class F airspace.

1.3.1 All IFR flights shall comply with the procedures for air traffic advisory service when operating in Class F airspace.

Chapter 2. FLIGHT PLANS

2.1 CONTENT – GENERAL

(A2 – 3.3; P-ATM – Chapter 4 and Appendix 2)

2.1.1 Date of flight

Nil.

2.1.2 Area navigation (RNAV) specifications

Nil.

2.1.3 Required navigation performance (RNP) specifications

2.1.3.1 The letter R shall be inserted in Item 10 (Equipment) of the flight plan to indicate the aircraft meets the RNP type prescribed, has been appropriately approved and can comply with all conditions of that approval.

2.1.4 Minimum navigation performance specifications (MNPS)

Nil.

2.1.5 Reduced vertical separation minimum (RVSM)-approved aircraft

2.1.5.1 The letter W shall be inserted in Item 10 (Equipment) of the flight plan if the aircraft and operator have received RVSM State approval, regardless of the requested flight level. The aircraft registration shall be inserted in Item 18 of the flight plan.

2.1.6 Non-RVSM-approved aircraft

Nil.

2.1.7 Non-RVSM-approved State aircraft

Nil.

2.1.8 Indication of 8.33 kHz channel spacing capability

Nil.

2.1.9 Route

Nil.

2.1.10 Estimated times

Nil.

2.1.11 Mach number

2.1.11.1 For turbo-jet aircraft intending to operate:

- a) within airspace and/or routes between Santiago and Lima FIRs and the adjacent control areas of the PAC Region; or
- b) at or above FL 250 within the Dakar Oceanic, Recife and Sal Oceanic FIRs; or
- c) along area navigation routes;

the planned true Mach number shall be specified in Item 15 of the flight plan.

2.1.12 Alternative flight level

Nil.

2.1.13 Special handling (STS)

Nil.

2.2 CONTENT – AIR TRAFFIC FLOW MANAGEMENT (ATFM)**2.2.1 Runway visual range (RVR)**

Nil.

2.2.2 Flight plan addressing and distribution

Nil.

2.2.3 Slot allocation exemptions

Nil.

2.3 SUBMISSION

2.3.1 General

Nil.

2.3.2 Amendments

Nil.

2.4 REPETITIVE FLIGHT PLANS (RPLs)

Nil.

Chapter 3. COMMUNICATIONS

3.1 AIR-GROUND COMMUNICATIONS AND IN-FLIGHT REPORTING

3.1.1 Communications equipment

Nil.

3.1.2 Continuous listening watch in uncontrolled airspace

(A2 – Chapters 3 and 5; P-ATM – Chapter 4)

3.1.2.1 All VFR flights, and IFR flights outside controlled airspace, shall maintain a listening watch on the frequency where flight information service is provided and report position unless otherwise authorized by the State overflown.

3.1.3 Position reports

(A2 – Chapters 3 and 5; P-ATM – Chapter 4)

Position and time

3.1.3.1 All times shall be expressed in four digits, giving both the hour and minutes, when making position reports within oceanic control areas.

Next position and time over

3.1.3.2 Time over next position shall be expressed in four digits, giving both the hour and minutes, when making position reports within oceanic control areas.

3.1.3.3 If the estimated time for the next position last reported to air traffic control is found to be in error by three minutes or more, a revised estimated time over shall be transmitted as soon as possible to the appropriate ATS unit.

Level

3.1.3.4 Aircraft cleared for cruise climb shall report their flight level to the nearest 30 m (100 ft).

Note.— Levels so reported, e.g. 354, may not necessarily be flight levels as defined in PANS-OPS, Volume I, Part III, Section 1.

3.1.4 Abbreviated position reports

Nil.

3.1.5 Read-back of VHF channels

Nil.

3.2 MANDATORY CARRIAGE OF 8.33 KHZ CHANNEL SPACING CAPABLE RADIO EQUIPMENT

Nil.

3.3 CONTROLLER-PILOT DATA LINK COMMUNICATIONS (CPDLC)

Nil

3.4 SATELLITE VOICE COMMUNICATIONS (SATCOM)

Nil.

3.5 AERONAUTICAL MOBILE SERVICE**3.5.1 Selective calling (SELCAL)**

Nil.

3.5.2 HF operations

Nil.

3.6 AERONAUTICAL FIXED SERVICE**3.6.1 AFTN rationalization**

Nil.

3.7 RADIO CHANNELS/FREQUENCIES

Nil.

Chapter 4. NAVIGATION

4.1 PERFORMANCE-BASED NAVIGATION (PBN)

Note.— As the South American (SAM) Region transitions to PBN as contained in the Performance-based Navigation Manual (Doc 9613), the contents of 4.1 will be amended.*

4.1.1 Area navigation (RNAV) specifications

4.1.1.1 RNAV 10 (RNP 10)

Note.— RNAV 10 retains the RNP 10 designation, as specified in the Performance-based Navigation Manual (Doc 9613), 1.2.3.5.*

Area of applicability

4.1.1.1.1 For flights on designated controlled oceanic routes or areas within the Canarias FIR (southern sector), Dakar Oceanic, Recife and Sal Oceanic FIRs a lateral separation minimum of 93 km (50 NM) may be applied.

4.1.1.1.2 For flights in the EUR/SAM corridor (Canarias (southern sector), Dakar Oceanic, Recife and Sal Oceanic FIRs), a longitudinal separation minimum of 93 km (50 NM) derived by RNAV may be applied between RNAV-equipped aircraft approved to RNP 10 or better, in accordance with the provisions of the PANS-ATM, 5.4.2.6.

Means of compliance

4.1.1.1.3 For application of 4.1.1.1.1 and 4.1.1.1.2, the aircraft and the operator must have been approved by the State of Registry or the State of the Operator, as appropriate, to meet the following requirements (or equivalent):

- a) aircraft are approved to RNP 10 in accordance with provisions contained in the *Performance-based Navigation Manual* (Doc 9613);* and
- b) operator programmes shall be established to mitigate the occurrence of large navigational errors due to equipment malfunction or operational error:
 - 1) operator in-flight operating drills shall include mandatory navigation cross-checking procedures to identify navigation errors in sufficient time to prevent aircraft from inadvertent deviation from an ATC-cleared route; and
 - 2) the operator shall establish programmes to provide for the continued airworthiness of aircraft navigation systems necessary to navigate to the degree of accuracy required.

*Note.— Detailed guidance material on RNP is contained in the Performance-based Navigation Manual (Doc 9613).**

* In preparation.

4.1.1.2 RNAV 5

Nil.

4.1.1.3 RNAV 2

Nil.

4.1.1.4 RNAV 1

Nil.

4.1.1.5 Pre-PBN navigation specifications

Nil.

4.1.2 Required navigation performance (RNP) specifications**4.1.2.1 RNP 4**

Nil.

4.1.2.2 Basic RNP 1

Nil.

4.1.2.3 Advanced RNP 1

Nil.

4.2 REDUCED VERTICAL SEPARATION MINIMUM (RVSM)**Area of applicability**

4.2.1 The RVSM of 300 m (1 000 ft) shall be applicable in that volume of airspace between FL 290 and FL 410 inclusive in the following FIRs:

Antofagasta, Amazonas, Asuncion, Atlántico to the northwest of the line joining the coordinates 01°39'32"S / 030°13'45"W and 02°23'39"N / 027°48'58"W, Barranquilla, Brasilia, Bogota, Comodoro Rivadavia to the west of the meridian 054°W, Cordoba, Curitiba, Ezeiza to the west of the meridian 054°W, Georgetown, Guayaquil, La Paz, Lima, Maiquetia, Mendoza, Montevideo to the west of the line joining the coordinates 34°00'00"S / 050°00'00"W and 36°22'00"S / 054°00'00"W, Panamá, Paramaribo, Puerto Montt, Punta Arenas, Recife, Resistencia, Rochambeau and Santiago.

4.2.2 RVSM shall also be applicable in either all, or part of, the following FIRs: Canarias* (Southern Sector), Dakar Oceanic,* Sal Oceanic,* Recife and Atlántico (EUR/SAM corridor portion).

Note 1.— The volume of airspace referred to as “CAR/SAM RVSM” airspace includes the FIRs listed in the area of applicability of vertical separation in the CAR and SAM Regional Supplementary Procedures.

Note 2.— The volume of airspace specified in 4.2.2 will be referred to as “EUR/SAM RVSM” airspace.

Means of compliance

(A2 – Chapter 5 and Appendix 3; A6, Part I – Chapters 3, 4 and 7;
A6, Part II – Chapters 3 and 7; A8, Part IIIA – Chapter 8, A11 – Chapter 2)

4.2.3 Operators intending to conduct flights within the SAM Region where RVSM is applied shall require an RVSM approval either from the State of Registry or the State of the Operator. The State of Registry or the State of the Operator, as appropriate, should verify that the height-keeping performance capability of approved aircraft meets the requirements specified in Annex 6, Parts I and II.

Note.— Guidance material regarding the initial achievement and continued maintenance of the height-keeping performance in 4.2.3 is contained in the Guidance Material on the Implementation of a 300 m (1 000 ft) Vertical Separation Minimum (VSM) for Application in the CAR/SAM Airspace and in the EUR/SAM Corridor document, respectively.

* Indicate FIRs contained in ICAO AFI Region.

Chapter 5. SURVEILLANCE

5.1 SECONDARY SURVEILLANCE RADAR (SSR)

(P-ATM – Chapter 8; P-OPS, Vol. I)

5.1.1 Carriage of pressure-altitude reporting SSR transponders

Nil.

5.1.2 Code allocation methodology

Nil.

5.1.3 Assignment of SSR codes

5.1.3.1 Except when otherwise prescribed by bilateral agreement between adjacent ACCs located in different ICAO Regions, ACCs providing air traffic services in FIRs adjacent to other regions should, when properly equipped, assign individual SSR codes to aircraft entering their FIRs from the adjacent regions. Such codes should be selected from the subset allocated to the ACCs for assignment to international flights.

5.1.3.2 As a general rule, an individual SSR code assigned to an international flight may be reassigned to another flight:

- a) three hours after the departure of the lead aircraft; or
- b) when it is estimated that the lead aircraft has landed;

whichever is the earlier.

5.1.4 Operation of pressure-altitude reporting SSR transponders

Nil.

5.1.5 Monitoring of SSR-derived information

Nil.

5.2 SSR MODE S**5.2.1 Carriage and operation of SSR Mode S**

Nil.

5.2.2 Transition between Mode A/C and Mode S

Nil.

5.3 AIRBORNE COLLISION AVOIDANCE SYSTEMS (ACAS)**5.3.1 Carriage and operation of ACAS II**

Nil.

5.4 AUTOMATIC DEPENDENT SURVEILLANCE – CONTRACT (ADS-C)

Nil.

5.5 AUTOMATIC DEPENDENT SURVEILLANCE – BROADCAST (ADS-B)

Nil.

Chapter 6. AIR TRAFFIC SERVICES

6.1 AIR TRAFFIC CONTROL (ATC) CLEARANCES

6.1.1 Content

Nil.

6.1.2 Adherence

Nil.

6.2 SEPARATION

6.2.1 Lateral

(A11 – Attachment B; P-ATM – Chapters 5 and 15)

6.2.1.1 Where aircraft are transiting into airspace with a larger lateral minimum than the airspace being exited, lateral separation will continue to exist provided that:

- a) the smaller separation minimum exists;
- b) flight paths diverge by 15 degrees or more until the larger minimum is established; and
- c) it is possible to ensure, by means approved by the appropriate ATS authority, that the aircraft have the navigation capability necessary to ensure accurate track guidance.

6.2.1.2 Minimum lateral separation between aircraft operating over the Atlantic Ocean, except for flights within Dakar Oceanic, Recife and Sal Oceanic FIRs and as provided for 6.2.1.4, shall be 223 km (120 NM).

6.2.1.3 A lateral separation minimum of 185 km (100 NM) shall be applied between aircraft operating within the Dakar Oceanic, Recife and Sal Oceanic FIRs except as provided for in 6.2.1.4.

6.2.1.4 The minimum lateral separation shall be 93 km (50 NM) between aircraft meeting the provisions in 4.1.1.1.

6.2.2 Longitudinal

(P-ATM – Chapter 5)

6.2.2.1 Except as specified in 6.2.2.2, 6.2.2.3 and 6.2.2.4, the minimum longitudinal separation between turbo-jet aircraft operating over the Atlantic Ocean shall be 30 minutes.

6.2.2.2 The minimum longitudinal separation shall be 15 minutes between turbo-jet aircraft operating:

- a) on the specified routes in the Lima and Santiago FIRs and the adjacent control areas of the PAC Region; or
- b) at or above FL 250 within the Dakar Oceanic, Recife and Sal Oceanic FIRs, provided that the Mach number technique is applied and, whether in level, climbing or descending flight, the aircraft have reported over the same entry point to the ATS routes or a common entry point into oceanic-controlled airspace and follow the same track or continuously diverging tracks.

6.2.2.3 For aircraft operating on designated controlled oceanic routes in the EUR/SAM corridor within the Dakar Oceanic, Recife and Sal Oceanic FIRs, the longitudinal separation shall be in accordance with the PANS-ATM, 5.4.2.4 or 5.4.2.5.

6.2.2.4 The minimum longitudinal separation shall be 93 km (50 NM) derived by RNAV between aircraft meeting the provisions in 4.1.1.1.

6.2.3 Composite

Nil.

6.2.4 Vertical

6.2.4.1 An RVSM of 300 m (1 000 ft) shall be applied between FL 290 and FL 410 inclusive within the FIRs specified in 4.2.1 and 4.2.2.

6.2.4.2 The minimum separation of 6.2.4.1 shall only be applied between aircraft where those aircraft and the operator have been approved by the State of Registry or the State of the Operator, as appropriate, to conduct flights in RVSM airspace.

6.2.4.3 Aircraft that have not received RVSM State approval may be cleared to operate in airspace where RVSM may be applied in accordance with policy and procedures established by the State provided that 600 m (2 000 ft) vertical separation is applied.

6.2.5 Radar

Nil.

6.2.6 Reduction in separation minima

(A11 – Chapter 3; P-ATM – Chapter 5)

6.2.6.1 Where, circumstances permitting, separation minima lower than those specified in 6.2.1 and 6.2.2 will be applied in accordance with the PANS-ATM, appropriate information should be published in AIPs so that users of the airspace are fully aware of the portions of airspace where the reduced separation minima will be applied and of the navigation aids on which those minima are based.

6.2.7 Airspace reservations

Nil.

6.3 MINIMUM FLIGHT LEVEL

(P-ATM – Chapter 4; P-OPS, Vol. I)

6.3.1 Establishment

6.3.1.1 The lowest useable flight level shall be calculated from actual QNH, unless the pressure variation is so small that reference to climatological data is acceptable.

Note 1.— The lowest useable flight level will provide a terrain clearance of at least 300 m (1 000 ft).

Note 2.— MET Offices will inform ATS units when, in abnormal conditions, pressure goes below the minimum climatological value, in order that appropriate steps can be taken to cancel temporarily the use of the lowest flight level or levels that would not ensure the minimum terrain clearance.

6.3.1.2 In determining the transition level, Table 1 should be used. This table shows the transition level directly as a function of the transition altitude (TA) of the aerodrome and of the current QNH altimeter setting value.

Note 1.— The following guidance material is provided to assist in determining the transition level for a transition layer of 150 m (500 ft), 300 m (1 000 ft), etc. It will suffice to add the figure 5, 10, etc., to the transition level shown in the appropriate table.

Note 2.— The columns on the left show the values that can be assigned to transition altitudes and the top lines indicate the pressure ranges in millibars between which the QNH values of the aerodrome fluctuate. The transition level for a transition layer of at least 0 m (0 ft) appears in each consolidated table in the form indicated below.

Note 3.— The values for transition altitude, indicated in metres and feet, are given merely for the purpose of identifying typical transition altitudes. Although pairs of values are given in each column, this does not necessarily mean that they are equivalent.

Example explaining the use of the table

Assuming a given QNH value (e.g. 1 012.5 mb) and a given transition altitude (e.g. 1 410 m), the transition level (under the conditions indicated) is FL 50. Should a transition layer of at least 300 m (1 000 ft) be required, then the flight level corresponding to the transition level is 60.

Since the transition altitude for each location has a fixed value, the only line of the table to be used at all times is that which includes this altitude. For example, in the case of an aerodrome with a transition altitude of 1 560 m (5 200 ft), it could be:

QNH		From 949.1 to 966.5	From 966.6 to 984.2	From 984.3 to 1 002.2	From 1 002.3 to 1 020.5	From 1 020.6 to 1 039.1	From 1 039.2 to 1 057.9
m	TA						
1 560	5 200	70	65	60	55	50	45

Table 1. Method to determine the transition level which will at least coincide with the flight level corresponding to the transition altitude

QNH						From 942.2 to 959.4	From 959.5 to 977.1	From 977.2 to 995.0	From 995.1 to 1 013.2	From 1 013.3 to 1 031.6	From 1 031.7 to 1 050.3															
m	TA	ft																								
↓	QNH	m	TA	ft	QNH	From 945.6 to 963.0	From 963.1 to 980.7	From 980.8 to 998.6	From 998.7 to 1 016.8	From 1 016.9 to 1 035.3	From 1 035.4 to 1 054.1															
						QNH	m	TA	ft	QNH	From 949.1 to 966.5	From 966.6 to 984.2	From 984.3 to 1 002.2	From 1 002.3 to 1 020.5	From 1 020.6 to 1 039.1	From 1 039.2 to 1 057.9										
											QNH	m	TA	ft	QNH	From 952.6 to 970.0	From 970.1 to 987.8	From 987.9 to 1 005.9	From 1 006.0 to 1 024.2	From 1 024.3 to 1 042.8	From 1 042.9 to 1 061.7					
																QNH	m	TA	ft	QNH	From 956.1 to 973.5	From 973.6 to 991.4	From 991.5 to 1 009.5	From 1 009.6 to 1 027.9	From 1 028.0 to 1 046.6	From 1 046.7 to 1 065.5
																					QNH	m	TA	ft		
450	1 500	480	1 600	510	1 700	540	1 800	570	1 900	35	30	25	20	15	10											
600	2 000	630	2 100	660	2 200	690	2 300	720	2 400	40	35	30	25	20	15											
750	2 500	780	2 600	810	2 700	840	2 800	870	2 900	45	40	35	30	25	20											
900	3 000	930	3 100	960	3 200	990	3 300	1 020	3 400	50	45	40	35	30	25											
1 050	3 500	1 080	3 600	1 110	3 700	1 140	3 800	1 170	3 900	55	50	45	40	35	30											
1 200	4 000	1 230	4 100	1 260	4 200	1 290	4 300	1 320	4 400	60	55	50	45	40	35											
1 350	4 500	1 380	4 600	1 410	4 700	1 440	4 800	1 470	4 900	65	60	55	50	45	40											
1 500	5 000	1 530	5 100	1 560	5 200	1 590	5 300	1 620	5 400	70	65	60	55	50	45											
1 650	5 500	1 680	5 600	1 710	5 700	1 740	5 800	1 770	5 900	75	70	65	60	55	50											
1 800	6 000	1 830	6 100	1 860	6 200	1 890	6 300	1 920	6 400	80	75	70	65	60	55											
1 950	6 500	1 980	6 600	2 010	6 700	2 040	6 800	2 070	6 900	85	80	75	70	65	60											
2 100	7 000	2 130	7 100	2 160	7 200	2 190	7 300	2 220	7 400	90	85	80	75	70	65											

6.4 ATS ROUTES

6.4.1 Track systems

Nil.

6.4.2 RNAV

Nil.

6.5 AERODROME OPERATIONS

6.5.1 Area of applicability

Nil.

6.5.2 Intersection take-off

Nil.

6.5.3 Multiple line-ups on the same runway

Nil.

6.5.4 Visual departures

Nil.

6.5.5 Visual approaches

Nil.

6.6 RNAV PROCEDURES

6.6.1 General

Nil.

6.6.2 En route

Nil.

6.6.3 Terminal

Nil.

6.6.4 State aircraft

Nil.

6.7 RNP PROCEDURES**6.7.1 General**

Nil.

6.7.2 En route

Nil.

6.7.3 Terminal

Nil.

6.7.4 State aircraft

Nil.

6.8 COMPOSITE PROCEDURES

Nil.

6.9 MNPS PROCEDURES

Nil.

6.10 RVSM PROCEDURES**6.10.1 General****6.10.1.1 Operation of aircraft not approved for RVSM**

6.10.1.1.1 Except for areas where transition areas have been established, aircraft not approved for RVSM operations in accordance with the requirements of 4.2.3 shall not be allowed to operate in CAR/SAM RVSM airspace and EUR/SAM RVSM airspace.

6.10.1.1.2 Exceptionally, aircraft that have not received RVSM State approval may be cleared to operate in airspace where RVSM may be applied in accordance with policy and procedures established by the State provided that 600 m (2 000 ft) vertical separation is applied.

Note.— Transitions to and from RVSM levels will normally take place in the first FIR in CAR/SAM RVSM airspace and EUR/SAM RVSM airspace.

6.10.2 Transition to/from RVSM airspace

(A2 – Appendix 3; A6, Parts I and II – Chapter 7; A11 – Chapter 3; P-ATM – Chapter 5)

6.10.2.1 In order to allow for the transition of flights to and from CAR/SAM and EUR/SAM RVSM airspace, the ATS authorities responsible for the FIRs concerned may establish designated RVSM transition areas. A 300 m (1 000 ft) vertical separation minimum can be applied between RVSM-approved aircraft within these transition areas.

6.10.2.2 An RVSM transition area shall have a vertical extent of FL 290 to FL 410 inclusive, be contained within horizontal dimensions determined by the provider States, be overlapping with or contained within CAR/SAM RVSM airspace and EUR/SAM RVSM airspace and should have direct controller-pilot communications.

6.11 ATS COORDINATION

6.11.1 Between units providing area control services

Nil.

6.11.2 RNAV

Nil.

6.11.3 RNP

Nil.

6.11.4 RVSM

Nil.

6.11.5 SSR codes

Nil.

6.12 ATS MESSAGES

6.12.1 Flight plan and departure

(P-ATM – Chapter 11)

6.12.1.1 For coordination between ATS units providing air traffic control or air traffic advisory service, where direct speech communications exist, the “step-by-step” method shall be used to transmit information from the ATS unit at the aerodrome of origin to the point where the chain of direct speech communications can be established without interruption.

6.12.1.2 The ATS unit serving the aerodrome where the flight originated shall send a filed Flight Plan (FPL) message, followed by a departure message, to the ATS unit where the chain of direct speech communications is interrupted and also to the remaining ATS units along the route, in accordance with the procedures for the routing of messages contained in the PANS-ATM.

6.12.2 Arrival

(P-ATM – Chapter 10)

6.12.2.1 No arrival message shall be sent in respect of an aircraft for which a transfer message has been sent and acknowledged.

6.12.3 Boundary estimates

Nil.

6.12.4 Computer-assisted coordination

Nil.

6.13 FLIGHT INFORMATION SERVICE (FIS)

6.13.1 Automatic terminal information services (ATIS)

Nil.

6.13.2 SIGMETs

(P-ATM – Chapter 9)

6.13.2.1 Transmission of SIGMET information to aircraft shall be at the initiative of the appropriate ATS unit, by the preferred method of directed transmission followed by acknowledgement, or by a general call when the number of aircraft would render the preferred method impracticable.

6.13.2.2 SIGMET information passed to aircraft shall cover a portion of the route up to two hours' flying time ahead of the aircraft.

6.13.3 Special air-reports

Nil.

6.13.4 Amended aerodrome forecasts

(P-ATM – Chapter 9)

6.13.4.1 Amended aerodrome forecasts shall be passed to aircraft within 60 minutes from the aerodrome of destination, unless the information has been made available through other means.

6.13.5 Landing forecasts

(A11 – Chapter 4)

6.13.5.1 The latest landing forecasts available to the ATS unit, provided it is no more than one hour old, shall always be transmitted to an aircraft, together with the latest report of routine or special observation, when the aircraft requests the latter information.

6.14 ALERTING SERVICE

Nil.

Chapter 7. SAFETY MONITORING

7.1 STRATEGIC LATERAL OFFSET PROCEDURES (SLOP)

Nil.

7.2 AIRSPACE MONITORING

7.2.1 General

Nil.

7.2.2 RNAV

7.2.2.1 A target level of safety (TLS) of 5×10^{-9} fatal accidents per flight hour per dimension shall be established for route systems operating a 93 km (50 NM) lateral separation minimum. The safety level of such airspace shall be determined by an appropriate safety assessment.

Note.— Detailed guidance material on conducting safety assessments is contained in the Manual on Airspace Planning Methodology for the Determination of Separation Minima (Doc 9689).

7.2.2.2 The following criteria are used in the operational assessment of airspace system safety:

- a) the proportion of the total flight time spent by aircraft 46 km (25 NM) or more off the cleared track shall be less than 7.0×10^{-4} ; and
- b) the proportion of the total flight time spent by aircraft between 74 and 110 km (40 and 60 NM) off the cleared track shall be less than 4.1×10^{-5} .

7.2.2.3 Adequate monitoring of flight operations shall be conducted to provide data to assist in the assessment of continuing compliance of aircraft with the lateral navigation performance capabilities of RNP 10 and 7.2.2.1. Such data shall include operational errors due to all causes. A safety assessment shall be carried out periodically, based on the data collected, to confirm that the safety level continues to be met.

Note.— Detailed guidance on monitoring is contained in the Air Traffic Services Planning Manual (Doc 9426) and the Manual on Airspace Planning Methodology for the Determination of Separation Minima (Doc 9689).

7.2.3 RNP

Nil.

7.2.4 RVSM

7.2.4.1 Target level of safety (TLS)

7.2.4.1.1 Application of RVSM in the airspace designated in 4.2.1 shall meet a TLS of 5×10^{-9} fatal accidents per aircraft flight hour due to all causes of risk in the vertical dimension.

7.2.4.1.2 Adequate monitoring of flight operations in the CAR/SAM RVSM airspace and EUR/SAM RVSM airspace shall be conducted to assist in the assessment of continuing compliance of aircraft with the height-keeping capabilities in 4.2.2. Monitoring shall include assessment of other sources of risk to ensure that the TLS specified in 7.2.4.1.1 is not exceeded.

Note.— Details of the policy and procedures for monitoring established by the CAR/SAM Monitoring Agency (CARSAMMA) and South Atlantic Monitoring Agency (SATMA) are contained in the Guidance Material on the Implementation of a 300 m (1 000 ft) Vertical Separation Minimum (VSM) for Application in the CAR/SAM RVSM airspace and EUR/SAM RVSM airspace, respectively.

Chapter 8. AIR TRAFFIC FLOW MANAGEMENT (ATFM)

8.1 PROVISION

Nil.

8.2 APPLICATION

Nil.

8.3 EXEMPTIONS FROM ATFM SLOT ALLOCATION

Nil.

8.4 DEPARTURE SLOT MONITORING

Nil.

8.5 PROMULGATION OF ATFM MEASURES

8.5.1 Strategic ATFM measures

Nil.

8.5.2 Amendments to promulgated strategic ATFM measures

Nil.

8.5.3 ATFM circulars and information

Nil.

8.5.4 Pre-flight information bulletin (PIB)

Nil.

8.5.5 Query procedures

Nil.

Chapter 9. SPECIAL PROCEDURES

9.1 EMERGENCY DESCENT PROCEDURES

9.1.1 Action by the pilot-in-command

Nil.

9.1.2 Action by the ATS unit

Nil.

9.2 CONTINGENCY PROCEDURES INCLUDING TURN-BACKS

Nil.

9.3 AIR-GROUND COMMUNICATION FAILURE

Nil.

9.4 DEGRADATION OR FAILURE OF THE RNAV SYSTEM

9.4.1 Action by the pilot-in-command

Nil.

9.4.2 Action by the ATS unit

Nil.

9.5 LOSS OF VERTICAL NAVIGATION PERFORMANCE REQUIRED FOR RVSM

9.5.1 General

Nil.

9.5.2 Degradation of aircraft equipment – pilot reported

Nil.

9.5.3 Severe turbulence – not forecast

Nil.

9.5.4 Severe turbulence – forecast

Nil.

9.6 EN-ROUTE DIVERSION

Nil.

9.7 INTER-REGION INTERFACE FOR NON-RVSM-APPROVED AIRCRAFT

Nil.

9.8 MANNED BALLOON FLIGHTS

Nil.

Chapter 10. PHRASEOLOGY

10.1 RNAV

Nil.

10.2 RNP

Nil.

10.3 SURVEILLANCE

Nil.

10.4 AERODROME OPERATIONS

Nil.

10.5 ATFM

Nil.

Chapter 11. SEARCH AND RESCUE

11.1 INTERNATIONAL GENERAL AVIATION (IGA)

(A6, Part II – Chapter 6; A6, Part III – Chapter 4)

11.1.1 General aviation aircraft operating over designated areas, land or sea, where search and rescue operations would be difficult, should:

- a) carry appropriate survival equipment; and
 - b) follow the routes or specified procedures if not equipped with two-way radio, except that under special circumstances, the appropriate authority may grant specific exemptions from this requirement.
-

Chapter 12. METEOROLOGY

12.1 AIRCRAFT OBSERVATIONS AND REPORTS

Nil.

Chapter 13. AERONAUTICAL INFORMATION SERVICES

13.1 NOTAM ADDRESSING AND DISTRIBUTION

Nil.

13.2 AERONAUTICAL CHART INFORMATION

13.2.1 Visual procedures

Nil.

— END —

ICAO TECHNICAL PUBLICATIONS

The following summary gives the status, and also describes in general terms the contents of the various series of technical publications issued by the International Civil Aviation Organization. It does not include specialized publications that do not fall specifically within one of the series, such as the Aeronautical Chart Catalogue or the Meteorological Tables for International Air Navigation.

International Standards and Recommended Practices are adopted by the Council in accordance with Articles 54, 37 and 90 of the Convention on International Civil Aviation and are designated, for convenience, as Annexes to the Convention. The uniform application by Contracting States of the specifications contained in the International Standards is recognized as necessary for the safety or regularity of international air navigation while the uniform application of the specifications in the Recommended Practices is regarded as desirable in the interest of safety, regularity or efficiency of international air navigation. Knowledge of any differences between the national regulations or practices of a State and those established by an International Standard is essential to the safety or regularity of international air navigation. In the event of non-compliance with an International Standard, a State has, in fact, an obligation, under Article 38 of the Convention, to notify the Council of any differences. Knowledge of differences from Recommended Practices may also be important for the safety of air navigation and, although the Convention does not impose any obligation with regard thereto, the Council has invited Contracting States to notify such differences in addition to those relating to International Standards.

Procedures for Air Navigation Services (PANS) are approved by the Council for worldwide application. They contain, for the most part, operating procedures regarded as not yet having attained a sufficient degree of

maturity for adoption as International Standards and Recommended Practices, as well as material of a more permanent character which is considered too detailed for incorporation in an Annex, or is susceptible to frequent amendment, for which the processes of the Convention would be too cumbersome.

Regional Supplementary Procedures (SUPPS) have a status similar to that of PANS in that they are approved by the Council, but only for application in the respective regions. They are prepared in consolidated form, since certain of the procedures apply to overlapping regions or are common to two or more regions.

The following publications are prepared by authority of the Secretary General in accordance with the principles and policies approved by the Council.

Technical Manuals provide guidance and information in amplification of the International Standards, Recommended Practices and PANS, the implementation of which they are designed to facilitate.

Air Navigation Plans detail requirements for facilities and services for international air navigation in the respective ICAO Air Navigation Regions. They are prepared on the authority of the Secretary General on the basis of recommendations of regional air navigation meetings and of the Council action thereon. The plans are amended periodically to reflect changes in requirements and in the status of implementation of the recommended facilities and services.

ICAO Circulars make available specialized information of interest to Contracting States. This includes studies on technical subjects.

© ICAO 2008
1/08, E/P1/1300

Order No. 7030
Printed in ICAO

